Use a mechanical vibrator when pouring concrete. As a continuous pour, the 6" slab is monolithic with end posts. All surfaces are rub finished and edges of slab chamfered. Allow for 1/2-inch spaces between precast slabs.

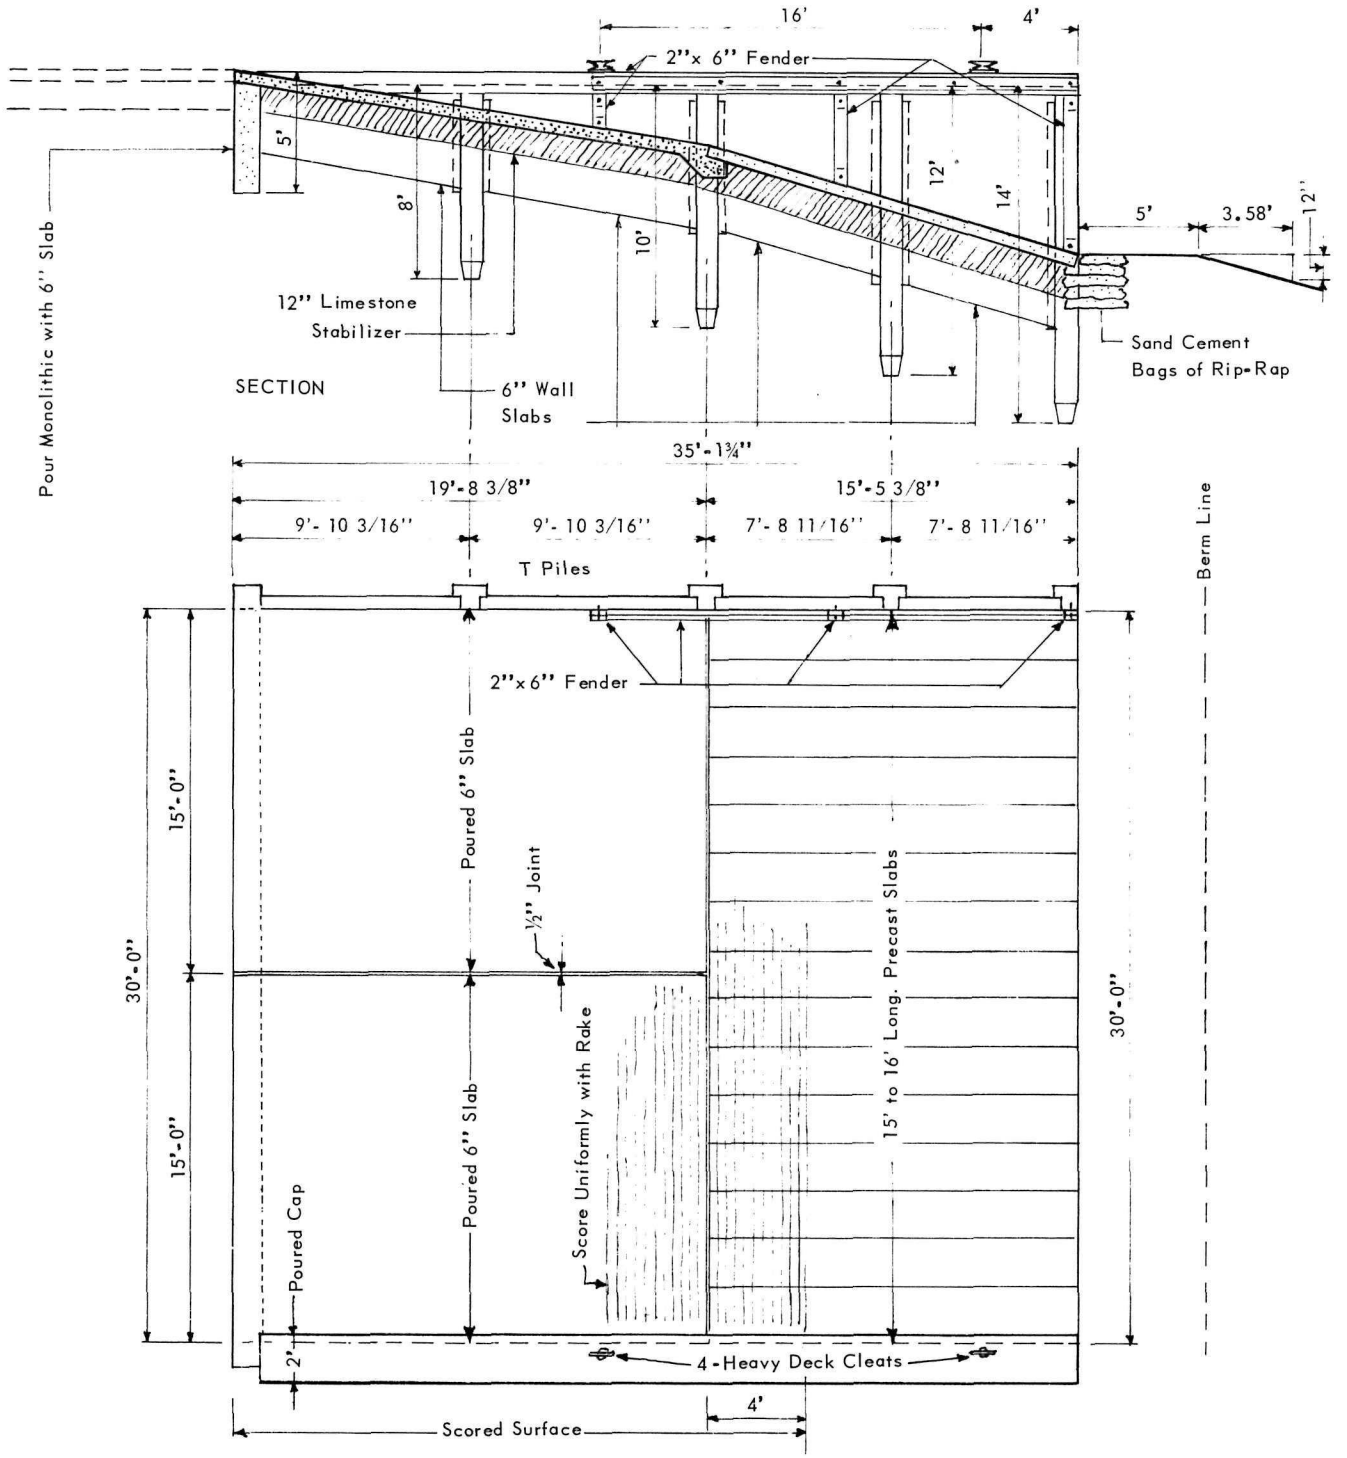

PLAN

United States Department of the Interior, National Park Service **THE PARK PRACTICE PROGRAM** National Conference on State Parks • National Recreation & Parks Association				DUPLEX BOAT RAMP
DATE	August 1970	PLATE	717 H	Contributed by FORT LAUDERDALE Florida
INDEX	R-4887	CONTROL	C-1173-R	