



Wupatki National Monument

Geologic Resources Inventory Report

Natural Resource Report NPS/NRSS/GRD/NRR—2011/416





ON THE COVER

During the 10th century peoples of the Sinagua culture gathered near the current Wupatki Pueblo ruins, gradually building a 100-room pueblo. By 1182, perhaps 85 to 100 people lived at Wupatki Pueblo, the largest building for at least fifty miles. People used stones from the Moenkopi Formation as building blocks for the structures—often utilizing large outcrops as foundations.

THIS PAGE

Citadel Sink, the largest sink in the monument, borders the Citadel and Nalakiku ruins between South Mesa and East Mesa. Sink formation and enlargement is an ongoing process, as water seeps into fractures and fissures and dissolves limestone.

National Park Service photographs by Paul Whitefield (NPS North Central Arizona National Monuments).

Wupatki National Monument

Geologic Resources Inventory Report

Natural Resource Report NPS/NRSS/GRD/NRR—2011/416

National Park Service
Geologic Resources Division
PO Box 25287
Denver, CO 80225

June 2011

U.S. Department of the Interior
National Park Service
Natural Resource Stewardship and Science
Fort Collins, Colorado

The National Park Service, Natural Resource Stewardship and Science office in Fort Collins, Colorado, publishes a range of reports that address natural resource topics of interest and applicability to a broad audience in the National Park Service and others in natural resource management, including scientists, conservation and environmental constituencies, and the public.

The Natural Resource Report Series is used to disseminate high-priority, current natural resource management information with managerial application. The series targets a general, diverse audience, and may contain NPS policy considerations or address sensitive issues of management applicability.

All manuscripts in the series receive the appropriate level of peer review to ensure that the information is scientifically credible, technically accurate, appropriately written for the intended audience, and designed and published in a professional manner. This report received informal peer review by subject-matter experts who were not directly involved in the collection, analysis, or reporting of the data.

Views, statements, findings, conclusions, recommendations, and data in this report do not necessarily reflect views and policies of the National Park Service, U.S. Department of the Interior. Mention of trade names or commercial products does not constitute endorsement or recommendation for use by the U.S. Government.

Printed copies of this report are produced in a limited quantity are only available as long as the supply lasts. This report is available from the Geologic Resources Inventory website (http://www.nature.nps.gov/geology/inventory/gre_publications.cfm) and the Natural Resource Publications Management website (<http://www.nature.nps.gov/publications/nrpm/>).

Please cite this publication as:

Graham, J. 2011. Wupatki National Monument: geologic resources inventory report. Natural Resource Report NPS/NRSS/GRD/NRR—2011/416. National Park Service, Fort Collins, Colorado.

Contents

Lists of Figures and Tables	iv
Executive Summary	v
Acknowledgements	vi
<i>Credits</i>	<i>vi</i>
Introduction	1
<i>Purpose of the Geologic Resources Inventory</i>	<i>1</i>
<i>Regional Location</i>	<i>1</i>
<i>Regional Geology</i>	<i>1</i>
<i>Cultural History</i>	<i>3</i>
Geologic Issues	9
<i>Visitor Safety Issues: Earthcracks and Blowholes</i>	<i>9</i>
<i>Economic Resources</i>	<i>10</i>
<i>Seismic Activity (Earthquakes)</i>	<i>11</i>
<i>Disturbed Land</i>	<i>12</i>
<i>Volcanic Eruptions</i>	<i>12</i>
<i>Global Climate Change</i>	<i>13</i>
<i>Potential Geologic Projects</i>	<i>13</i>
Geologic Features and Processes	19
<i>Bedrock Features</i>	<i>19</i>
<i>Volcanic Rocks of the San Francisco Volcanic Field</i>	<i>20</i>
<i>Cinders and Sinagua Culture</i>	<i>21</i>
<i>Surficial Features</i>	<i>22</i>
<i>Geologic Structures</i>	<i>23</i>
<i>Paleontological Resources</i>	<i>24</i>
<i>Cultural Connections to Geology</i>	<i>25</i>
Geologic History	31
<i>Permian Period (299-251 million years ago)</i>	<i>31</i>
<i>Triassic Period (251-200 million years ago)</i>	<i>32</i>
<i>Jurassic Period (200-145 million years ago)</i>	<i>32</i>
<i>Cretaceous Period (145-65 million years ago)</i>	<i>33</i>
<i>Paleogene and Neogene (Tertiary) Periods (65-2.6 million years ago)</i>	<i>33</i>
<i>Quaternary Period (2.6 million years ago to present day)</i>	<i>34</i>
Geologic Map Data	43
<i>Geologic Maps</i>	<i>43</i>
<i>Source Maps</i>	<i>43</i>
<i>Geologic GIS Data</i>	<i>43</i>
<i>Geology data layers in the Wupatki National Monument GIS data</i>	<i>44</i>
<i>Overview Graphic of Digital Geologic Data</i>	<i>44</i>
<i>Map Unit Properties Table</i>	<i>44</i>
<i>Use Constraints</i>	<i>44</i>
Overview Graphic of Digital Geologic Data	45
Map Unit Properties Table	48
Glossary	55
Literature Cited	61
Additional References	67
<i>Geology of National Park Service Areas</i>	<i>67</i>
<i>Resource Management/Legislation Documents</i>	<i>67</i>
<i>State Geological Survey Websites</i>	<i>67</i>
<i>Geological Society Resources</i>	<i>67</i>
<i>United States Geological Survey (USGS)</i>	<i>67</i>
Appendix: Scoping Session Participants	68
Attachment 1: Geologic Resources Inventory Products CD	

List of Figures

Figure 1. Location map of Wupatki National Monument, Arizona.....	4
Figure 2. Wupatki Pueblo ruins	5
Figure 3. View of San Francisco Mountains from Wupatki National Monument	5
Figure 4. The San Francisco Volcanic Field.	6
Figure 5. Map of selected National Park Service units on the Colorado Plateau	6
Figure 6. General stratigraphic column for the Wupatki National Monument area	7
Figure 7. Artifacts and pottery found in abandoned Pueblos in Wupatki National Monument.....	8
Figure 8. An earthcrack near Lomaki Pueblo, Wupatki National Monument.....	14
Figure 9. Blowhole near Wupatki Ruin	14
Figure 10. Southwest (A) to northeast (A') geologic cross-section	15
Figure 11. Arizona earthquakes and Quaternary-age faults(yellow lines).....	16
Figure 12. Borrow pit site #6, Wupatki National Monument.....	17
Figure 13. Doney Mountain	17
Figure 14. Geologic map and aerial view of SP Crater.....	18
Figure 15. Contact between the Toroweap and Kaibab Formations.....	26
Figure 16. Exposure of the Kaibab Formation.....	26
Figure 17. The Triassic Moenkopi Formation	27
Figure 18. Aerial view of Sunset Crater cinder cone.....	27
Figure 19. Eolian cinder dune in Wupatki National Monument.....	28
Figure 20. A view of Black Point Monocline and Doney Mountain Fault.....	28
Figure 21. Schematic graphics illustrating different fault types.....	29
Figure 22. Pueblos in Wupatki National Monument were often constructed around rock outcrops	30
Figure 23. Geologic timescale.....	35
Figure 24. Late Precambrian paleogeography of North America.....	36
Figure 25. Late Cambrian paleogeography of North America	37
Figure 26. Permian paleogeography of southwestern North America.....	38
Figure 27. Early Triassic paleogeography of southwestern North America	39
Figure 28. Middle Jurassic paleogeography of western North America.....	40
Figure 29. Late Cretaceous paleogeography of North America	41
Figure 30. Normal-angle and low-angle subduction diagrams	42

List of Tables

Table 1. Northern Arizona basins and uplifted areas with hydrocarbon potential.	11
Table 2. Volcanic lava flows in Wupatki National Monument.....	21

Executive Summary

This report accompanies the digital geologic map data for Wupatki National Monument in Arizona, produced by the Geologic Resources Division in collaboration with its partners. It contains information relevant to resource management and scientific research. This document incorporates preexisting geologic information and does not include new data or additional fieldwork.

Located approximately 38 km (24 mi) north of Flagstaff, Wupatki National Monument protects 14,334.83 ha (35,422.13 ac) of arid, rugged land in Coconino County, Arizona. Originally established in 1924 to preserve and protect the Citadel and Wupatki pueblos that were built by the Sinagua Indians in the 1100s, the monument's boundaries have expanded through the years, and now include approximately 2,400 archeological sites.

Wupatki National Monument lies within the southwestern part of the Colorado Plateau, a physiographic province composed of broad plateaus and mesas. Lower Permian (299-270 million years ago) and Lower Triassic (251-245 million years ago) sedimentary rocks dominate the monument's landscape. In the eastern portion of the monument, the reddish sandstones and siltstones of the Triassic Moenkopi Formation offer a vivid color contrast to the gray Permian limestone exposed in western Wupatki. Dark-gray to black, 1-million-year-old basaltic lava occurs as caprock to several mesas in the Wupatki National Monument area. Lava flows resulted from volcanic eruptions in the San Francisco Volcanic Field, located south of the monument. The northeast-to-southwest trending Black Point Monocline separates Permian units from Triassic strata and forms the principal geologic structure in Wupatki.

The primary geologic issues affecting resource management at Wupatki National Monument are visitor safety issues, including blowholes and earthcracks. Other geology-related issues include potential development of economic resources, potential seismic hazards, and future volcanic eruptions.

Vertical cracks or fissures in the bedrock and blowholes pose potential safety issues at Wupatki National Monument. Past tectonic activity has opened fractures and joints in the rocks, locally termed "earthcracks." These cracks may be over 100 m (330 ft) deep, and some have developed into sinkholes as the underlying fractured carbonate rock has dissolved. Although the backcountry in the monument is closed to unguided visitors, an inventory of earthcracks may help resource managers monitor these sites for biological diversity and microclimates.

Blowholes are small openings in the ground that connect to an extensive underground fracture system. Some of the blowholes, however, are large enough for a person to squeeze through. Prior to being capped, the blowhole at

Wupatki Ruin measured over 5.5 m (18 ft) deep. Because of their potential depth, blowholes present a potential safety hazard in the monument. In the past, many blowholes were used as dumping grounds and are now in need of restoration work.

Water is a precious resource in the arid Southwest, and future uranium mining activities will require water resources to process uranium ore. Although mining is prohibited in Wupatki National Monument, future uranium exploration may occur in the Cameron district, north of the monument. Petroleum is produced from northeastern Arizona. Future exploration for either uranium or petroleum will not cause any direct, internal issues within Wupatki National Monument.

Although Wupatki National Monument lies within the active earthquake zone of northern Arizona, the impact of earthquakes on the park is expected to be minor. Historical earthquakes in the region record magnitudes generally less than 3.0 on the Richter scale.

The last volcanic eruption in the San Francisco Volcanic Field occurred approximately 1,000 years ago and resulted in the formation of Sunset Crater. However, future volcanic eruptions are difficult to predict. The potential interaction between magma and cooler groundwater may produce spectacular displays of gas-propelled ash and glowing rock fragments as well as basaltic lava flows. Eruptions from the eastern section of the San Francisco Volcanic Field may deposit ash and lava within the borders of Wupatki National Monument.

The geologic features and processes at Wupatki National Monument record a geologic history that spans approximately 300 million years. The units of geologic time are identified on the geologic timescale (fig. 23). Carbonate strata and marine invertebrate fossils provide evidence of an extensive inland sea that covered much of Arizona during the end of the Paleozoic approximately 251 million years ago. By the Mesozoic, the sea had retreated from the region and the terrestrial, red-colored beds of the Triassic Moenkopi Formation were deposited in lowland fluvial and tidal flat environments. Millions of years later, the Sinagua Indians would use the reddish Moenkopi sandstone as building blocks for their pueblos.

With the advent of volcanism about 6 million years ago in the San Francisco Volcanic Field, basalt began to flow and volcanic ash inundated the region. The Sunset Crater

eruption spread ash and cinders over a broad area and destroyed the Sinagua's farmland, but the ash also retained water. Within a few decades, the Sinagua returned and prospered in the region, during the early-to-mid 1100s.

Quaternary (2.6 million years ago to the present) gravel deposits interbedded with the volcanic flows record vertical erosion rates by the Little Colorado River over the last 2.6 million years. Stream terraces of three different ages are exposed in Wupatki National Monument. Flash floods periodically erode the channel banks of these ephemeral streams, and arroyos have incised into the Doney Cliffs and Black Point Monocline. Precipitation continues to seep into the fractured Paleozoic bedrock, dissolving carbonate rocks, and enhancing the fracture and joint system. Blowholes,

associated with the fracture system, continue to be influenced by the air temperature and pressure and remain a curiosity to visitors.

This report includes a Map Unit Properties Table that describes characteristics such as erosion resistance, suitability for infrastructure development, geologic significance, recreation potential, and associated cultural and mineral resources for each mapped geologic unit.

The glossary contains explanations of many technical terms used in this report, including terms used in the Map Unit Properties Table. The geologic timescale (fig. 23) offers a general reference to some of the geologic activity that has occurred over the 4.6 billion years of Earth history.

Acknowledgements

The Geologic Resources Inventory (GRI) is one of 12 inventories funded by the National Park Service Inventory and Monitoring Program. The GRI is administered by the Geologic Resources Division of the Natural Resource Stewardship and Science Directorate.

The Geologic Resources Division relies heavily on partnerships with institutions such as the U.S. Geological Survey, Colorado State University, state geologic surveys, local museums, and universities in developing GRI products.

Special thanks to: Paul Whitefield, Natural Resource Specialist for the North Central Arizona National Monuments, for providing many photographs and updated information throughout the report; Dave Brumbaugh, Northern Arizona University, for his updated information on seismic activity in the area; Dale Pate and Andrea Croskrey, both from the NPS Geologic Resources Division, for their input and suggestions regarding cave issues in the park; Pat O'Dell, NPS Geologic Resources Division, for providing information regarding economic resources in the area; and Tim Connors, NPS Geologic Resources Division, for providing photographs.

Credits

Author

John Graham (Colorado State University)

Review

Michael Conway (Arizona Geological Survey)
Philip Reiker (NPS Geologic Resources Division)
Jason Kenworthy (NPS Geologic Resources Division)

Editing

Steve Hoffman (Write Science Right)

Digital Geologic Data Production

Philip Reiker (NPS Geologic Resources Division)
Aaron Rice (Colorado State University)
Jim Chappell (Colorado State University)
Stephanie O'Meara (Colorado State University)
Ron Karpilo (Colorado State University)

Digital Geologic Data Overview Layout Design

Benton Line (Colorado State University)
Philip Reiker (NPS Geologic Resources Division)

Introduction

The following section briefly describes the National Park Service Geologic Resources Inventory and the regional geologic setting of Wupatki National Monument.

Purpose of the Geologic Resources Inventory

The Geologic Resources Inventory (GRI) is one of 12 inventories funded by the National Park Service (NPS) Inventory and Monitoring Program. The GRI, administered by the Geologic Resources Division of the Natural Resource Stewardship and Science Directorate, is designed to provide and enhance baseline information available to park managers. The GRI team relies heavily on partnerships with institutions such as the U.S. Geological Survey, Colorado State University, state geologic surveys, local museums, and universities in developing GRI products.

The goals of the GRI are to increase understanding of the geologic processes at work in parks and to provide sound geologic information for use in park decision making. Sound park stewardship requires an understanding of the natural resources and their role in the ecosystem. Park ecosystems are fundamentally shaped by geology. The compilation and use of natural resource information by park managers is called for in section 204 of the National Parks Omnibus Management Act of 1998 and in NPS-75, Natural Resources Inventory and Monitoring Guideline.

To realize these goals, the GRI team is systematically conducting a scoping meeting for each of the 270 identified natural area parks and providing a park-specific digital geologic map and geologic report. These products support the stewardship of park resources and are designed for non-geoscientists. Scoping meetings bring together park staff and geologic experts to review available geologic maps and discuss specific geologic issues, features, and processes.

The GRI mapping team converts the geologic maps identified for park use at the scoping meeting into digital geologic data in accordance with their Geographic Information Systems (GIS) Data Model. These digital data sets bring an interactive dimension to traditional paper maps. The digital data sets provide geologic data for use in park GIS and facilitate the incorporation of geologic considerations into a wide range of resource management applications. The newest maps contain interactive help files. This geologic report assists park managers in the use of the map and provides an overview of park geology and geologic resource management issues.

For additional information regarding the content of this report and current GRI contact information please refer to the Geologic Resources Inventory web site (<http://www.nature.nps.gov/geology/inventory/>).

Regional Location

Located in Coconino County, Arizona, Wupatki National Monument protects 14,334.83 ha (35,422.13 ac) of high desert grasslands, mesas, buttes, and volcanic hills (fig. 1). The monument was originally established in 1924 to preserve the Citadel and Wupatki pueblos (figs. 2, 3), but the boundaries have been adjusted over the years to include additional pueblos and other archeological resources. Approximately 2,400 archeological sites have been catalogued at Wupatki National Monument (Ort et al. 2008).

Spectacular views within and beyond the monument include outcrops of red sandstone juxtaposed against white limestone, cinder cones and lava flows of the San Francisco Volcanic Field (fig. 4), and the Painted Desert that stretches southeast from Wupatki to Petrified Forest National Park (KellerLynn 2010). Wupatki's Visitor Center lies approximately 38 km (24 mi) northeast of Flagstaff, Arizona, and a paved Coconino County road provides a loop from Sunset Crater National Monument (about 16 km [10 mi] north of Flagstaff) to Wupatki National Monument and back to U.S. Highway 89 (fig. 1). The Little Colorado River forms the eastern border between the monument and the Navajo Indian Reservation.

Without the relatively young volcanoes of the San Francisco Volcanic Field, the region between Flagstaff and the Grand Canyon would be a flat, arid plateau. Humphreys Peak, one of the peaks of San Francisco Mountain, rises to an elevation of 3,850 m (12,633 ft) and is Arizona's highest peak (fig. 3) (Priest et al. 2001). In contrast, the elevation of Wupatki National Monument ranges from 1,500 to 1,800 m (5,000 to 6,000 ft).

Dry, windy summers with brief thunderstorms characterize this high desert region. Most of Wupatki's annual 20 cm (8 in) of precipitation occurs from thunderstorms developing from July to September.

Regional Geology

Wupatki National Monument lies within a large geological province known as the Colorado Plateau, a roughly circular region bordered by the Rocky Mountains and the Basin-and-Range provinces (fig. 5). High plateaus and isolated mountains characterize the Colorado Plateau, which includes parts of Arizona, Utah, Colorado, and New Mexico. The Colorado River, for which the plateau was named, drains at least 90% of the plateau. Buffered from the compressive forces that formed the Rocky Mountains and the extensional (pull-apart) tectonics that produced the distinctive Basin-and-Range topography, the Colorado Plateau experienced subdued structural deformation during the past 65

million years. This deformation resulted in broad, regional uplift, gentle folding, and fractured and jointed rock.

Plateaus and mesas characterize the Colorado Plateau. Wupatki National Monument lies on the Coconino Plateau, a vast tableland within the Colorado Plateau bordered by the Grand Canyon to the north and Little Colorado River to the east. Smaller mesas in the central and western part of the monument include West Mesa, South Mesa, East Mesa, and North Mesa.

Upper Paleozoic and lower Mesozoic sedimentary rock strata dominate the landscape at Wupatki National Monument (fig. 6). Approximately 92 m (300 ft) of Lower Permian (299-270 million years ago) Kaibab Formation (map units Pkh and Pkf in the Map Unit Properties Table) and Toroweap Formation (Pt) form the extensive Antelope Prairie in the western part of the monument (Billingsley et al. 2007A). These Paleozoic rocks form cliffs and ledges of calcareous sandstones and cherty limestones, which contain abundant quartz. Many of the same formations are mapped and exposed within Walnut Canyon National Monument to the south (Graham 2008).

The Antelope Prairie forms the western limb of the Black Point Monocline (fig. 1), a northeast-trending asymmetric fold that bisects the monument (see Geologic Map Data section). Monoclines have one limb of relatively horizontal strata and one limb of more steeply dipping strata. Strata on the western limb of the Black Point Monocline are nearly horizontal whereas strata on the eastern limb of the fold dip as much as 30° to the northeast (Billingsley et al. 2007A; Billingsley et al. 2007B).

Excellent exposures of Paleozoic strata in the Grand Canyon, northwest of Wupatki National Monument, define the subsurface stratigraphy in the region. In the Grand Canyon, the Toroweap Formation overlies the Lower Permian Coconino Sandstone (labeled Pc on the geologic cross-sections in Attachment 1) although there is a substantial break or gap in the stratigraphic record between the two units (this gap is called an “unconformity”). The Coconino Sandstone contains the local aquifer. Subsurface well logs indicate that the Coconino Sandstone is about 183 m (600 ft) thick beneath the Wupatki National Monument area (Billingsley et al. 2007A).

East of the Black Point Monocline, red sandstone and siltstone of the Lower Triassic (251-237 million years ago) Moenkopi Formation (TRmhm, TRmss, and TRmw) dominate the landscape. The Holbrook and Moqui Members (TRmhm) of the Moenkopi Formation may extend into the Middle Triassic. The contact between the gray-white Kaibab Formation and the red Moenkopi Formation represents an unconformity, a geologic feature that denotes a period of erosion and/or nondeposition. As much as 67 m (220 ft) of Moenkopi Formation was eroded from the monument prior to

deposition of the Upper Triassic Chinle Formation (229-200 million years ago). Remnants of Chinle Formation sandstones, siltstones, and shale are exposed in the Little Colorado River Valley, northeast of Wupatki National Monument (map units TRcp and TRcs) (Billingsley et al. 2007A).

Pliocene (5.3-2.6 million years ago) and Pleistocene (2.6 million years ago-11,700 years ago) volcanic rocks in the western and southern part of the monument form an erosion resistant caprock over Triassic strata. Most of the volcanic units in the monument are basalt, a dark-colored rock composed primarily of the feldspar mineral plagioclase. Basalt flows (Qmcb, Qb, Qmb, Qmlp, Qwb, QTb, and Tbpb), pumice (Qsfp), basalt dikes (Qmbi), and pyroclastic deposits (Qmp) are part of the San Francisco Volcanic Field, a spectacular landscape covering approximately 4,700 sq km (1,800 sq mi) (fig. 4). The field contains more than 600 volcanoes that have erupted during the past 6 million years (Priest et al. 2001). San Francisco Mountain is the field's only stratovolcano, a type of volcano formed by successive layers of lava and pyroclastic material erupted from a central vent. Many of the Cascade Range volcanoes, such as Mount St. Helens and Mount Rainier, are stratovolcanoes. The youngest volcano in the field, Sunset Crater, erupted less than 1,000 years ago. Southwesterly winds carried sand-sized particles of ash from the Sunset Crater eruption and deposited them in cinder sand sheets (Qsc) and dunes (Qdc) in the monument area. For more information on Sunset Crater Volcano National Monument, see Thornberry-Ehrlich (2005).

The Little Colorado River, the principal stream drainage in the area, provides an abundant supply of sand and silt (Qs, Qf, Qg1, and Qg2) that is transported by southwesterly winds to form extensive sand sheet and dune deposits (Qd, Qes, Qdl, and Qdb) on the northeast side of the river (Billingsley et al. 2007A).

Landslide deposits (Ql), and talus and rockfall deposits (Qtr), form steep slopes below the basalt of Woodhouse Mesa south of the Visitor Center. In the western part of the monument, fresh water sediments (Qps) accumulated in intermittent lakes in Hulls Canyon, near East Mesa, and near Red House Basin. These lakes were most likely important sources of fresh water to the early, prehistoric inhabitants of the Wupatki National Monument area.

The northeast-trending Doney Mountain Fault and Black Point Monocline are the principal structural features in the monument (see the Features and Processes section). Folding and movement along the fault have raised the Coconino Plateau above the adjacent Little Colorado River Valley by 150 to 215 m (500 to 700 ft) (Billingsley et al. 2007A).

Washes and arroyos cut into the Doney Cliffs, and drain to the Little Colorado River. The larger washes contain intermittent (ephemeral) streams that have incised deeply into the Kaibab and Moenkopi Formations.

Cultural History

The intimate relationship between geology and human occupation at Wupatki National Monument spans at least 10,000 years. Two spear points, dating back to 11,000 and 8,000 years ago, are evidence of nomadic hunters and gatherers who roamed the desert region until about 500 CE (“Common Era” [CE] is preferred to “AD”). The gravel terraces along the Little Colorado River provided stones for tool making (fig. 7).

Beginning in the 7th century CE, Sinagua Indians entered the Wupatki area. The Sinagua found water in random depressions and ephemeral lakes in the region and used the water to successfully farm the region between the San Francisco Peaks and the Verde Valley, south of Flagstaff (Noble 1991).

Northern Sinagua sites date from approximately 675 CE. By 900 CE, their population had grown and they had established trading relations with the Kayenta Anasazi people to the north and the Hohokam to the south (Noble 1991). Early communities consisted of pit houses that were subsequently covered by the ash and cinders of the Sunset Crater eruptions between 1100 and 1050 (Self et al. 2010).

Lava flows, cinders, and ash also destroyed the Sinagua’s farmland in the vicinity of Sunset Crater. However, a few decades later, the Sinagua discovered that the thin ash layer retained moisture, decreased evaporation, and conserved heat, thus prolonging the growing season. In addition, increased rainfall in the century following 1064 CE brought more water to the region. The Sinagua moved back to the area and were joined by other southwest cultures, including the Kayenta Anasazi, Cohonina, Hohokam, and Cibola people (Noble 1991).

Between 1150 and 1250 CE, large villages were established, and Sinagua settlements extended into the Wupatki and Walnut Canyon areas. Wupatki, the main ruin in Wupatki National Monument, means “long house” in the Hopi language. This pueblo was the tallest, largest, and probably the most important pueblo in the San Francisco Mountain region (fig. 2, cover). The pueblo consisted of 100 rooms with a community room and ballcourt. The Moenkopi Formation provided the red sandstone blocks for their pueblos. By 1182, Wupatki was home to 85 to 100 people and within a day’s walk for a population of several thousand (National Park Service 2006).

By 1250, the Sinagua abandoned Wupatki and migrated northeast. By the early 1400s, the Sinagua culture began to blend with the Hopi culture (Noble 1991). The Hopi consider the ancestral Sinagua who lived and died at Wupatki to be spiritual guardians of the pueblos. In Hopi legend, Wupatki is not abandoned but remembered and cherished (National Park Service 2006).

Looking for an overland route from Santa Fe to California in 1851, Captain Lorenzo Sitgreaves became the first Euro-American to document the ruins at Wupatki. Since Sitgreaves’ expedition was not archaeological, he did not spend much time exploring the ruins. He did, however, have the expedition’s artist, Richard Kern, make a drawing of Wupatki ruin. Kern’s drawing represents the first known depiction of Wupatki Pueblo by Euro-Americans (Northern Arizona University, Department of Anthropology 2010).

Trade opportunities with the Navajo and Hopi in the Wupatki area led to the establishment of two trading posts in the late 1800s and early 1900s. In 1878, John Lorenzo Hubbell purchased a trading post near Ganado, Arizona, approximately 150 km (95 mi) east of Wupatki National Monument. The Hubbell family operated the trading post until the National Park Service purchased it in 1967 and established the Hubbell Trading Post National Historic Site.

The first well-documented expedition to Wupatki came in 1900 when archeologist Jesse W. Fewkes became the first to sketch, map, describe, and possibly excavate portions of Wupatki ruin. His drawing of Wukoki Pueblo is featured on the cover of the January 1904 issue of “Records of the Past” a magazine which also contained an article by Fewkes. In his article, Fewkes advocated for the preservation of the Wupatki ruins.

Beginning in 1916, Harold S. Colton and his wife, Mary Russell-Ferrell Colton, began more than 50 years of archaeological exploration in northern Arizona. Fewkes and the Coltons advocated for national monument status for Wupatki, but little was done to preserve the ruin until 1924 when President Calvin Coolidge granted Wupatki and a few surrounding ruins national monument status.

Since 1924, expeditions to Wupatki Pueblo have collected wood samples for dendrochronology (tree-ring dating), rock samples for paleomagnetic dating, and other artifacts. Dendrochronology and paleomagnetic rock dating have helped establish precise dates for the construction of various ruins at Wupatki National Monument. From 1981 to 1987, archeologist Bruce Anderson photographed, mapped, and analyzed over 2,700 sites within the monument. In 1996, Northern Arizona University’s (NAU) Anthropology Laboratories received a grant from the Southwest Parks and Monuments Association (now Western National Parks Association) to map Wupatki pueblo and inventory artifacts using global positioning system (GPS) technology. Wupatki National Monument continues to provide research opportunities for studying ancient pueblo communities.

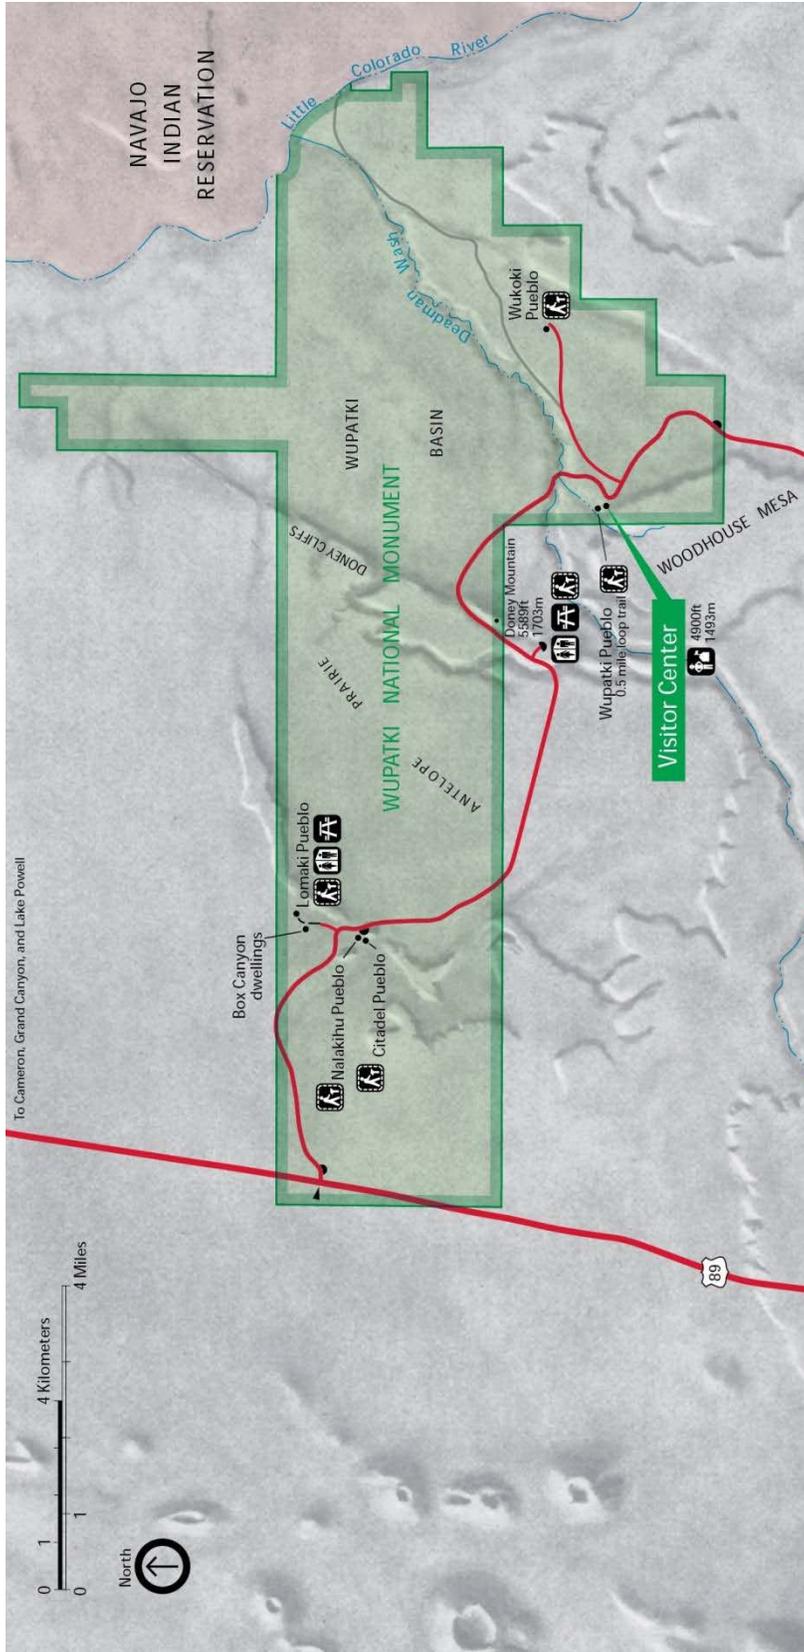


Figure 1. Location map of Wupatki National Monument, Arizona. A Coconino County loop road connects Sunset Crater Volcano National Monument (to the south) with Wupatki National Monument. Note the volcanic cones of the San Francisco Volcanic Field to the west of the monument (fig. 4). National Park Service map.



Figure 2. Wupatki Pueblo ruins, Wupatki National Monument. This three-story tall pueblo was occupied longer than any of the other ruins of the region. Wood, textiles, and perishable material have been preserved to an unusual extent due to the extreme aridity and excellent drainage of the region. National Park Service photograph courtesy Tim Connors (NPS Geologic Resources Division).



Figure 3. View of San Francisco Mountains from Wupatki National Monument. The Citadel Pueblo, resembling a fortress at the top of a hill, stands in the foreground. San Francisco Mountain is an eroded stratovolcano and includes Humphreys Peak, Arizona's highest point at 3,850 m (12,633 ft). The summit of Humphreys Peak is over 1,800 m (6,000 ft) higher than the topography at Wupatki National Monument. National Park Service photograph by Paul Whitefield (NPS North Central Arizona National Monuments).

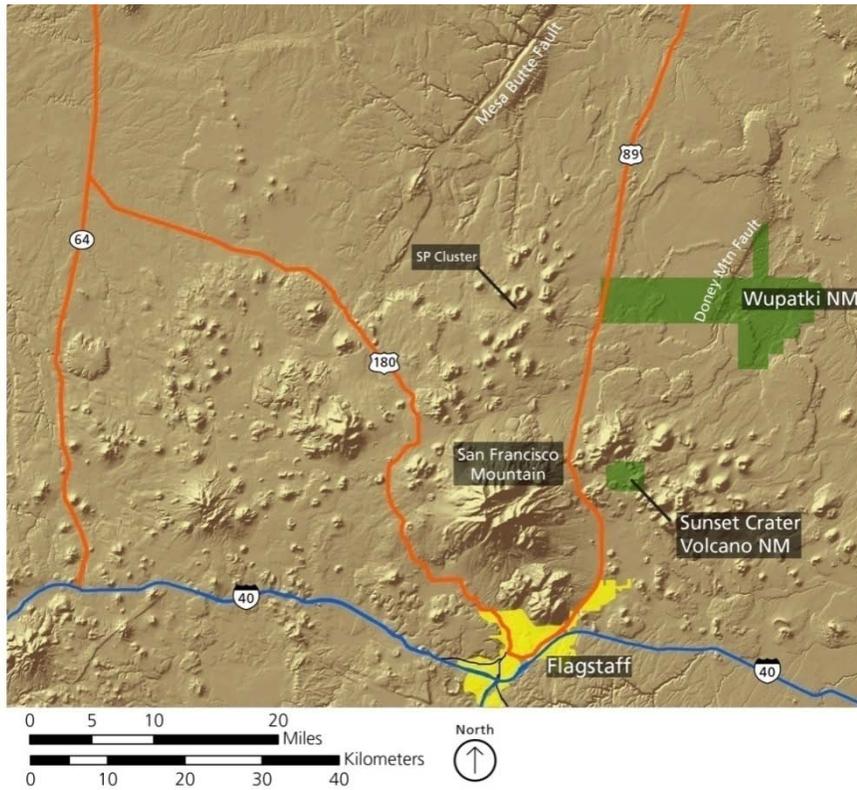


Figure 4. The figure shows many of the more than 600 volcanic vents that have erupted during the past 6 million years in the San Francisco Volcanic Field. Lava flows (flat lobate features) can be recognized by their proximity to vents. Larger tectonic structures such as the northeast-trending Mesa Butte Fault and Doney Fault (which cuts through Wupatki National Monument) are also visible. Map by Philip Reiker (NPS Geologic Resources Division) after Priest et al. (2001).

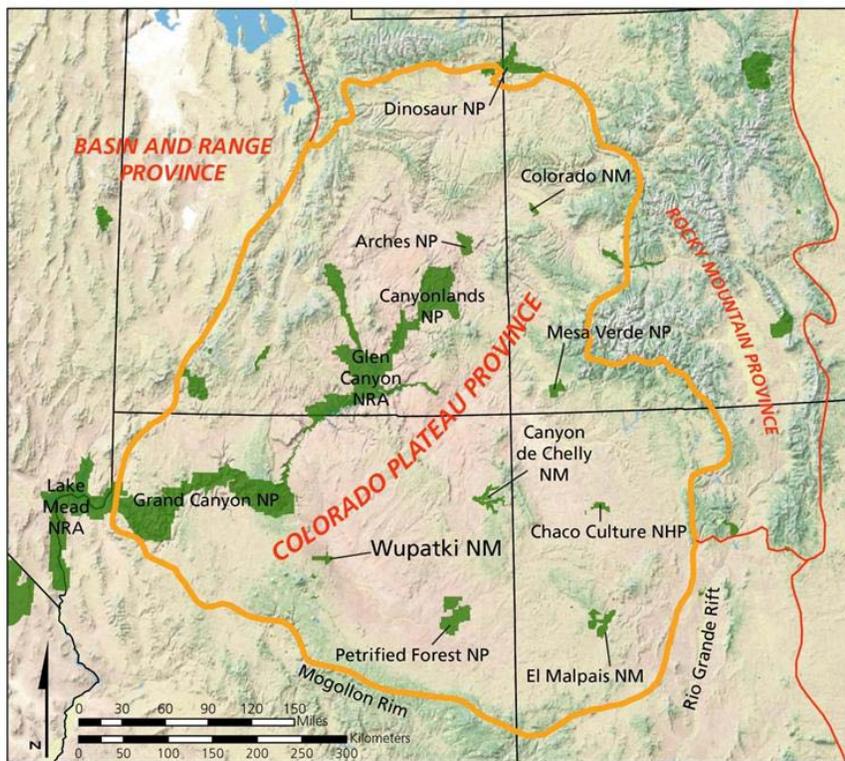


Figure 5. Map of selected National Park Service units on the Colorado Plateau, in green, and the immediate vicinity. Wupatki National Monument lies on the southwestern margin of the Colorado Plateau. The Basin-and-Range Province, with its distinctive topography of narrow, north-south trending mountain ranges and basins, borders the Colorado Plateau to the west, northwest, and southwest. The Rocky Mountain Province borders the Colorado Plateau to the east. Map by Philip Reiker (NPS Geologic Resources Division).

Era	Period (age in millions of years)		Formations/Units		Brief Description			
CENOZOIC	Quaternary (2.6 to present)	Holocene (0.117 to present)	Artificial fill		Excavated alluvium and bedrock.			
			Alluvial fans, floodplain, dune and sheet sand, and terrace-gravel deposits		Unconsolidated deposits of silt, sand, pebbles, cobbles, and some boulders.			
		Holocene and Pleistocene (2.6 to present)	Alluvial fan, alluvium, eolian, and older terrace-gravel deposits		Unconsolidated deposits of clay, silt, sand, and pebbles. Partly cemented with calcite and gypsum.			
			Landslide, talus, and rockfall deposits		Unsorted rock debris and angular rocks and boulders of red sandstone and siltstone and gray limestone.			
			Valley-fill deposits		Silt, sand, and lenses of gravel.			
	Neogene (23 to 2.6)	Pleistocene (2.6 to 0.11)	Basalt flows, pumice, basalt dike, pyroclastic deposits		Volcanic rocks of the San Francisco Volcanic Field. Basalt in various flows, a dike, and pyroclastic deposits and rhyolite airfall pumice associated with San Francisco Mountain.			
			Miocene (23 to 5.3)	Old stream-channel deposits		Interbedded siltstone, sandstone, arkosic granite, and conglomerate.		
	Paleogene (66 to 23)	Oligocene (34 to 23)		Regional Unconformity (significant break or gap in the stratigraphic record)				
		Eocene (56 to 34)						
		Paleocene (66 to 56)						
	MESOZOIC	Cretaceous (146 to 66)		Regional Unconformity (significant break or gap in the stratigraphic record)				
Jurassic (200 to 146)								
Triassic (251 to 200)		Upper (229 to 200)	Chinle Formation				Petrified Forest Member	Slope-forming mudstone, siltstone, and interbedded sandstone. Petrified logs and wood fragments.
							Shinarump Member	Cliff-forming sandstone and conglomeratic sandstone.
		Middle (246 to 229)	Regional Unconformity					
Lower (251 to 246)		Moenkopi Formation					Holbrook and Moqui Members	Red-brown, slope-forming claystone, siltstone, and sandstone.
							Shnabkaib Member	Yellowish-brown, cliff-forming calcareous siltstone and sandstone.
			Wupatki Member	Red-brown, slope-forming siltstone, sandstone, and crumbly mudstone.				
Regional Unconformity								
PALEOZOIC	Permian (299 to 251)	Cisuralian (Lower) (299 to 271)	Kaibab Formation	Harrisburg Member	Red to brown, slope-forming gypsum, siltstone, sandstone, and limestone.			
				Fossil Mountain Member	Light-gray, cliff-forming fossiliferous, cherty, sandy limestone and minor dolomite.			
		Toroweap Formation, undivided		White, cliff-forming, cross-bedded sandstone.				

Figure 6. General stratigraphic column for the Wupatki National Monument area. All of these units are exposed within the monument except for the Chinle Formation. Adapted from Billingsley and others (2007A). See the Map Unit Properties Table for more detail.



Figure 7. Artifacts and pottery found in abandoned Pueblos in Wupatki National Monument. National Park Service photographs courtesy Paul Whitefield (NPS North Central Arizona National Monuments).

Geologic Issues

The Geologic Resources Division held a Geologic Resources Inventory scoping session for Wupatki National Monument on June 28-29, 2001, to discuss geologic resources, address the status of geologic mapping, and assess resource management issues and needs. This section synthesizes the scoping results, in particular those issues that may require attention from resource managers. Contact the Geologic Resources Division for technical assistance.

The primary geologic issues identified at the scoping session for Wupatki National Monument included visitor safety issues and potential economic resources, specifically uranium and petroleum. In addition, potential seismic and volcanic hazards may impact Wupatki National Monument. The monument lies within the active seismic zone of Northern Arizona, and within the San Francisco Volcanic Field. The Sunset Crater erupted approximately 1,000 years ago, and future eruptions in the San Francisco Volcanic Field are probable. External issues, such as global climate change, may influence the springs and seeps in the monument, which may then lead to ecosystem modifications.

The monument also contains areas where material has been removed for road construction and other purposes. Some of these areas may impact cultural sites in the monument. As an initial step toward restoring all the disturbed areas in the monument, the NPS Geologic Resources Division completed a disturbed land inventory in 2000, and recommended action to restore twelve borrow pits in the monument (Greco et al. 2000). Erosion is the principal geologic issue associated with the borrow pits.

Visitor Safety Issues: Earthcracks and Blowholes

A more complete description of the geologic processes that resulted in earthcracks and blowholes may be found in the Surficial Features subheading of the Features and Processes section. These geologic features present potential safety hazards to monument visitors. The backcountry of Wupatki National Monument is closed to unguided visitors, so access to earthcracks and blowholes away from the designated visitor areas is limited.

Earthcracks

Tectonic activity in the past generated surface cracks, locally called “earthcracks,” associated with faults and regional joint fractures in Wupatki’s bedrock (fig. 8). Some of the cracks that have been explored are as much as 152 m (500 ft) deep and may pose safety hazards to visitors (Blyth 1995; Billingsley et al. 2007A). All of the earthcracks in the monument are closed to public entry (Paul Whitefield, NPS North Central Arizona National Monuments, Natural Resource Specialist, written communication, January 5, 2011).

Some earthcracks in the Kaibab Formation limestone have widened into ‘sinks’ and ‘sinkholes’ along open faults and joints, as water has dissolved the fractured carbonate rock. These features are not true karst dissolution/collapse features that may form in carbonate terrain, but are collapse zones or “mini-basins” that formed along minor faults associated with the larger earthcrack system in Wupatki National Monument (Paul Whitefield, NPS North Central Arizona National Monuments, Natural Resource Specialist, written communication, January 5, 2011).

Citadel Sink, the largest sink in the monument, borders the Citadel and Nalakiku ruins between South Mesa and East Mesa (inside front cover) (Billingsley et al. 2007A). This depression measures approximately 150 m (500 ft) by 200 m (650 ft). Sink formation and enlargement is an ongoing process, as water continues to seep into fractures and fissures and dissolve limestone.

Earthcracks are part of the earthcrack/fissure/blowhole system in the sedimentary rocks of western Wupatki National Monument. The last earthcrack inventory was conducted in 1976. The largest of three surveyed earthcracks was slightly less than 100 m (330 ft). One of the inventoried earthcracks contained two endemic pseudoscorpions and a winter hibernaculum for one sensitive bat species (Paul Whitefield, NPS North Central Arizona National Monuments, Natural Resource Specialist, written communication, January 5, 2011). In 2007, the National Park Service proposed an inventory and video documentation of vertebrate and invertebrate cave-dwelling fauna in the monument to enhance protection of those resources under the Cave Protection Act of 1988 (National Park Service 2007A).

Earthcracks and associated features are non-renewable geological resources. A cave inventory and subsequent monitoring plan may help to preserve these resources. Paul Whitefield, Natural Resource Specialist for North Central Arizona National Monuments, has proposed a new baseline microclimate monitoring and biological inventory for the earthcracks in the monument. Pollen and insect remains that may collect on earthcrack floors may provide information on ecosystem development and regional climatic change (Mike Conway, Arizona Geological Survey, Geologist, written communication, February 6, 2011). In addition, Rickard Toomey describes methods to monitor several parameters, or vital signs, associated with caves in a variety of geological

settings (Toomey 2009). These vital signs include: cave meteorology; airborne sedimentation; direct visitor impacts; permanent or seasonal ice; cave drip and pool water; microbiology; stability-breakdown, rockfall and partings; mineral growth; surface expressions and processes; regional groundwater levels and quantity; and fluvial processes. Some of Toomey's parameters may apply to the earthcracks at Wupatki National Monument and provide valuable monitoring information for resource managers.

Blowholes

Blowholes at Wupatki National Monument generate a great deal of interest. These small openings create a natural fan or vacuum as air either blows in or out of the hole. Blowholes are typically only a few centimeters in diameter, but they connect to long, narrow fractures in the subsurface. Some of the blowholes, however, are large enough for a person to squeeze through. Spelunkers were able to descend 5.5 m (18 ft) into the blowhole at Wupatki Ruin before it was capped by a masonry box in 1965 (fig. 9). They found that the opening connected to a large underground fracture, which proved to be too constricted to explore (National Park Service 2007B).

Because of their depth, blowholes at Wupatki National Monument present potential safety issues. According to participants at the scoping workshop in 2001, many of the blowholes were used as dumping grounds in the past, and are now in need of some restoration work.

Economic Resources

During the scoping meeting, participants mentioned that Wupatki National Monument may contain uranium and petroleum potential. When the Federal government established the monument, the mineral rights were not included in the purchase. However, the Mining in Parks Act of September 28, 1976 prohibits active mining in National Park Service units. In addition, according to the Surface Mining Control and Reclamation Act (1977) the NPS does have legal authority to provide input during the permitting process of mining activities within park viewsheds. The Surface Mining Control and Reclamation Act of 1977 controls surface coal mining and reclamation activities on both federal and non-federal lands.

The major metallic mineral mining districts in Arizona form a northwest-trending belt south of the Colorado Plateau. The Colorado Plateau, however, contains abundant reserves of uranium, and the only petroleum production in the state.

From 1950 to 1976, some of the richest helium-bearing gas in the world was produced from pore spaces in the Permian-aged Coconino Sandstone in the Holbrook Basin, southeast of the park (Rauzi and Fellows 2003; Arizona Geological Survey 2010). Helium deposits may also exist in the Coconino Sandstone beneath Wupatki National Monument (Mike Conway, Arizona Geological Survey, Geologist, written communication, February 6, 2011). Coal, potash, and industrial minerals are also

produced in northern Arizona, although production and exploration is well beyond the boundaries of the monument.

The eastern portion of the San Francisco Volcanic Field may also contain potential geothermal resources. Specifically, an east-west band of youthful volcanism immediately north of Sunset Crater appears promising as a potential electricity-grade geothermal resource (Duffield et al. 2000; Morgan et al. 2004). Physical manifestations of the deep geothermal system, such as geysers, hot springs, and fumaroles, are missing in the San Francisco Volcanic Field, but recent data suggest that deep geothermal gradients are being masked by a surface groundwater recharge system on the Colorado Plateau (Morgan et al. 2004; Crossey et al. 2006). With regard to Wupatki National Monument, wells drilled through the Kaibab Formation beneath the monument to test geothermal potential may disrupt the complex earthcrack-blowhole system.

Uranium Ore

Uranium exploration poses no immediate internal threat to Wupatki National Monument. In Arizona, uranium deposits occur in both the Basin-and-Range province and the Colorado Plateau. Deposits in the Basin-and-Range are insignificant compared to those on the Colorado Plateau, where over 99% of the uranium has been produced. Uranium on the Colorado Plateau occurs mainly in either: (1) sandstones in the Upper Jurassic Morrison Formation and the Upper Triassic Chinle Formation, or (2) in solution-collapse breccia pipes formed in the Permian Redwall Limestone (Wenrich et al. 1989; Wenrich 2010).

Breccia pipes are vertical pipe-like columns created when overlying, angular, sedimentary rock fragments (breccia) collapse into a solution cavern formed in underlying massive limestone. Mineralizing fluids pass through the pipes and deposit a variety of metallic minerals, including uranium. Most of the known breccia pipes occur in northwestern Arizona. Many lie in the vicinity of Grand Canyon National Park. Fluids moving upward through the breccia pipes may deposit uranium in overlying sandstones (Wenrich et al. 1989)

The sandstone formations are neither exposed at the surface in Wupatki National Monument, nor in the subsurface beneath the monument (Billingsley et al. 2007A). The Redwall Limestone, however, was deposited across most of northern Arizona, including the area of Wupatki National Monument. In the Grand Canyon, the Redwall Limestone is approximately 150 to 240 m (500 to 800 ft) thick, but the unit thins to approximately 90 to 100 m (295 to 300 ft) thick in the subsurface near Cameron, Arizona, and is absent in the Defiance uplift area, east of the monument near the New Mexico border (McKee 1958; Beus 1990; Billingsley et al. 2007B). In the subsurface north of the monument, the top of the Redwall Limestone is estimated to be at a depth of 700 m (2,300 ft) beneath the Coconino Plateau, and 800 m (2,600 ft) in the Little Colorado River Valley, east of the

Black Point Monocline (figs. 10 and 20) (Billingsley et al. 2007B).

Because the Redwall Limestone may be present beneath Wupatki National Monument, the park may be within or immediately adjacent to northern Arizona's breccia pipe province. The highest-grade uranium ore bodies (over 0.5% U₃O₈) occur in these breccia pipes. Approximately 10% of breccia pipes yield economically viable mineral concentrations of uranium, copper, nickel, gold, or silver (Mike Conway, Arizona Geological Survey, Geologist, written communication, February 6, 2011).

In the Cameron mining district, located approximately 32 km (20 mi) north of Wupatki National Monument, uranium primarily occurs in the Petrified Forest Member of the Chinle Formation. The mining district lies on the southwest flank of the 8,500 sq km (3,300 sq mi) Black Mesa basin where erosion from the Little Colorado River has exposed a broad belt of Chinle Formation approximately 3 to 8 km (2 to 5 mi) wide by 30 km (18 mi) long (Bollin and Kerr 1958; Wenrich et al. 1989). The potential uranium deposit is separated from the monument by the Little Colorado River (Ulrich et al. 1984).

Future exploration may target the foot of Ward Terrace, which is located east of the main mining district. Open-pit uranium mining and processing requires water, and at Cameron, water would also be needed for dust control. The amount of water that would be required is unknown at this time.

No other discoveries of uranium in the Chinle Formation have been as large as those found in the Cameron mining district (Wenrich et al. 1989; Scarborough 1981). One reason the Cameron mining district may be unique is its location on the eastern edge of the breccia-pipe province. Uranium ore bodies may have resulted from fluids moving upward through the breccia pipes and into the Chinle Formation (Wenrich et al. 1989).

Petroleum Exploration

Petroleum exploration also poses no immediate internal threat to Wupatki National Monument. In order to accumulate economic quantities of hydrocarbons (oil and gas) in the subsurface, specific geologic conditions must be met. Organic-rich shale must be buried so that increased temperature and pressure matures the organic material and generates oil and gas. The oil and gas must then migrate out of the shale and into porous and permeable (reservoir) rocks. Migration must then be stopped (trapped) before the oil and gas reaches the surface. Hydrocarbon traps may consist of geologic structures, such as faults that juxtapose porous and permeable units against impermeable rock, or stratigraphic traps in which permeable layers pinch out into impermeable units such as shale.

In Arizona, these conditions may exist in seven basins, and on the northeastern flank of the Defiance Arch, an uplifted area that extends into northeastern Arizona

from west-central New Mexico (Butler 1995; Rauzi 2001). Northern Arizona contains four of the seven basins as well as the Defiance Arch (table 1). The Holbrook basin in east-central Arizona lies southeast of Wupatki National Monument.

Table 1. Northern Arizona basins and uplifted areas with hydrocarbon potential (Rauzi 2001).

Basin/Arch	Location
Paradox basin	Northeast Arizona
Black Mesa basin	Northeast Arizona
Holbrook basin	East-central Arizona
Chuar basin	North-central Arizona
Cordilleran shelf	Northwest Arizona
Defiance Arch	East-central Arizona

In Arizona, oil and natural gas production come primarily from the southwestern flank of the Paradox basin, in the extreme northeastern corner of the state approximately 240 km (150 mi) northeast of the monument (Nations et al. 1989; Rauzi 2010). Wupatki National Monument is not located within or on the flank of any of the potential hydrocarbon-producing basins. While Wupatki National Monument may contain the same formations in the subsurface that serve as source and reservoir rocks in the basins, the monument contains no identifiable hydrocarbon trap or evidence, such as oil seeps, that oil has migrated into or through the area. Future drilling activity in the basins or Defiance Arch area of northern Arizona should not affect Wupatki National Monument.

Seismic Activity (Earthquakes)

Most of Arizona's earthquakes occur in northern Arizona, associated with the transition zone between the Colorado Plateau and the Basin-and-Range province (fig. 11). Few of Arizona's recorded earthquakes register over a magnitude (M) 3.0 on the Richter scale. In February 1999, a magnitude 3.1 earthquake was located in Wupatki National Monument (Arizona Earthquake Information Center 2010). Since 1900, five earthquakes with magnitudes greater than 5 have shaken the Flagstaff area. These earthquakes occurred in 1906 (M6.2), 1910 (M6.0), 1912 (M6.2), 1959 (M5.0), and 1993 (M5.4) (Arizona Earthquake Information Center 2010).

Located on the edge of the Colorado Plateau, Wupatki National Monument lies within the northern Arizona active earthquake zone, and may experience low-magnitude earthquakes. For example, an unusual event took place on October 31, 2009, when over 100 earthquakes occurred about 24 km (15 mi) northeast of Flagstaff near Sunset Crater Volcano National Monument. Nicknamed the 'Halloween Swarm,' the earthquakes were triggered within the mid-crust at depths ranging from 17 to 27 km (11 to 17 mi). The largest earthquakes had magnitudes of 2.5, and would not have been felt by local residents (Arizona Earthquake Information Center 2009). Earthquakes of this frequency and depth are uncommon for this area, and research continues on the trigger responsible for the Halloween

Swarm (Dave Brumbaugh, Arizona Earthquake Information Center, Director, written communication, March 6, 2011).

While the Richter magnitude scale measures the seismic energy released by an earthquake, the Modified Mercalli intensity scale attempts to quantify the damage produced by an earthquake. The Modified Mercalli scale has 12 levels with shaking widely felt at level IV and significant damage beginning at level VII. Individuals will feel a level VI earthquake. Heavy furniture might be moved, and some chimneys may be damaged at level VI. At level VII, well-built buildings may experience minor damage, but poorly designed structures will sustain considerable damage. Richter magnitudes of 5.0-5.9 correspond roughly to Modified Mercalli Intensity levels of VI-VII. One level VI earthquake occurred in the Flagstaff area in 1892 (Arizona Earthquake Information Center 2010). Should a level VII earthquake impact the monument, damage may occur to the ruins.

Earthquakes often occur along pre-existing faults. The northeast orientation of the Doney Mountain Fault, however, removes this fault as a likely candidate for any significant movement resulting from an earthquake (Dave Brumbaugh, Arizona Earthquake Information Center, Director, written communication, March 6, 2011).

The National Seismic Network Station site, WUAZ, is located on a hill overlooking Wupatki Pueblo. The National Park Service maintains this site. Information and research on Arizona earthquakes is collected and distributed by the Arizona Earthquake Information Center, which is located in the geology building on the Northern Arizona University campus. Updated information is available on their website: <http://www4.nau.edu/geology/aeic/index.html> (accessed August 12, 2010). Information concerning earthquakes occurring around the globe may be found at the U. S. Geological Survey's Earthquake Hazards Program at <http://earthquake.usgs.gov> (accessed August 12, 2010).

Braile (2009) describes methods to monitor several parameters, or vital signs, associated with seismic activity. These vital signs include: monitoring earthquake activity; analysis and statistics of earthquake activity; analysis of historical and prehistoric earthquake activity; earthquake risk estimation; geodetic monitoring, ground deformation; and geomorphic and geologic indications of active tectonics. These parameters may provide additional monitoring information for resource managers.

Disturbed Land

Material removed for road construction and other purposes left twelve borrow pits in the monument (Greco et al. 2000). The sites range from 0.005 ha (0.012 ac) (site #3) to 2.1 ha (5.2 ac) (site #12). Damage to cultural sites, but not to any pueblo ruins, may occur from erosion at four of the twelve borrow pits that were inventoried in 2000. These four sites are located

primarily along access roads and are generally out of sight of the pueblos.

Most of the sites assessed in 2000 are recovering and do not require active management treatments. Because archeological resources are either exposed or at risk of eroding near quarries 2, 6, and 7, park management has requested funding for cultural resource stabilization work at these sites. Funding for minor remediation work at quarries 4 and 5, and for less intensive work than originally described for quarry 12, has also been requested. Funds have yet to be allocated for any of this work (Paul Whitefield, NPS North Central Arizona National Monuments, Natural Resource Specialist, written communication, April 5, 2011).

The site closest to any ruin is site #6, this 0.3 ha (0.7 ac) site lies approximately 610 m (2,000 ft) from an unnamed ruin (fig. 12). The site is off the mesa upon which the ruins rest, and is separated from the ruins by an ephemeral stream. Although archeological resources may be at risk from erosion, no pueblo ruins will be impacted by the minor erosion described in the inventory (Greco et al. 2000).

Erosion at the very small borrow pit site #3 may cause maintenance problems for the Hull's Canyon Road. Vegetation recovery is ranked as "good" at this site (Greco et al. 2000).

In 2000, the U.S. Forest Service was using a site, called Heiser Dump, to store rock material for a repaving project. The roughly 0.8 ha (2 ac) site was located adjacent to the "New Heiser" park administrative and operations area in the western part of the monument. Because the site was still being used, the Heiser Dump was not mapped or surveyed in 2000. The project was completed in 2005. The debris was hauled away, and the area was recontoured and scarified with a road grader. Further vegetation management will include the control of *Halogetom glomeratus* (salt lover) and re-seeding to re-establish native vegetation (Paul Whitefield, NPS North Central Arizona National Monuments, Natural Resource Specialist, written communication, April 5, 2011).

Detailed descriptions of each site, as well as recommended action, are available from the Geologic Resources Division (Greco et al. 2000).

Volcanic Eruptions

Sections of the San Francisco Volcanic Field remain active, so that sometime in the future, volcanic eruptions may again deposit volcanic ash over Wupatki National Monument. Over the last 780,000 years, volcanic activity has primarily occurred in locations adjacent to the monument: the eastern part of the field, in a group of volcanic cones called the "SP cluster", and a cluster of cones around Sunset Crater (figs. 4 and 18). Since about 2.5 million years ago, volcanism in the San Francisco Volcanic Field has migrated from west-to-east at a rate of about 2.9 cm (1.1 in) per year, the approximate rate and direction of the North American plate (Tanaka et al.

1986). However, exceptions to this trend exist on an individual volcano-by-volcano basis. For example, older volcanoes exist east of Sunset Crater, the youngest volcano in the San Francisco Volcano Field (Wolfe et al. 1987; Morgan et al. 2004). Volcanic eruptions may yet occur to the west and south of the monument.

The volcano that created Sunset Crater erupted about 1,000 years ago. The San Francisco Peaks volcanic system was active until about 90,000 years ago (Morgan et al. 2004). The SP cluster, located immediately west of the monument (fig. 4), consists of 67 basaltic cinder cones, tuff rings, spatter cones, and lava flows that formed within the last 1.7 million years (Ulrich and Bailey 1987; Conway et al. 1998). Based on the age and frequency of past events, scientists estimate that there is a 90% chance of an eruption in the SP cluster within the next 22,000 to 26,000 years, and a 13% chance that an eruption will occur within the next 1,000 years (Conway et al. 1998).

Most of the volcanoes in the San Francisco Volcanic Field are cinder cones composed of basalt; one example is Doney Mountain (fig. 13). Volcanic cinders (fig. 19), like pumice, contain abundant bubble-like cavities. Cinder cones are relatively small, usually less than 300 m (1,000 ft) tall, and form within months to years (Priest et al. 2001). They are also associated with basaltic lava flows. About two-thirds of the past events in the SP cluster resulted in lava flows (Conway et al. 1998). Lava flows extend from both SP Crater and Sunset Crater cinder cones (figs. 4, 14).

In contrast to the smaller cinder cones, a catastrophic eruption produced San Francisco Mountain, the only stratovolcano in the field, between 1.2 million and 400,000 years ago. Explosive volcanic eruptions that form a stratovolcano may cause a significant amount of destruction, as witnessed by the 1980 eruption of Mount St. Helens in the Pacific Northwest.

Predicting the next eruption and what type of impact it will have on Wupatki National Monument is difficult. A blanket of ash and larger volcanic rock fragments from the Sunset Crater eruption covered an area of more than 2,100 km² (810 mi²) (Luedke and Smith 1991). The distribution of volcanic cinders and lava fragments indicate that gas and ash were blasted high into the stratosphere while cinders, lapilli (pebble-size fragments), and lava bombs (material greater than 65 mm [2.5 in]) were ejected to altitudes of tens to hundreds of meters (Self et al. 2010).

According to the U.S. Geological Survey, future eruptions will probably occur in the eastern part of the field and will likely be small (Priest et al. 2001). Because of their size and the remoteness of the area, they should not pose a significant hazard to the monument. However, as Conway and others (1998) have discussed, the SP cluster remains active. In the SP cluster, magma may mix with groundwater to produce an explosive eruption of ash, tuff, and other volcanic clasts (Mike Conway, Arizona Geological Survey, Geologist, written communication, February 6, 2011). Although

unpredictable, volcanic eruptions remain a potential hazard to Wupatki National Monument (Mike Conway, Arizona Geological Survey, Geologist, written communication, February 6, 2011).

Global Climate Change

Water is a precious resource in Arizona. Since 1862, major statewide droughts have occurred from 1932 to 1936, 1942 to 1964, and 1973 to 1977, which was most severe in eastern Arizona (US Geological Survey 2004). The impact of future climate change on the state's groundwater and surface water remains uncertain. Climate change may alter seasonal precipitation patterns (e.g., rain versus snow), reduce snowpack, decrease spring runoff, and reduce the water available for stream flow and groundwater recharge (Environmental Protection Agency 2010; NPS Sonoran Desert Network 2010). Precipitation changes and warmer temperatures have unknown implications for vegetation ecosystems and animal habitats, which may subsequently impact water infiltration properties of soil.

In Arizona, groundwater provides the principal source for surface water bodies (NPS Sonoran Desert Network 2010). On a local level, resource managers may address reductions in groundwater storage and infiltration caused by drought and human development by implementing soil conservation and recharge enhancement projects. However, changes in precipitation and recharge due to climate change become more problematic. The National Park Service's Sonoran Desert Network and Arizona's Water Resources Development Commission continue to monitor climate change and Arizona's water resources.

Refer to Karl et al. (2009) for additional information regarding climate change impacts throughout the United States. The NPS Climate Change Response Program addresses science, adaptation, mitigation and communication for climate change issues throughout the National Park System (<http://www.nature.nps.gov/climatechange/index.cfm>, accessed June 10, 2011).

Potential Geologic Projects

The following topics were presented at the scoping meeting as potential projects applicable to Wupatki National Monument:


- An earthcrack inventory of the area.
- An evaluation of the blowholes with regard to potential safety hazards.
- An evaluation of the uranium and petroleum potential in Wupatki National Monument. Mineral rights belong to the Arizona land office.
- Mapping the gravel deposits, and evaluating their commercial value.
- A description of the provenance of the various clays and rocks that have been used in mortars over the years, and how these materials reflect the interrelationship between the cultural and geologic resources of the area.



Figure 8. An earthcrack near Lomaki Pueblo, Wupatki National Monument. The crack has formed in Permian Kaibab Formation. The person (for scale) stands on the contact between the relatively horizontal strata of the cliff forming Fossil Mountain Member (map unit Pkf) and the overlying, slope-forming Harrisburg Member (map unit Pkh) of the Kaibab Formation. The San Francisco Mountain can be seen in the distance. Photograph courtesy Dr. Sarah Hanson (Adrian College). Available online: http://www.adrian.edu/earthscience/SW_USspr08/SW_USSpring08.htm, accessed February 25, 2011



Figure 9. Blowhole near Wupatki Ruin. The blowhole was capped in 1965. Blowholes in the monument connect to an extensive underground fracture system. National Park Service photograph courtesy Tim Connors (NPS Geologic Resources Division).

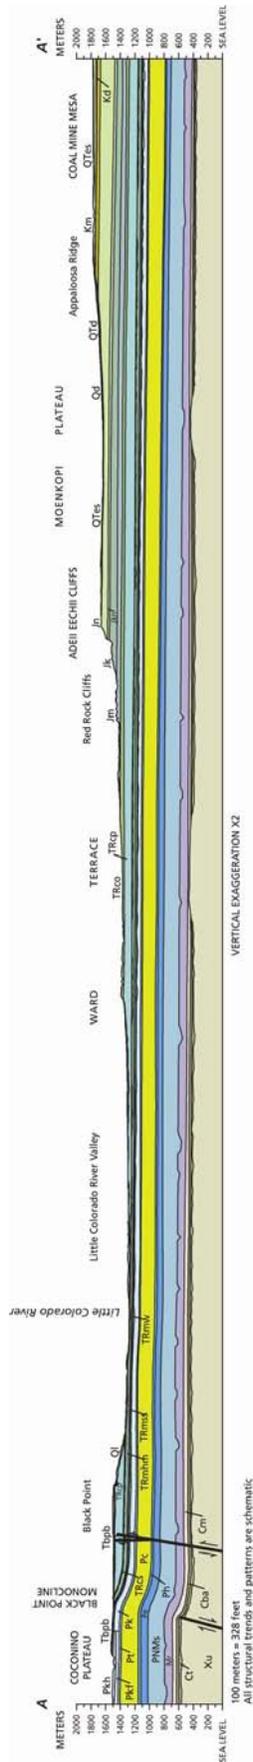

Legend	
Quaternary	Permian
Ql Landslide deposits	Kaibab Formation
Tertiary	Pkh Harrisburg Member
Tbpb Black Point Basalt	Pkf Fossil Mountain Member
Triassic	Pt Toroweap Formation
TRcp Petrified Forest Member	Pc Coconino Formation
TRcs Shinarump Member	Ph Hermit Shale
Moenkopi Formation	Pe Esplanade Sandstone
TRmhm Holbrook-Moqui Member	Pennsylvanian/Mississippian
TRmss Shnabkaib Member	PNMs Supai Group undivided
TRmw Wupatki Member	
	Mississippian
	Mr Redwall Limestone
	Cambrian
	Cm Mauv Limestone
	Cba Bright Angel Shale
	Ct Tapeats Sandstone
	Precambrian
	Xu Crystalline Rock

Figure 10. Southwest (A) to northeast (A') geologic cross-section showing the Redwall Limestone (unit Mr) in the subsurface. The cross-section is located north of the monument and is extracted from Billingsley and others (2007B). The Chinle Formation, although included in this cross-section, has been eroded from Wupatki National Monument. Breccia pipes and associated uranium deposits may be present in the Redwall Limestone. Note also how the strata fold over faults in the subsurface to form the Black Point Monocline. Cross section graphic extracted from Billingsley et al. (2007B). Available in the "wupa_geology.hlp" file in the included digital geology (GIS) data (Geologic Map Data section; Attachment 1).

Arizona Earthquakes and Faults

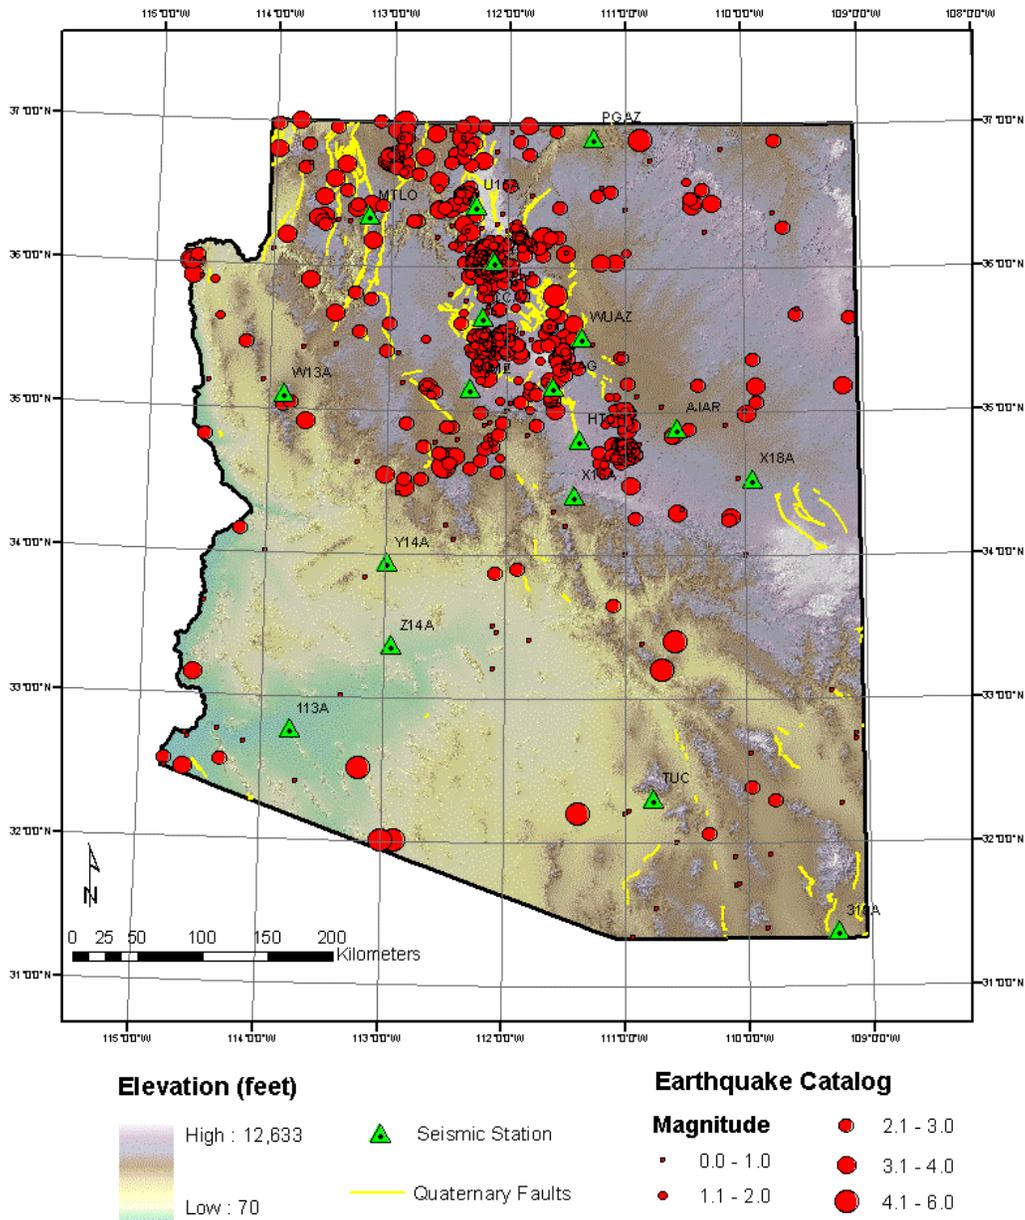


Figure 11. Arizona earthquakes (red circles) and Quaternary-age faults (yellow lines). Seismic station WUAZ is located on a hill overlooking the Wupatki Pueblo. Map courtesy of the Arizona Earthquake Information Center, http://www4.nau.edu/geology/aec/eq_fault_maps.html, accessed February 24, 2011.



Figure 12. Borrow pit site #6, Wupatki National Monument. Erosion has carved small gullies into the quarry banks and threatens cultural sites in this area. Funding for cultural resource stabilization work has been requested for this site. National Park Service photograph courtesy Deanna Greco (Grand Canyon National Park).



Figure 13. Doney Mountain is an extinct volcano with a rounded summit formed of red and black ash. One of over 600 volcanic features in the surrounding area, it offers vistas of the San Francisco Peaks to the west, the Painted Desert to the north, and the Little Colorado River valley to the east. A small plateau capped with Moenkopi Sandstone lies in the foreground. National Park Service photograph by Paul Whitefield (NPS North Central Arizona National Monuments).

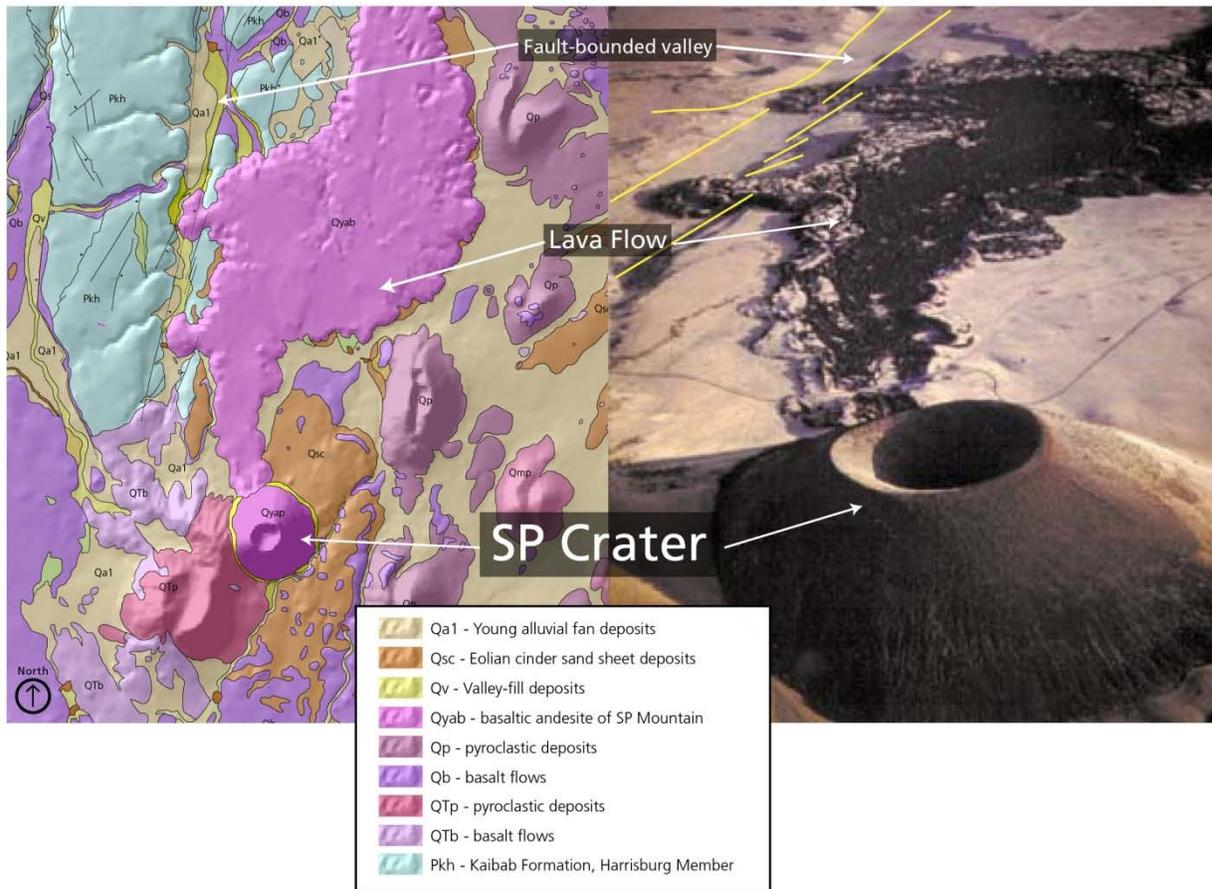


Figure 14. Geologic map and aerial view of SP Crater. This excellent example of a cinder cone lies approximately 5 km (3 mi) west of the monument's western boundary and 32 km (20 mi) north of Flagstaff in the San Francisco Volcanic Field. Associated with the cinder cone is a lava flow that extends approximately 6 km (4 mi) from the cone and is about 30 m (100 ft) thick. The cone and lava flows are mapped as geologic map unit Qyab, basaltic andesite of SP Mountain. Geologic map image extracted from GRI digital geologic data (GIS) by Philip Reiker (NPS Geologic Resources Division); see Geologic Map Data section and included GIS data. Aerial image is a U.S. Geological Survey photograph from Priest et al. (2001).

Geologic Features and Processes

This section describes the most prominent and distinctive geologic features and processes in Wupatki National Monument.

Geologic features at Wupatki National Monument represent a variety of past depositional environments, ranging from marine ecosystems to river systems. Processes involving tectonic deformation, uplift, and erosion have exposed these ancient environments to today's visitors.

The Sinagua Indians used sandstone of the Moenkopi Formation in Wupatki National Monument to build their multi-storied pueblos. Resting on bedrock, the uniform slabs of sandstone were reinforced with local clay-based mortar. The geologic features in the monument provide a window through which to view what the world was like millions of years ago. These features today have changed very little from when the Sinagua occupied the region.

Bedrock Features

Like much of the stratigraphy on the Colorado Plateau, the layers of rock in Wupatki National Monument are relatively horizontal. The oldest bedrock unit in the monument is the Permian Toroweap Formation. The Permian Kaibab Formation, common throughout northern Arizona, overlies the Toroweap Formation and forms the youngest Paleozoic formation in the monument (figs. 6, 15, and 16). Excellent exposures of older Paleozoic and Precambrian rock units may be found at Grand Canyon National Park, northwest of the monument.

Mesozoic rocks overlie Paleozoic strata. The Triassic Moenkopi Formation (fig. 17) is the youngest bedrock in the monument (Billingsley et al. 2007A). The Upper Triassic Chinle Formation overlies the Moenkopi Formation east of the Little Colorado River, but the formation has been eroded from Wupatki National Monument (McCormack 1989). The Moenkopi, less resistant to erosion than the Kaibab Formation, has been eroded from the uplands in the western part of the monument, and is restricted to structurally low areas.

Permian Toroweap Formation (map unit Pt)

Exposed at the bottom of Citadel Wash and Antelope Wash along the Doney Mountain Fault, the 15 to 21 m (50 to 70 ft) thick Toroweap Formation in Wupatki National Monument makes a dramatic departure from exposures in the Grand Canyon. In the Grand Canyon, the Toroweap is subdivided into three distinct members that represent tidal-flat, sabkha, and eolian depositional environments. However, in the monument area, the Toroweap cannot be subdivided into individual members (Turner 1990; Billingsley et al. 2007A). Exposed as a cliff of low-angle, calcareous, cross-bedded sandstone, the Toroweap at Wupatki has been

interpreted as coastal, eolian deposits similar to the sand dunes of the underlying Coconino Sandstone (labeled 'Pc' on the geologic cross-sections in Attachment 1).

Permian Kaibab Formation (map units Pkh and Pkf)

The Kaibab Formation forms the bedrock surface in the central part of the monument, as well as the Coconino Plateau. It is the youngest Paleozoic unit on the southern Colorado Plateau, and forms the caprock of the Grand Canyon (fig. 16). The Kaibab contains the Fossil Mountain Member (Pkf) and the younger Harrisburg Member (Pkh). In Wupatki National Monument, most of the surface exposures of the Kaibab Formation consist of the Harrisburg Member (Billingsley et al. 2007A).

Approximately 55 m (180 ft) of Fossil Mountain Member form the gray cliffs and ledges in the narrow canyons on Antelope Prairie, and along the Doney Mountain Fault (Billingsley et al. 2007A). The lithology of the unit changes from west-to-east, from sandy limestone to calcareous sandstone. This change results from a shift in Permian depositional environments from a more offshore environment to one that is more shoreward. Fossiliferous chert nodules and chert breccias, which may have formed from settling of suspended siliceous sponge spicules into topographic depressions, occur in the upper part of the member. Fossils in the chert nodules and sandy limestone include brachiopods, crinoids, trilobites, sponges, and bryozoans indicative of a subtidal, shallow-marine environment. Evaluation of the Fossil Mountain Member across the Coconino Plateau and in the Grand Canyon records an overall west-to-east transgressive episode of sedimentation during this time (McCormack 1989; Hopkins 1990). During a "transgression," sea level rises, and as the sea advances onto the continent, the coastline moves inland. In this case, sea level rose, and shoreline sedimentation migrated from west-to-east across northern Arizona.

The thin- to medium-bedded (0.3 to 2 m [1 to 6 ft]) Fossil Mountain Member gradually transforms to the thin-bedded Harrisburg Member (fig. 16). The contact between the two members is commonly placed at the topographic break where cliff-forming, cherty limestone changes to the slope- and ledge-forming gypsum, siltstone, sandstone, and sandy limestone of the Harrisburg Member (Billingsley et al. 2007A). In the top part of the unit, mollusks may be found in calcareous sandstone. The gastropods, pelecypods, scaphopods, and ostracods are able to tolerate a greater range of environmental conditions than the normal-marine organisms common to the Fossil Mountain Member.

In the monument, the Harrisburg Member is only about 25 to 37 m (80 to 120 ft) thick, but the unit thickens

westward to about 90 m (300ft) in northwestern Arizona and southern Nevada. For example, at Blue Diamond Hill, west of Las Vegas, the Harrisburg Member is so thick that gypsum is mined from the unit (Hopkins 1990). Gypsum, formed from evaporation of sea water, and the molluscan fauna found at Wupatki National Monument and throughout the Coconino Plateau, suggest that the Harrisburg Member represents a partially to highly restricted, shallow-marine environment that resulted from the westward regression of the shallow sea at the end of the Permian (see the Geologic History section).

Triassic Moenkopi Formation (map units TRmhm, TRmss, and TRmw)

The eastern half of Wupatki National Monument contains extensive exposures of red sandstone ledges and siltstone slopes of the Lower and perhaps Middle Triassic Moenkopi Formation (fig. 17). An easily recognizable regional unconformity (a break in the geologic record that represents an interruption in deposition) separates the red Moenkopi Formation from the underlying, gray-white Kaibab Formation (fig. 17). As much as 67 m (220 ft) of Moenkopi Formation once covered Wupatki National Monument, but erosion removed an unknown amount of Moenkopi Formation prior to deposition of the Upper Triassic Chinle Formation, which is exposed northeast of the monument (Billingsley et al. 2007A).

In contrast to the marine environments of the Permian, the members of the Triassic Moenkopi Formation in Wupatki National Monument contain geologic features indicative of terrestrial deposition. The Wupatki Member (TRmw), the oldest member of the Moenkopi Formation, displays ripple-marked mudstone, salt crystal casts, and raindrop impressions like those found in tidal flats today. Its red colored beds are typical of terrestrial sediments that develop a ferric (iron) oxide (hematite) coating on individual grains. Cross-bedded sandstones and calcareous siltstones in the overlying Shnabkaib Member (TRmss) represent continental lowland fluvial and tidal flat environments. Trough-crossbedding and ripple marks resulting from fluvial processes and fossil casts of reptile tracks characterize the reddish-brown claystone, siltstone, and sandstone layers in the Holbrook and Moqui Members (TRmhm).

The Lower Triassic Wupatki Member (TRmw) consists of sandstone ledges protruding from red to red-brown siltstone and mudstone slopes. Exposures range in thickness from 6 to 10 m (20 to 35 ft) and can be found from the Black Point Monocline to the southeast border of the monument, south of the Wukoki Ruin (Billingsley et al. 2007A). A massive yellow-white to light-brown cliff-forming sandstone layer at the base of the 15 m (50 ft) thick Shnabkaib Member marks the contact with the Wupatki Member. More resistant to erosion than the mudstones and siltstones of the Wupatki Member and the overlying Holbrook and Moqui Members, the Shnabkaib sandstone forms prominent mesas or ridges

shaped like antique flatirons along the Black Point Monocline (Billingsley et al. 2007A).

The Holbrook and Moqui Members, which are collectively mapped as one unit in the monument, may be partly Middle Triassic in age. The most prominent unit of the Moenkopi Formation in the monument, the Holbrook and Moqui Members, form 25 to 37 m (80 to 120 ft) thick exposures of slope-forming layers of claystone, siltstone, and sandstone. Beyond the monument's boundaries, abundant vertebrate fossils have been discovered in the Holbrook Member, and are listed below in the Paleontological Resources subheading (Tweet et al. 2009).

Volcanic Rocks of the San Francisco Volcanic Field

Volcanic rocks, ranging in composition from basalt (low silica content) to rhyolite (high silica content), form a myriad of volcanic landforms in the San Francisco Volcanic Field. In general, magma that is rich in silica is more viscous and its eruptions are more explosive than magma containing less silica. More than 500 individual vents spewed basaltic lavas throughout the volcanic field (Newhall et al. 1987). The SP cluster contains basaltic cinder cones, tuff rings, spatter cones, and basaltic lava flows (fig. 4). In contrast, large, long-lived eruptions of high-silica magma produced the domes of Mount Elden, Kendrick Peak, Sugarloaf Mountain, Bill Williams Mountain, and Sitgreaves Mountain (Moore and Wolfe 1976; Newhall et al. 1987; Wolfe et al. 1987; Holm 1988; Conway et al. 1998; Priest 2001).

The San Francisco Mountain complex, which can be seen from the monument (fig. 3), formed from countless eruptions of lava and pyroclastic material, through a central vent, over hundreds of thousands of years (Holm 1988). The 3,850 m (12,633 ft) summit of this stratovolcano was once at nearly 4,900 m (16,000 ft). Prior to the formation of the Sugarloaf volcanic dome about 100,000 years ago, the summit collapsed, forming a massive debris avalanche that filled the valley immediately west of Sunset Crater (Mike Conway, Arizona Geological Survey, Geologist, written communication, February 6, 2011).

Most of the more than 600 volcanoes in the San Francisco Volcanic Field, however, resulted from eruptions of low-viscosity, basaltic lava that formed cinder cones. Cinder cones form when gas-charged frothy blobs of basalt magma erupt as an upward spray, or lava fountain. The ejected lava blobs cool and fall back to the ground, accumulating as relatively symmetrical, cone-shaped hills of dark volcanic rock. Small fragments of basalt are called 'cinders' and larger fragments, 'bombs.' When the gas pressure has been sufficiently released from the magma, lava oozes from the vent to form a lava flow. (Priest et al. 2001). South of Wupatki National Monument, two impressive lava flows, the Bonito Lava Flow and the Kana-A Flow, are exposed in Sunset Crater Volcano National Monument and adjacent Coconino National Forest.

In the monument, basaltic lava flows form the majority of volcanic rocks of the San Francisco Volcanic Field. In 2006, Geologist-in-the-Park Sarah Hanson identified as many as eight distinct basalt lava flows in Wupatki National Monument (Hanson 2006; Hanson 2007). Hanson's detailed examination found that each of the flows had a unique geochemical signature. On the GIS map included with this report, volcanic rocks of the San Francisco Volcanic Field were mapped based on magnetic polarity, isotopic age, and field relations (Billingsley et al. 2007A). Table 2 correlates Hanson's flows with those on the enclosed map.

Table 2. Volcanic lava flows in Wupatki National Monument.

Hanson's Flows	Corresponding Map Unit
Western Section	
Black Point Flow	Tbpb: Black Point Basalt
Citadel Flow	
Gem City Flow	Qb: Basalt flows
Arrowhead Sink Flow	Qmb: Basalt flows
Red House Basin Flow	
	Qmlp: Lava Point Basalt
Central Section	
Doney Mountain Flows	Qmp: Pyroclastic deposits Qmb: Basalt flows Qmbi: Basalt dike
Woodhouse Mesa Flow	Qwb: Woodhouse Mesa basalt flows
Eastern Section	
Wukoki Flow	Qwb: Woodhouse Mesa basalt flows
Grand Falls Flow	Qmcb: Merriam Crater basalt flows

In western Wupatki, the Black Point and Citadel basalt flows (map unit Tbpb), the oldest flows in the park (about 2.43 million years old), contain similar minerals and geochemistry (Hanson 2007). They represent two separate lobes from the same lava flow that entered the area from the southwest (Ulrich and Bailey 1987; Billingsley et al. 2007A). The dark-gray to black basalt contains plagioclase phenocrysts (larger, easily recognizable crystals set within a finer-grained groundmass) as large as 1 cm (0.4 in) and averages 12 m (40 ft) thick.

The Black Point Basalt (Tbpb) is an excellent example of inverted topography. Originally, the basalt flowed down tributary drainages, to the Little Colorado River that had eroded into the Moenkopi Formation. Less resistant to erosion than the hard basalt, the Moenkopi eroded more quickly from the surrounding area. Once deposited in valleys, the hard Black Point Basalt now caps West Mesa, South Mesa, East Mesa, and North Mesa in the western part of Wupatki National Monument. Today, these mesas rise approximately 12 to 15 m (40 to 50 ft) above the surrounding Antelope Prairie, White Mesa, and the Citadel Ruins area (Billingsley et al. 2007A).

The Gem City basalt flows (Qb) that outcrop along present stream drainages in the southwestern part of

western Wupatki are some of the youngest flows in the monument. Their ages range from 770,000 to 220,000 years old (Ulrich and Bailey 1987; Billingsley et al. 2007A). Older basalt that forms the Arrowhead Sink and Red House Basin flows (Qmb) (1.38-0.83 million years old) is primarily exposed south of the monument, and shares similar southwest flow directions with the Black Point and Citadel basalt flows (Hanson 2007; Billingsley et al. 2007A).

South of the Visitor Center at Wupatki National Monument, Woodhouse Mesa basalt forms black cliffs rising above the red sediments of the Moenkopi Formation. The Woodhouse Mesa Flow (Qwb) and Wukoki Flow (Qwb) are geochemically distinct, but both are mapped as the (0.87-0.79 million year old) basalt flows of Woodhouse Mesa (Billingsley et al. 2007A). The basalt contains phenocrysts of olivine, clinopyroxene, and plagioclase. Field evidence indicates that the basalt flowed into the monument from the south.

Several flows combine to form the Doney Mountain Flow (Qmp, Qmb, Qmbi) in the south-central part of the monument. Doney Mountain is an elongated north-trending cinder cone that formed about 68,000 to 70,000 years ago, when a fissure eruption opened along the Doney Mountain Fault, which is within the boundaries of the monument. Two basalt flows erupted from Doney Mountain and flowed about 0.8 km (0.5 mi) downhill toward the current location of the Visitor Center. The principal unit in the Doney Mountain Flow consists of up to 92 m (300 ft) of dark-gray to red-brown pyroclastic deposits, (Qmp) that form 5 small cinder cones at the south-central border of the monument and 17 fissure vents that parallel the trend of the Doney Mountain Fault (Billingsley et al. 2007A).

The youngest basalt flow in Wupatki National Monument is the Grand Falls Flow (Qmcb) (Moore and Wolfe 1976; Hanson 2007; Billingsley et al. 2007A). About 19,000 years ago, lava flowed from Merriam Crater, located 17.5 km (11 mi) southeast of the map area, and formed a lava dam across the Little Colorado River canyon at the east edge of the monument. Stream flow diverted around the north side of the basalt flow, and then returned to its 60-m-(200-ft)-deep canyon, at what is now called Grand Falls (Moore and Wolfe 1976; Billingsley et al. 2007A). Currently, the Little Colorado River forms a small rapid called Black Falls as it flows over the Merriam Crater basalt.

Cinders and Sinagua Culture

Ground cover of black, gray, and red cinders occurs over large areas near Wukoki Ruin; on the slopes of Woodhouse Mesa, near Wupatki Ruin and the Visitor Center; and in western Wupatki National Monument on West Mesa, South Mesa, and East Mesa (Billingsley et al. 2007A). Southwesterly winds have shaped the deposits into dunes (Qdc) and sand sheets (Qsc).

Cinders and ash from the Sunset Crater eruption have long played a prominent role in the archaeology of the

Sinagua culture in Wupatki National Monument. In the early-to-mid 12th century (approximately 1130-1160 CE), several generations after the initial eruption, the Wupatki area experienced its greatest population increase (Noble 1991; Hooten et al. 2001). One reason for this population growth, proposed in 1932, could be that the water-retention capacity of the cinders allowed previously unfertile land to be farmed (Colton 1932; Hooten et al. 2001). It was thought that, for this to happen, the Sunset Crater eruption must have been responsible for the cinders at Wupatki National Monument. Comparison between the cinders at Wupatki National Monument and those known to have originated from the Sunset Crater eruption did not occur until 2001 (Hooten et al. 2001).

Hooten and others (2001) found two types of cinders in Wupatki National Monument. Each type came from a very different source. The most abundant type of cinder is a black, glassy cinder exposed over much of the southern end of the monument. The geochemical signature of this black cinder matches the geochemistry of cinders from Sunset Crater, thus proving that the cinders had been blown into the monument area approximately 1,000 years ago. The eruption deposited a minimum of 5 to 10 cm (2 to 4 in) of ash over the entire Wupatki National Monument area, a thickness ideal for a water-retaining mulch (Hooten et al. 2001).

The second variety of cinder is a red, oxidized tephra (pyroclastic material ejected by an explosive volcanic eruption) limited to the area around Doney Mountain. These cinders are geochemically distinct from the Sunset Crater material and represent an earlier phase of volcanic activity in the monument region (Hooten et al. 2001).

Surficial Features

Earthcracks and Sinks

Pleistocene (and perhaps even Holocene) east-to-west extensional (pull-apart) stress fractured the bedrock beneath Wupatki National Monument, and opened earthcracks along regional joint fractures. As mentioned in the Geologic Issues section, earthcracks may be 150 m (500 ft) deep (fig. 8). The cave mentioned at the scoping meeting in 2001 referred to one of these large, vertical earthcracks, which was entered by spelunkers (Paul Whitefield, NPS North Central Arizona National Monuments, Natural Resource Specialist, written communication, January 5, 2011).

In the western third of the monument, water percolating through fractured Kaibab Formation limestone (map unit Pkh) has dissolved some of the carbonate rock to form sinks and sinkholes. The most notable sink in the monument is the roughly circular Citadel Sink, that measures 152 m (500 ft) by 198 m (650 ft) (inside cover). Sinks also exist at Arrowhead Sink, along the southern border of the monument, and in the Red House Basin, located in the Coconino National Forest south of the monument (Billingsley et al. 2007A; U.S. Geological Survey Wupatki Southwest topographic quadrangle).

Blowholes

The Sinagua people, like today's visitors, probably were intrigued by the holes in the ground that blew air out and sucked air back in. They likely noticed that air coming from the holes was cool in summer and warm in winter. Archaeologists have noted that many blowholes are associated with habitation sites of prehistoric people. This association is probably not a coincidence (National Park Service 2007B).

The blowholes in Wupatki National Monument connect to underground fracture systems in the Kaibab Formation. The extent and design of these fracture systems, however, is not well known. The amount of air blowing in and out of the blowhole near Wupatki Pueblo suggests that a substantial amount of air space exists in the area's subsurface fracture system. Researchers estimate that the fracture system contains 200 million cu meters (7 billion cu ft) of air space, which is equivalent to a tunnel measuring 50 m (165 ft) wide, 50 m (165 ft) high, and 80 km (50 mi) long (National Park Service 2007B). Air exiting a blowhole may reach velocities of up to 56 km per hour (35 mi per hour) (Blyth 1995).

Air temperature and pressure drive the operation of the blowholes. Air travels from areas of high density to areas of lower density. Cool night and early morning air is denser than the warmer air in the blowhole system, so cool air rushes into the holes. The density difference diminishes as the outside air heats up during the day. Eventually the density of the outside air equals the density of the underground air, and air flow into the blowhole stops. If the outside air continues to warm, the cooler subsurface air begins to rush out of the blowhole (National Park Service 2007B).

Atmospheric pressure also affects the blowholes. Air flows from high pressure to low pressure, so if a low pressure system moves into the area, the pressure of the underground air will be higher and air will flow out of the blowhole (like air rushing from a tire when the tire valve is pushed). If a high pressure system moves into the area, the opposite will occur.

Whether air will be flowing into or out of a blowhole at any specific time is difficult to determine, due to the complex interactions between temperature and pressure. One of the more popular blowholes in the monument is found at the end of the Wupatki Pueblo interpretive trail (fig. 9).

Stream Terraces

Holocene and Pleistocene terrace deposits of three different ages (mapped as Qg1, Qg2, and Qg3) are exposed in Wupatki National Monument. Most terraces lie east of the Black Point Monocline and Doney Mountain Fault (the region known as the Wupatki Basin) (Billingsley et al. 2007A). The youngest terrace deposits (Qg1) in the Wupatki Basin lie along the north-to-northeast trending Doney Mountain Wash and

Deadman Wash. These arroyos contain ephemeral streams that drain to the Little Colorado River. Younger terrace deposits may be eroded by flash floods or sheet wash erosion.

The Qg1 terrace benches form 1 to 3.6 m (3 to 12 ft) above stream-channel (Qs) deposits, and 1.5 to 2 m (4 to 6 ft) above Little Colorado River channel and flood-plain (Qf) deposits (Billingsley et al. 2007A). Older terrace benches near the eastern border of the monument (Qg2 and Qg3) rise 4.5 to 12 m (15 to 40 ft) above modern streambeds, and about 43 m (140 ft) above the Little Colorado River (Billingsley et al. 2007A).

The terrace deposits contain similar lithology, primarily unconsolidated silt, sand, pebbles, cobbles, and some boulders from local Permian and Triassic formations, as well as rounded basalt clasts from the San Francisco Volcanic Field. The clasts are unconsolidated in Qg1 and Qg2, but clasts in Qg3 are partly cemented by calcite and gypsum cement.

Terrace and fluvial deposits have been used to reconstruct the landscape evolution of the Little Colorado River drainage basin in Wupatki National Monument (Blyth 1995). Intermediate and older terrace deposits (Qg2 and Qg3) correspond to once-continuous floodplain deposits that capped the Triassic Moenkopi Formation from the late Pliocene to late Pleistocene (see the Geologic History section). With uplift of the Colorado Plateau, the Little Colorado River eroded vertically through these floodplain deposits, forming a terraced landscape.

Springs and Seeps

Water is as precious a resource today in Arizona as it was when the Sinagua occupied Wupatki National Monument. In the eastern part of the monument, east of the Black Point Monocline, groundwater seeps from interbedded sandstones and shales of the Triassic Moenkopi Formation. At Wupatki Spring, near Wupatki Ruin, groundwater emerges from young alluvial fan deposits (Qa1) that overlie the Shnabkaib and Wupatki Members of the Moenkopi Formation (TRmss and TRmw) (Billingsley et al. 2007A). Heiser Spring, located in Heiser Wash in the southern part of the monument, discharges groundwater from the Wupatki Member as well. Discharge rates are low at Heiser Spring, ranging from 1.8 to 1.9 liters per minute (0.48 to 0.50 gallons per minute) (Blakemore 2003). Flow continues throughout the year, and collects in concrete spring boxes. Throughout their existence, the springs have been a welcomed resource for both humans and wildlife.

Recharge begins in the higher elevations to the west and southwest of the monument. Precipitation percolates through thin regolith and volcanic rocks of the San Francisco Volcanic Field, and through fractures in underlying Paleozoic strata (Blakemore 2003).

Geologic Structures

The northeast-to-southwest trending Black Point Monocline and associated Doney Mountain Fault, which parallels the monocline, form the principal geologic structures in Wupatki National Monument. Typical of the many monoclines on the Colorado Plateau, the Black Point Monocline extends for kilometers, beginning north of Gray Mountain and disappearing beneath basalt flows in the San Francisco Volcanic Field, south of the monument (Billingsley et al. 2007A; Billingsley et al. 2007B). The monocline forms a broad, 1.6 km-wide (1 mi) structure, in which relatively horizontal strata on the west limb of the monocline fold over the Doney Mountain Fault, tilting between 7° and 12°, before returning to relatively flat-lying beds in the Wupatki Basin, east of the monocline (figs. 4, 13, and 20) (Huntoon 2003; Billingsley et al. 2007A; Billingsley et al. 2007B).

Fault movement on the Doney Mountain Fault has uplifted the older Permian limestone relative to the younger Triassic sandstones and shales. The prominent Doney Cliffs separate the uplifted Kaibab Formation from the Triassic Moenkopi Formation in Wupatki National Monument. (Billingsley et al. 2007A).

The Doney Mountain Fault began as a reverse fault (fig. 21) caused by the collision between the North American plate and the tectonic plate to the west, called the Kula plate, approximately 80 to 75 million years ago. The compressive energy from the collision reactivated much older, high-angle Precambrian faults that resulted in reverse faults like the Doney Mountain Fault, as well as the great monoclinial folds on the Colorado Plateau. This same collision also produced the Rocky Mountains.

In late Pliocene time, less than 3 million years ago, the crust was pulled apart in the Wupatki National Monument area. This extensional stress caused normal fault movement (fig. 21) along the same ancient fault planes that had been reactivated during the collision that caused the reverse faulting 80 to 75 million years ago. Normal fault movement along the Doney Mountain Fault dragged down the strata along the Black Point Monocline, accentuating the dip of the rock layers (Billingsley et al. 2007A).

In addition to the prominent Black Point Monocline and Doney Mountain Fault, Wupatki National Monument contains northwest- and north-trending normal faults and structural basins, called grabens, that developed due to east-west extensional stress since the Pleistocene (2.6 to 0.01 million years ago) (Billingsley et al. 2007A). The majority of these younger, normal faults within Wupatki National Monument trend to the northwest and may be relatively young. For example, these faults vertically offset some basalt flows that are approximately 510,000 years old. The association of these faults in the Citadel Wash area suggests that graben development began less than 500,000 years ago (Billingsley et al. 2007A). Extension has also contributed to the relatively recent earthcracks in the monument.

Recent extension along the edge of the Colorado Plateau may also be responsible for the apparent horizontal offsets along the Doney Mountain Fault, and the change of direction of the Black Point Monocline. In the northern part of the monument, the Black Point Monocline turns abruptly to the southwest, along short, staggered, northwest-trending, normal faults (see Digital Geologic Data Overview). From Doney Mountain to north of Antelope Wash, the Doney Mountain Fault is also offset by northwest-trending faults (Billingsley et al. 2007A).

In summary, the structures in Wupatki National Monument reflect processes primarily at work during three tectonic episodes during Earth's history. First, compression about 80 to 75 million years ago caused reverse faulting (Doney Mountain Fault) and the development of the Black Point Monocline. Approximately 3 million years ago, crustal extension reversed the movement on the Doney Mountain Fault. Most recently, continued east-west extension has generated northwest-trending normal faults, earthcracks, and sinks in the monument.

Paleontological Resources

Throughout the Colorado Plateau, fossils can be found in the Permian Kaibab and Toroweap Formations, and in the Triassic Moenkopi Formation. Limestones in the Paleozoic formations contain mostly marine invertebrate remains. The primary fossils in the Moenkopi Formation outside of the monument include vertebrate body fossils and trace fossils (trails, tracks, and burrows of organisms) of fish, amphibians, and reptiles (Tweet et al. 2009).

No fossils have been documented from the limited exposures of the Toroweap Formation in Wupatki National Monument. In Wupatki, the Toroweap consists of a single cliff-forming sandstone, but in Grand Canyon National Park, the Toroweap includes three members. One of these members, the Brady Canyon Member, contains open-marine invertebrate fossils in its limestone beds, including brachiopods, bryozoans, crinoids, and horn corals (Turner 1990).

The Kaibab Formation contains an abundant array of fossils of marine organisms, including foraminifera, sponges, corals, bryozoans, brachiopods, bivalves, cephalopods, gastropods, scaphopods, trilobites, ostracods, crinoids, conodonts, algae, and trace fossils (Hopkins 1990). The formation also contains chondrichthyan (cartilaginous fish) teeth, spines, dermal denticles, and ray-finned fish teeth and tooth plates (Hunt et al. 2005; Tweet et al. 2009).

In the Wupatki National Monument area, a few brachiopods, trilobites, and crinoids have been collected from sandy limestone in the Fossil Mountain Member of the Kaibab Formation, and sponges and bryozoans have been collected from chert nodules and beds. Outside of the boundaries of the monument, fossils common to the

Fossil Mountain Member include sponges, rugose corals, bryozoans, brachiopods, bivalves, trilobites, crinoids, echinoids, and shark teeth.

Calcareous sandstone in the top part of the Harrisburg Member contains scattered mollusk fossils (Billingsley et al. 2007A). Gastropods and scaphopods are the most common fossils found in the region, but the unit also contains bryozoans, brachiopods, bivalves, cephalopods, trilobites, crinoids, conodonts, and shark teeth. In Wupatki National Monument, a gastropod (genus *Bellerophon*) and an unidentified mollusk have been collected and catalogued from the Kaibab Formation. These now reside in the Walnut Canyon National Monument collections (Tweet et al. 2009).

The Museum of Northern Arizona in Flagstaff houses the Moenkopi Formation fossils collected from Wupatki National Monument. The specimens include vertebrate trace fossils, an ammonite fragment, and fragments of preserved plants. *Chirotherium* ("hand beast") tracks, named because the foot print resembles a human hand, have been found within the monument (McCormack 1989; Tweet et al. 2009). Chirotheriid tracks in the Wupatki Member of the Moenkopi consist of four toes, three in front and one to the rear, that are 1 to 3 cm (0.4 to 1.2 in) long (McCormack 1989). Paleontologists believe these trackways may represent an archosaur, an early predatory ancestor of the dinosaurs. In recent years, geosciences interns in the GeoCorps America program have also discovered amphibian swimming tracks, an archosauromorph-like trackway, and tetrapod tracks within the monument (Tweet et al. 2009). The group of archosauromorphs includes crocodylians, dinosaurs, and birds.

Although Cenozoic fossils have not been found in bedrock units in Wupatki National Monument, Cenozoic rocks and sediments within approximately 100 km (60 mi) of the monument have yielded isolated bones of large mammals, including sloths, proboscideans (elephants), equids (horses), bison, and camelids (Tweet et al. 2009). Mammoth remains have been reported from the Wupatki National Monument vicinity (Agenbroad and Mead 1989). In addition, pollen and plant material discovered from as many as 22 packrat middens in the monument have helped to reconstruct the late Pleistocene and Holocene ecology and climate of the southwestern United States (Tweet et al. 2009).

Known for its archaeology, Wupatki National Monument also contains fossils among its cultural resources. Petrified wood and chert were used by prehistoric people to make tools and weapons. Parrot bones and shell jewelry have been found among the Wupatki ruins (Tweet et al. 2009). The Western Archeological and Conservation Center collections contain a number of artifacts constructed from fossils or petrified wood, such as a chert or fossil sponge projectile point, a petrified wood fragment from Wupatki Ruin that was used as a bead, and petrified wood projectile points from Nalakihi and Citadel Ruins (Tweet et al. 2009).

A detailed summary of the fossils collected from Wupatki National Monument and the surrounding area may be found in Tweet et al. (2009) (an internal NPS document).

The 2009 Paleontological Resources Preservation Act directs the National Park Service to manage and protect paleontological resources using science-based principles and expertise. It also calls for inventory, monitoring, and scientific and educational use of fossil resources.

Protection of associated location information is also required, as fossils are non-renewable resources. The National Park Service and other federal land management agencies are currently (June 2011) developing joint regulations associated with the Act.

Santucci et al. (2009) outlines potential threats to in situ paleontological resources and suggested monitoring “vital signs” to qualitatively and quantitatively assess the potential impacts of these threats. Paleontological vital signs include: erosion (geologic factors); erosion (climatic factors); catastrophic geohazards; hydrology/bathymetry; and human access/public use. Santucci et al. (2009) also presents detailed methodologies for monitoring each vital sign.

Cultural Connections to Geology

The geology of Wupatki National Monument and vicinity helped the Sinagua carve a life out of the desert of the southern Colorado Plateau. With exposure to

surface conditions, the Moenkopi Formation fractured and broke along flat edges, making excellent building blocks for Sinagua pueblos (figs. 17, 22). Erosion and weathering of Moenkopi Formation rocks produced clay, which was used as mortar to hold the pueblo walls together. Chert from river gravel deposits was used for arrow heads and cutting tools (fig. 7). Volcanic ash and cinders provided valuable, moisture-retaining mulch for crops (fig. 19).

The natural springs in the monument provided water to the early inhabitants and wildlife. About 800 years ago, Ancestral Puebloan peoples even built catchment basins below the springs.

Blowholes may have also been important to early inhabitants of the region. Wupatki Pueblo was built near a blowhole, as were many large pueblo sites in northern Arizona (National Park Service 2007B). The Hopi considered these openings to be the source of the wind and home of the wind god, Yaponcha. Prehistoric people may have built their homes near blowholes for spiritual reasons. They may also have used blowholes to predict the weather. For example, when atmospheric pressure is low, air blows out of the blowholes and there is a chance of rain. The Sinagua may have also appreciated the cool air from the blowholes in the summer and the warm air in the winter (National Park Service 2007B).



Figure 15. Contact between the Toroweap and Kaibab Formations. Notice the typical cross bedding (angled layers) in the Toroweap. National Park Service photograph by Paul Whitefield (NPS North Central Arizona National Monuments).



Figure 16. Exposure of the Kaibab Formation. The relatively horizontal strata forming the cliffs are the Fossil Mountain Member of the Kaibab Formation (map unit Pkf) and the beveled slope is the Harrisburg Member (map unit Pkh). The view is towards the west at Cathedral Canyon near the Doney Mountain Fault. U.S. Geological Survey photograph by G.H. Billingsley in 2004; extracted from from Billingsley et al. (2007A).



Figure 17. The Triassic Moenkopi Formation in Wupatki National Monument forms distinctive reddish slopes commonly covered by eroded slabs of red sandstone. Moenkopi sandstone was used by Sinagua Indians to build their pueblos and other structures. The Permian Kaibab Formation underlies the Moenkopi, while cinders (black) fill valley floors and depressions. The contact between the Moenkopi and the Kaibab is an unconformity (white line). National Park Service photograph by Paul Whitefield (NPS North Central Arizona National Monuments).

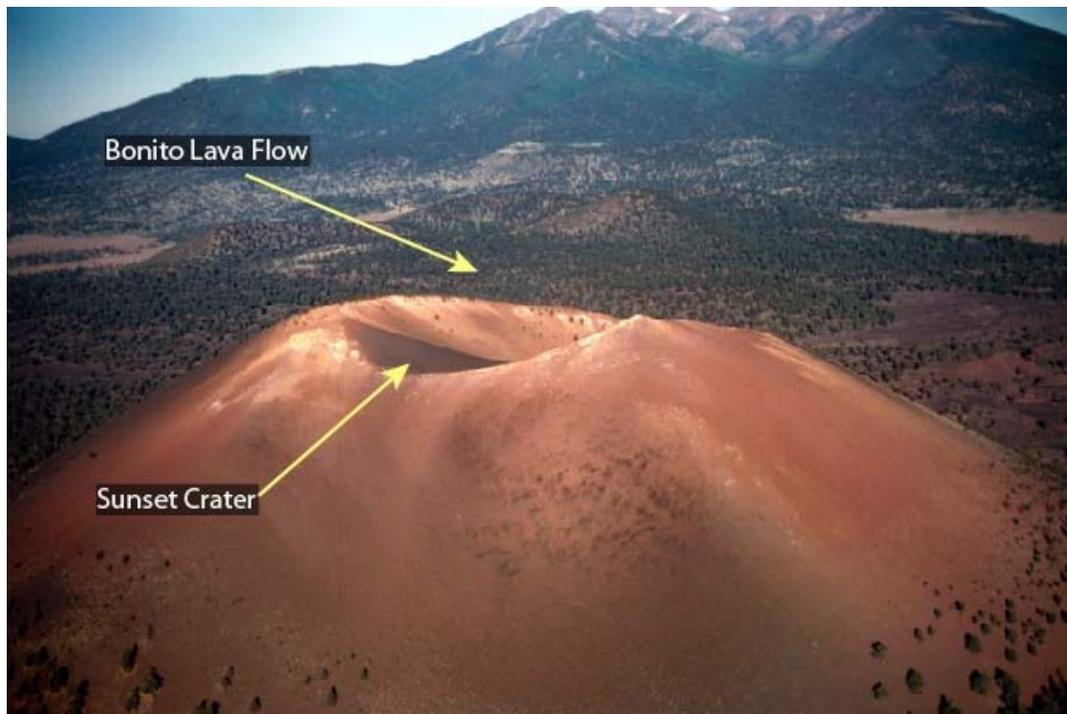


Figure 18. Aerial view of Sunset Crater cinder cone in Sunset Crater Volcano National Monument, viewed from the east. Sunset Crater stands 340 m (1,100 ft) tall. Its crater measures 122 m (400 ft) deep and 686 m (2,250 ft) from rim to rim. The dark landscape beyond the crater is part of the Bonito Lava Flow. U.S. Geological Survey photograph by Edwin McKee, available at <http://libraryphoto.cr.usgs.gov/html/lib/batch57/batch57j/batch57z/med00711.jpg>, accessed December 22, 2010.



Figure 19. Eolian cinder dune (Qdc) in Wupatki National Monument, displaying wind ripples. The black cinders may act as a moisture-holding mulch for crops, possibly influencing people to move to the Wupatki area around CE 1100. National Park Service photograph by Paul Whitefield (NPS North Central Arizona National Monuments).

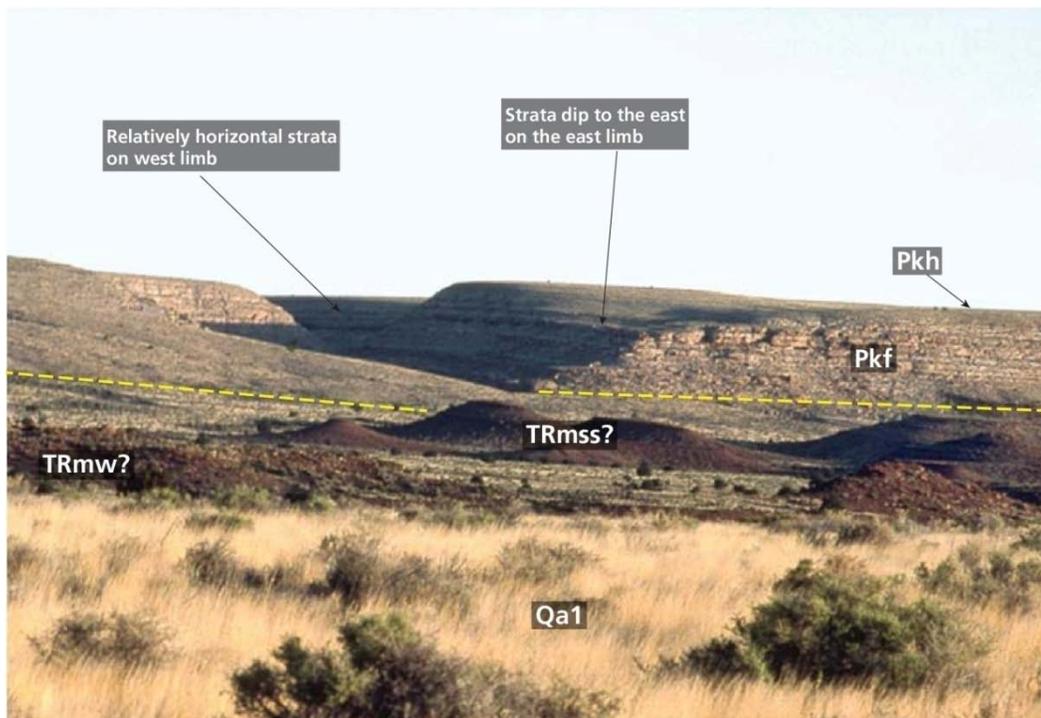


Figure 20. A view of Black Point Monocline and Doney Mountain Fault, looking west at Antelope Wash, which has carved a canyon through the monocline. Strata on the west limb of the monocline are relatively horizontal while the strata on the east limb tilt to the east. The dashed yellow lines approximate the surface trace of the Doney Mountain Fault that offsets the monocline. The Harrisburg Member of the Kaibab Formation (Pkh) caps the monocline. The steep cliffs are composed of the Fossil Mountain Member of the Kaibab Formation (Pkf). The dark hills in the center of the photograph may be composed of the Shnabkaib Member of the Triassic Moenkopi Formation (TRms?) that overlies the Wupatki Member of the Moenkopi Formation (map unit TRmw). Grasses and sagebrush grow on alluvial fan deposits (Qa1) in the foreground. National Park Service photograph extracted from Billingsley and others (2007A).

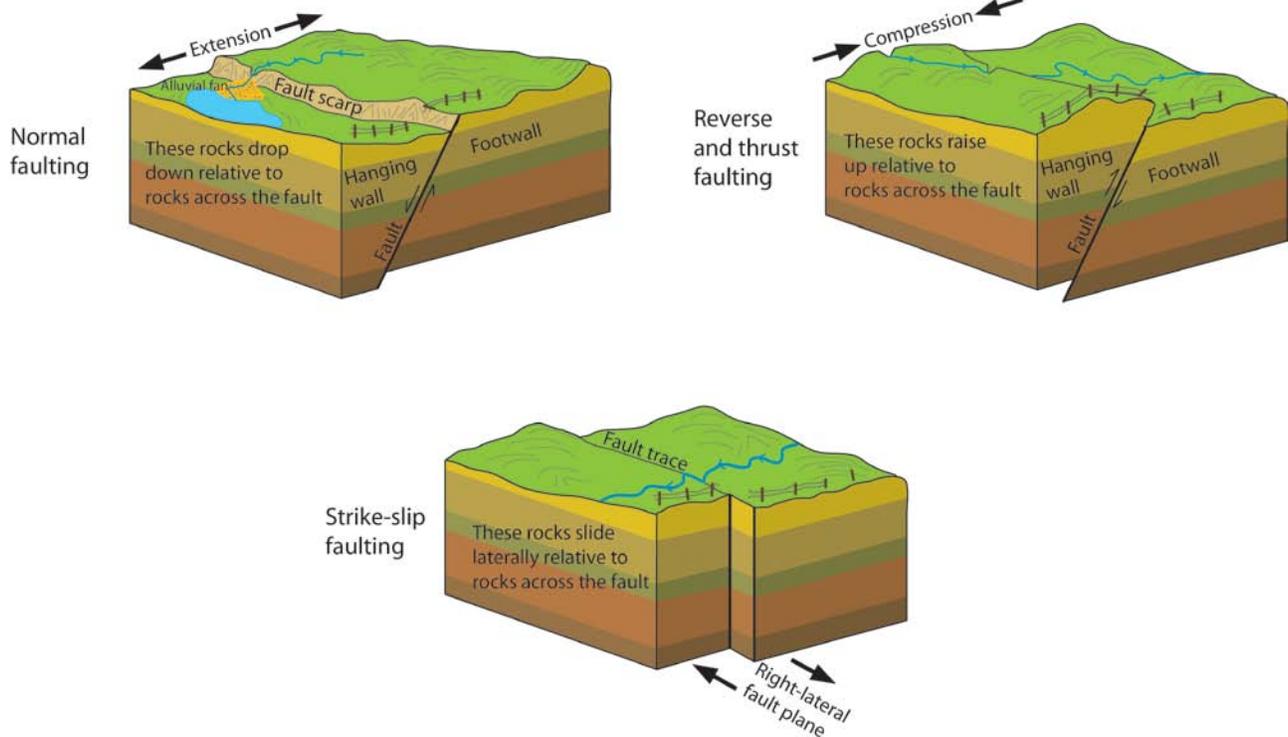


Figure 21. Schematic graphics illustrating different fault types. As a way of orientation, if you walked down a fault plane, your feet would be on the "footwall," and the rocks over your head would form the "hanging wall." In a normal fault the hanging wall moves down relative to the footwall. Normal faults result from extension (pulling apart) of the crust. In a reverse fault the hanging wall moves up relative to the foot wall. A thrust fault is similar to a reverse fault only the dip angle of a thrust fault is less than 45°. Reverse faults occur when the crust is compressed. In a strike-slip fault, the relative direction of movement of the opposing plate is lateral. If the movement across the fault is to the right, it is a right-lateral (dextral) fault, as illustrated above. If movement is to the left, it is a left-lateral (sinistral) fault. A strike-slip fault between two plate boundaries is called a transform fault. Graphic by Trista Thornberry-Ehrlich (Colorado State University).



Figure 22. Pueblos in Wupatki National Monument were often constructed around rock outcrops, taking advantage of the natural heating and cooling effects of the rocks. In Wupatki Pueblo, the Moenkopi Formation is also used for building blocks. National Park Service photograph by Paul Whitefield (NPS North Central Arizona National Monuments).

Geologic History

This section describes the rocks and unconsolidated deposits that appear on the digital geologic map of Wupatki National Monument, the environment in which those units were deposited, and the timing of geologic events that created the present landscape.

The geologic features and processes at Wupatki National Monument record a geologic history that spans approximately 300 million years. Permian rocks (figs. 6 and 23) are the oldest rocks exposed in Wupatki National Monument. However, the 1,840 million year old Elves Chasm pluton, the oldest rock unit known in the southwestern United States, is exposed in Grand Canyon National Park to the north. Prior to 1,400 million years ago, during the Precambrian, the southwestern continental margin of proto-North America may have looked like today's western Pacific, with numerous offshore volcanic islands, and oceanic crust being subducted beneath the Asian continent (Hoffman 1989; Pallister et al. 1997). Precambrian subduction compressed the ocean basin sediments and attached them to the proto-North American continent (Conway and Silver 1989; Hoffman 1989). By 1,400 million years ago, most of present-day Arizona had been added to the proto-North American continent (fig. 24).

Cambrian rocks in Arizona record a major advance of the sea into the area about 520 million years ago, at the initiation of the Paleozoic era (fig. 25). Throughout the Paleozoic, epicontinental seas advanced (transgressed) and retreated (regressed) across Arizona, depositing sediment on the sea floor that would eventually lithify into thick layers of limestone and sandstone.

Permian Period (299-251 million years ago)

As the Paleozoic era came to a close, subduction of the oceanic plate beneath the proto-North American continent caused west-to-east directed thrust faulting that added continental shelf and slope rocks to the western margin. The South American tectonic plate collided with the proto-North American plate and closed the proto-Gulf of Mexico ("proto" refers to a landmass or ocean that existed prior to the current feature). The collision caused the uplift of the northwest-southeast-trending Ancestral Rocky Mountains in Colorado, the northeast-southwest-trending Sedona Arch in central Arizona, and the Mogollon Rim, an uplift in east-central Arizona. South and west of the Mogollon Rim, an offshore continental shelf became an ideal environment for carbonate production in Arizona (Blakey 1980; Peterson 1980).

About 275 million years ago, the western margin of Pangaea, the supercontinent that formed as the globe's landmasses sutured together, was oriented along the equator (Biek et al. 2000; Morris et al. 2000). A dry, high pressure climatic belt prevailed in this western part of Pangaea, and resulted in restricted marine, evaporitic

conditions over much of the continental shelf and coastal areas (Peterson 1980).

The high-angle, sweeping sets of cross-beds in the early Permian (Cisuralian) Coconino Sandstone record the southerly advance of an eolian sand sea (erg) composed of exceptionally large sand dunes (Middleton et al. 1990). The Coconino Sandstone is exposed on the Colorado Plateau, but is not exposed in the monument (Billingsley et al. 2007A). An island arc system lay to the west, where the margin of proto-North America continued to be compressed against the subducting oceanic plate. Northeast of Wupatki National Monument, the dune sand mingled with coarser sediment eroding from the Ancestral Rocky Mountains (Peterson, 1980).

The Permian Toroweap (Pt) and Kaibab Formations (Pkh and Pkf) represent an overall transgressive episode in which the sea advanced from the west to drown the dune field of the Coconino Sandstone. Wave erosion from the advancing sea beveled the Coconino sand dunes and redistributed the sand into the flat-bedded or low-angle cross-bedded sandstone of the Toroweap Formation (fig. 15) at Wupatki National Monument (Turner 1990; Billingsley et al. 2007).

The regionally extensive Kaibab Formation contains a myriad of rock types and fossils that attest to the ancient seaway (called the Kaibab Sea) that covered most of Arizona in the Permian (fig. 26). The west-to-east transition of fossiliferous limestone to dolomitic mudstone and sandstone in the Fossil Mountain Member represents an overall transgressive phase of deposition (Cheevers and Rawson 1979; Cheevers 1980; McCormack 1989; Hopkins 1990). At Wupatki National Monument, the open-marine fauna, sandy limestone, and minor amounts of dolomite represent subtidal, shallow-marine environments (Hopkins 1990).

The overlying Harrisburg Member of the Kaibab Formation (Pkh) records the westward regression, or retreat, of the Kaibab Sea. Massive gypsum deposits in the unit, especially in western Arizona and southern Nevada, formed in hypersaline basins or lagoons bordered by coastal mudflat and sabkha environments (Hopkins 1990). In the Wupatki area, molluscan fauna, gypsum, and sandy limestone represent restricted, shallow-marine environments that developed as the sea retreated westward.

The boundary between the Permian and Triassic periods (and Paleozoic and Mesozoic eras) is marked by the most severe mass extinction event in the last 542 million years.

Up to 96% of marine species, including some of those found in the Permian bedrock of Wupatki National Monument, and 70% of terrestrial vertebrates, may have perished (Raup 1991). The only known mass extinction of insects occurred at this time. The loss of biodiversity is recorded in the extinction of 57% of all families and 83% of all genera. Thousands of species of insects, reptiles, and amphibians died on land while in the oceans, rugose corals and the once prolific trilobites vanished, as did many species of snails, urchins, sea lilies (crinoids), and some fish. Five million years later, at the dawn of the Mesozoic Era, the oceans' chemistry began evolving into the chemistry of modern oceans, and on land, the first mammals and dinosaurs evolved.

Triassic Period (251-200 million years ago)

From the middle of the Paleozoic through the Mesozoic, the western margin of North America was an active plate margin where dense, oceanic crust subducted beneath lighter continental crust. At an active plate tectonic margin, pressure and heat from convergence melts some of the asthenosphere and generates magma above the downgoing (subducting) plate. Magma rises to form plutons and active volcanoes, such as those found in today's Cascade Range. During the Mesozoic, an arcuate-shaped 'magmatic arc' (also called a 'volcanic arc') formed along the western margin of North America (figs. 27, 28) (Oldow et al. 1989; Christiansen et al. 1994; Dubiel 1994; Lawton 1994; Peterson 1994). Some of the magma erupted onto the surface, while some of the magma solidified beneath the surface to form the plutons and batholiths of the Sierra Nevada, some of which are exposed in Yosemite National Park.

During the Triassic, the supercontinent Pangaea reached its greatest areal extent. All the continents had converged to form a single landmass that was located symmetrically about the equator (Dubiel 1994). As the Kaibab Sea withdrew, fluvial, mudflat, sabkha, and shallow marine environments of the Moenkopi Formation developed in what is now the Great Basin region of the United States (fig. 27) (Stewart et al. 1972; Christiansen et al. 1994; Morales 2003). The fossilized plants and animals in the Moenkopi are evidence of a climate shift to a warm tropical setting that may have experienced monsoonal, wet-dry conditions (Stewart et al. 1972; Dubiel 1994).

In the Wupatki National Monument area, reddish mudstones interbedded with sandstones and sedimentary structures, such as small-scale ripple marks, salt crystal casts, and rain drop impressions in the Wupatki Member (TRmw), suggest deposition in near-shore, shallow marine and tidal flat environments. The cross-bedding, scour marks, and channel-fill features in the massive sandstone in the overlying Shnabkaib Member have been interpreted as eolian deposits interbedded with ephemeral stream systems (McCormack, 1989; Billingsley et al. 2007A). Features such as cusp-shaped ripple marks, trough-shaped cross-bedding, which formed when sand filled in stream channels, as well as tracks of reptiles, confirm continued

fluvial deposition in the Holbrook and Moqui Members (TRmhm) (Blakey 1988; Billingsley et al. 2007A). A regional unconformity separates the Moenkopi Formation from the Upper Triassic Chinle Formation (TRcp and TRcs). Terrestrial plants (such as those preserved in Petrified Forest National Park), fresh water invertebrate fossils, and lake sediments attest to continued terrestrial deposition during Chinle time.

Jurassic Period (200-145 million years ago)

Any rocks deposited during the Jurassic and Cretaceous periods have been eroded from the Wupatki National Monument landscape. In the Jurassic, the Farallon Plate and the North American Plate converged at an oblique angle to one another, and created a northwest-trending volcanic island arc along the southwestern margin of North America, southwest of today's Colorado Plateau and Mogollon Rim in Arizona (fig. 28) (Tosdal et al. 1989). Locally, crustal extension occurred within the volcanic arc. Quartz-rich eolian sand blew into the region from extensive dune fields located on the southern Colorado Plateau (Bilodeau et al. 1987; Tosdal et al. 1989). Voluminous pyroclastic rocks and volcanic flows erupted across most of the Sonoran Desert region of Arizona during the Early Jurassic. For approximately 35 million years, into the Middle and perhaps early Late Jurassic period, explosive volcanism continued to dramatically modify the southern Arizona landscape.

In the Middle Jurassic (175-161 million years ago), Wrangellia, a collection of islands in the Pacific, collided with North America, initiating volcanic activity along the west coast, from Mexico to Canada (fig. 28). The collision resulted in west-to-east directed thrust faulting that formed mountains in Nevada. A shallow sea encroached into Utah from the north. About 165 million years ago, catastrophic volcanic eruptions occurred in southeastern Arizona, producing bowl-shaped depressions called calderas. Calderas form when overlying rocks collapse into an emptied magma chamber. Calderas in the southern Huachuca and Dragoon Mountains record this violent volcanic activity. Coronado National Memorial in southeastern Arizona, for example, lies within the Montezuma caldera, estimated to be 16 to 18 km (10 to 11 mi) in diameter (Lipman and Hagstrum 1992).

By mid-Late Jurassic time, approximately 150 million years ago, strike-slip faulting (fig. 21) related to the opening of the Gulf of Mexico generated large-scale, high-angle, northwest-trending faults in southern Arizona (Tosdal et al. 1989). A large strike-slip fault zone, called the Mojave-Sonora megashear, truncated the southwestern continental margin of North America. Regional extension stretched the crust of southeastern Arizona, opening a series of pull-apart basins (Kluth 1983; Elder and Kirkland 1994; Anderson and Nourse 2005; Anderson and Silver 2005; Stevens et al. 2005). The northwest-southeast trending megashear accommodated approximately 800 to 1,000 km (500 to 600 mi) of displacement (Anderson and Silver 2005; Haenggi and Muehlberger 2005).

At the end of the Jurassic, volcanism waned and finally ended. Rift (pull-apart) tectonics formed the Bisbee trough that extended into southeastern Arizona from the Gulf of Mexico.

Cretaceous Period (145-65 million years ago)

During the Early Cretaceous in southern Arizona, rifting along the northwest-southeast-trending Bisbee basin dominated the tectonic regime. Rather than accreting land to the continent, tectonic forces were pulling the land apart. Rifting tilted the Mogollon slope towards the northeast.

Approximately 90 million years ago, in the Late Cretaceous, renewed oceanic-continental plate convergence along the western margin of North America caused sedimentary strata to be folded and thrust eastward over Precambrian basement rocks in a mountain-building episode called the Sevier Orogeny. Rising mountains in the developing fold-and-thrust belt extended from Canada to Mexico. Abundant sediment was eroded from the mountains and deposited in an adjacent basin (called a 'foreland basin').

The Gulf of Mexico continued opening as South America moved away from North America, and seawater encroached northward into the subsiding basin. Marine water also began to transgress southward from the Arctic region. The seas advanced and retreated many times during the Cretaceous until a seaway extended from today's Gulf of Mexico to the Arctic Ocean, a distance of about 5,000 km (3,000 mi) (Kauffman 1977). Northeastern Arizona formed part of the western border of this Western Interior Seaway, the most extensive interior seaway ever recorded in North America (fig. 29).

Approximately 75 million years ago, the Western Interior Seaway began to retreat, following the advent of the Laramide Orogeny. Unlike the steeper angle of subduction thought to be responsible for the thrust faulting of the Sevier Orogeny, the Laramide Orogeny involved relatively low angle subduction (fig. 30). Because the angle was so low, the compressive stress was transferred farther inland. Reverse faults transported deeply buried Precambrian rock units to the surface, where they are now exposed in the Rocky Mountains. The Laramide Orogeny, which lasted from roughly 75 to 35 million years ago (Late Cretaceous to the Eocene epoch in the Paleogene), is not only responsible for the modern Rocky Mountains, but also for most of the copper, silver, and gold ore deposits in the southwestern United States (Pallister et al. 1997).

Paleogene and Neogene (Tertiary) Periods (65-2.6 million years ago)

At the beginning of the Cenozoic, about 1.6 km (1 mi) of terrestrial and marine rock layers covered the Permian Kaibab Formation (Billingsley 1989; Morales 2003). The Laramide Orogeny caused the uplift of the southwestern Colorado Plateau, and subsequent erosion of most of the Mesozoic strata from the Wupatki area. North-flowing,

sediment-choked streams dominated the landscape and covered parts of northern Arizona with 100 to 200 m (330 to 650 ft) of gravelly sediments. The Laramide Orogeny also reactivated ancient, north-trending Precambrian faults. Reverse and thrust fault movement along these Precambrian fault planes horizontally shortened the western margin of North America (Marshak et al. 2000; Huntoon 2003). On the Colorado Plateau, compression during the orogeny resulted in east-dipping monoclines that overlie deep-seated, west-dipping reverse faults. The Black Point Monocline and Doney Mountain Fault formed during the orogeny. Intervening strata between monoclines were gently warped into broad, north-trending arches and basins. Subsequent erosion removed approximately 235 million years of geologic history, between the Triassic rocks and the late Pliocene or early Pleistocene Black Point Basalt, in Wupatki National Monument.

About 45 million years ago (Eocene epoch), plate movement along the west coast subduction zone slowed. As a consequence, deformation caused by plate convergence ceased in the Wupatki National Monument area (Dickinson 1981; Huntoon 2003).

Volcanism returned to Arizona approximately 26.9 million years ago (Oligocene epoch) when a large magma chamber formed beneath the Chiricahua Mountains of southeastern Arizona. When the overlying rock eventually ruptured, more than 417 cu km (100 cu mi) of magma blew out of the volcano and buried a region of at least 3,108 sq km (1,200 sq mi) under a thick blanket of ash and pumice. The roof of the magma chamber collapsed and produced the Turkey Creek Caldera (Pallister et al. 1997). This giant crater-like depression is preserved in Chiricahua National Monument (Graham 2009).

When subduction off the southwestern coast of North America ceased about 20 million years ago, volcanism waned in Arizona. The motion of the plates changed from compression to strike-slip, initiating the San Andreas Fault System and crustal extension that would result in the normal faulting that characterizes the Basin-and-Range province. During the Miocene-Pliocene epochs, the Colorado Plateau was uplifted as much as 3 to 4 km (1.8 to 2.5 mi) (Oldow et al. 1989).

About 6 million years ago (Miocene epoch), the San Francisco Volcanic Field, south of Wupatki National Monument, became a major volcanic center on the southwestern margin of the Colorado Plateau (Luedke and Smith 1991; Priest et al. 2001). Some geologists believe that a localized zone of melting, or "hot spot," in the mantle beneath Arizona, is responsible for the volcanism in the San Francisco Volcanic Field. Periodically, eruptions occur above this hot spot. Because the North American Plate moves slowly westward over this stationary source of magma, the most recent volcanoes, such as the Sunset Crater that erupted 1,000 years ago, are found in the eastern part of the volcanic field. Volcanic activity was almost continuous

during the late Cenozoic, particularly in the Pliocene and Pleistocene.

The Colorado River began eroding the Grand Canyon about 5 million years ago (or less) (Spencer et al. 2001; Lucchitta 2003). By 3.8 million years ago (Pliocene epoch), the Colorado River had established its current course in the upper Lake Mead area, and by 1 million years ago (middle Pleistocene), it had carved its present path in the western Grand Canyon (Lucchitta and Jeanne 2001; Hamblin 2003; Lucchitta 2003). As the Colorado River incised into the Colorado Plateau, its tributaries did the same, including the Little Colorado River.

The siltstone, sandstone, limestone clasts, and conglomerate that cover the floor of an incised meander channel in Antelope Wash, west of Doney Mountain, probably were deposited in a Miocene or Pliocene channel that drained to the Little Colorado River (Breed 1969; Blyth 1995). Known as the Doney Channel, the former stream is approximately 13 km (8 mi) long, with a gradient that indicates flow was to the north. Carved into the underlying Kaibab Formation, Doney Channel sediments consist of clasts derived from the Kaibab Formation and from older gravel deposits southwest of Wupatki National Monument (Billingsley et al. 2007A).

Quaternary Period (2.6 million years ago to present day)

Pleistocene Epoch (2.6-0.0117 million years ago)

Approximately 2.4 million years ago, basaltic lava from the volcanic activity in the San Francisco Volcanic Field first reached Wupatki National Monument when two lobes of the Black Point Basalt (map unit Tbp) flowed into the area. One lobe flowed northwest of the monument, forming Black Point, while the other lobe, which is referred to as the Citadel flow by Cooley (1962) and Hanson (2007), can be found on West Mesa, South Mesa, and East Mesa in Wupatki National Monument (Moore and Wolfe 1976; Billingsley et al. 2007A). Basalt flowed down tributary drainages to the Little Colorado River that had been eroded into the Moenkopi Formation. The surrounding sedimentary rocks of the Moenkopi Formation eroded more rapidly than the basalt, so that the topography became inverted. What were once valleys became mesas capped with the more-resistant basalt.

Basalt (QTb) also filled the ancestral Deadman Wash (Antelope Wash) drainage southwest of the Visitor Center, and approximately 1 million years ago, a basalt similar to the Black Point Basalt flowed north from an unknown source southwest of the monument. Called the Lava Point flow (Qmlp), the unit is exposed in the far northwestern corner of the monument (Billingsley et al. 2007A). Basalt flows erupted 1 to 1.4 million years ago, and followed older drainages that now represent inverted topography above present ephemeral stream channels near Doney Mountain.

Approximately 790,000 years ago, about the same time that pumice erupted from San Francisco Mountain and

was deposited into the area, the Woodhouse Mesa basalt flow (Qwb) entered the monument (Ulrich and Bailey 1987; Billingsley et al. 2007). Various, local basalt flows in the monument occurred between 770,000-220,000 years ago, and are exposed adjacent to present stream drainages. Fissure eruptions (eruptions along elongate fractures rather than a central vent), about 68,000-70,000 years ago, formed Doney Mountain. Two basalt flows from the eruption flowed downhill towards the future site of the Visitor Center. The youngest basalt flows in Wupatki National Monument resulted from the Merriam Crater eruption approximately 19,000 years ago, when lava flowed into the Little Colorado River along the eastern border of Wupatki National Monument (Qmcb).

Fluvial and stream terrace deposits in the Wupatki Basin record a Cenozoic history of uplift and erosion. These deposits document two successive periods of erosion that beveled the surface to Cretaceous, Triassic, and Permian rocks. One surface, known as the Black Point pediment, developed in the late Pliocene and early Pleistocene. The other surface formed in the middle to late Pleistocene (Wupatki pediment). Younger, late Pleistocene fluvial deposits that underlie the Merriam Crater basalt flow document a low sinuosity, ephemeral Little Colorado River that occupied channels approximately 33 m (10 ft) and 65 m (21 ft) above the modern floodplain (Blyth 1995).

As many as seven Pleistocene stream terraces occupied the landscape between Cameron and Winslow, Arizona during the Black Point and Wupatki erosion cycles. Four of these terrace deposits have been mapped in Wupatki National Monument (Blyth 1995). These older terrace deposits are identified as Pleistocene (Qg3) and Pleistocene/Holocene (Qg2) (Billingsley et al. 2007A).

Holocene Epoch (11,700 years ago to present day)

Downcutting continued into the Holocene, resulting in younger alluvial fan (Qa1) and terrace deposits (Qg1) in the monument. Many intermittent, ephemeral streams cross the Wupatki Basin and Antelope Prairie. The main streams include the Kana'a, Heiser, Deadman, Doney Mountain, Antelope and Citadel washes. Wind distributed sand and volcanic ash into dunes and sand sheets that today spread across the surface northeast of the Little Colorado River.

Dissolution by groundwater, and continued erosion along faults and joints in the Kaibab Formation, have created deep fissures, or earthcracks, and depressions associated with tectonic grabens (Blyth 1995; Billingsley et al. 2007A). The distinctive blowholes in Wupatki National Monument connect to fissures and solution caves in the Kaibab Formation.

Volcanic eruptions from the stationary hot spot beneath the San Francisco Volcanic Field continued into the Holocene, as well. The most recent eruptive activity took place about 1,000 years ago and formed Sunset Crater, Arizona's youngest volcano (Priest et al. 2001).

Eon	Era	Period	Epoch	Ma	Life Forms	North American Events	
Phanerozoic	Cenozoic	Quaternary	Holocene	0.01	Age of Mammals	Modern humans	Cascade volcanoes (W)
			Pleistocene			Extinction of large mammals and birds	Worldwide glaciation
		Neogene	Pliocene	2.6		Large carnivores	Sierra Nevada Mountains (W)
			Miocene	5.3		Whales and apes	Linking of North and South America
			Oligocene	23.0			Basin-and-Range extension (W)
		Paleogene	Eocene	33.9			
			Paleocene	55.8		Early primates	Laramide Orogeny ends (W)
			65.5				
	Mesozoic	Cretaceous		Age of Dinosaurs	Mass extinction	Laramide Orogeny (W)	
		Jurassic	145.5		Placental mammals	Sevier Orogeny (W)	
		Triassic	199.6		Early flowering plants	Nevadan Orogeny (W)	
	Paleozoic			251	Age of Amphibians	Mass extinction	Supercontinent Pangaea intact
		Permian		Coal-forming forests diminish		Ouachita Orogeny (S)	
		Pennsylvanian	299	Coal-forming swamps		Alleghanian (Appalachian) Orogeny (E)	
		Mississippian	318.1	Sharks abundant		Ancestral Rocky Mountains (W)	
		Devonian	359.2	Variety of insects			
		Silurian	416	First amphibians			
		Ordovician	443.7	First reptiles		Antler Orogeny (W)	
		Cambrian	488.3	Mass extinction		Acadian Orogeny (E-NE)	
Proterozoic			542	Fishes	First land plants		
					Mass extinction		
					First primitive fish	Taconic Orogeny (E-NE)	
					Trilobite maximum		
Archean	Precambrian			Marine Invertebrates	Rise of corals	Avalonian Orogeny (NE)	
					Early shelled organisms	Extensive oceans cover most of proto-North America (Laurentia)	
Hadean	Precambrian				First multicelled organisms	Supercontinent rifted apart	
					Jellyfish fossil (670 Ma)	Formation of early supercontinent	
			2500		Grenville Orogeny (E)	First iron deposits	
			≈4000		Abundant carbonate rocks		
					Early bacteria and algae		
					Oldest known Earth rocks (≈3.96 billion years ago)		
					Origin of life?	Oldest moon rocks (4–4.6 billion years ago)	
					Formation of Earth's crust		
				4600	Formation of the Earth		

Figure 23. Geologic timescale. Included are major life history and tectonic events occurring on the North American continent. Red lines indicate major unconformities between eras. Radiometric ages shown are in millions of years (Ma). Compass directions in parentheses indicate the regional location of individual geologic events. Adapted from the U.S. Geological Survey, <http://pubs.usgs.gov/fs/2007/3015> with additional information from the International Commission on Stratigraphy, <http://www.stratigraphy.org/view.php?id=25>.

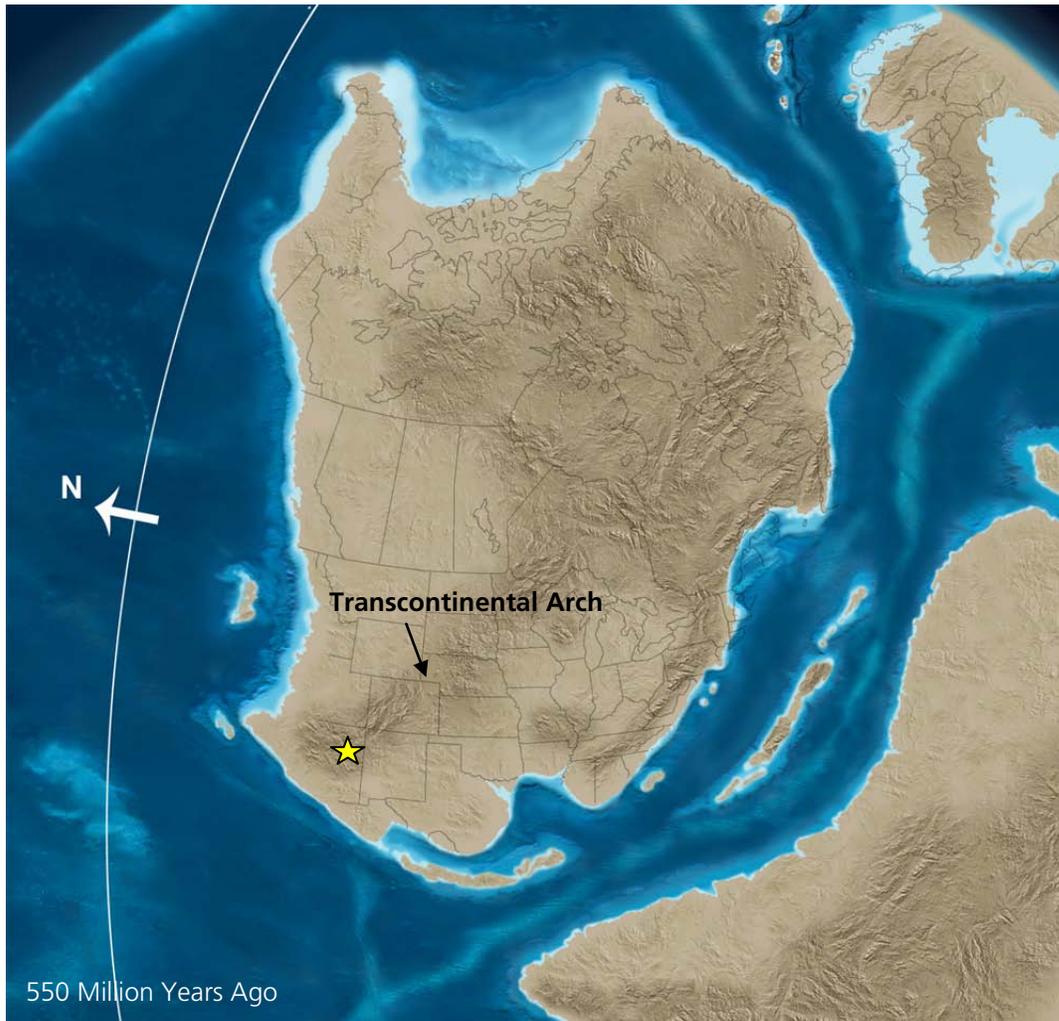


Figure 24. Late Precambrian paleogeography of North America. Approximately 550 million years ago, most of what is now Arizona had been attached to the proto-North American continent, which lay south of the equator (white line). The Transcontinental Arch remained a prominent structural feature well into the early Paleozoic. The yellow star (not to scale) represents the approximate location of today's Wupatki National Monument. Brown colors represent land surface. Relative depths of marine water are divided into shallow (light blue) and deep (dark blue). Base map by Dr. Ron Blakey (Northern Arizona University Department of Geology), available online: <http://jan.ucc.nau.edu/rcb7/namPC550.jpg>, accessed December 27, 2010. Annotations by the author.



Figure 25. Late Cambrian paleogeography of North America. By approximately 500 million years ago, a major sea level rise had inundated most of the continental area that is now the United States. The white line represents the equator. The yellow star (not to scale) represents the approximate location of today's Wupatki National Monument. Brown colors represent land surface. Relative depths of marine water are divided into shallow (light blue) and deep (dark blue). Base map by Dr. Ron Blakey (Northern Arizona University Department of Geology), available online: <http://jan.ucc.nau.edu/rcb7/namC500.jpg>, accessed December 27, 2010. Annotations by the author.



- Actively Subsiding Sedimentary Basins during the Permian
- | | |
|-----------------------------|-----------------------|
| ArB: Arbuckle Basin | MiB: Midland Basin |
| BSB: Bird Springs Basin | OqB: Oquirrh Basin |
| DeB: Delaware Basin | OrB: Orogrande Basin |
| DnB: Denver Basin | PeB: Pedregosa Basin |
| EIB: Ely Basin | WRB: Wood River Basin |
| GCE: Grand Canyon Embayment | |
- Other Terranes Accreting to Ancestral North America
- PGT: Peri-Gondwanan Terranes
 Qu: Quesnell
 St: Stikine

Figure 26. Permian paleogeography of southwestern North America during deposition of the Kaibab Formation, approximately 275-270 million years ago. Remnants of the northwest-southeast trending Ancestral Rocky Mountains can still be seen in Colorado. The Pedregosa Basin (PeB) in southeastern Arizona and southwestern New Mexico is closing as South America (part of the PGT) collides with North America. An active subduction zone lies along the western margin of the landmass that will soon become the supercontinent, Pangaea. The yellow star represents the approximate location of today's Wupatki National Monument. Brown colors represent land surface. Relative depths of marine water are divided into shallow (light blue) and deep (dark blue). Base map by Dr. Ron Blakey (Northern Arizona University Department of Geology), available online: <http://jan.ucc.nau.edu/rcb7/garm270.jpg>, accessed September 13, 2010. Annotations by the author.

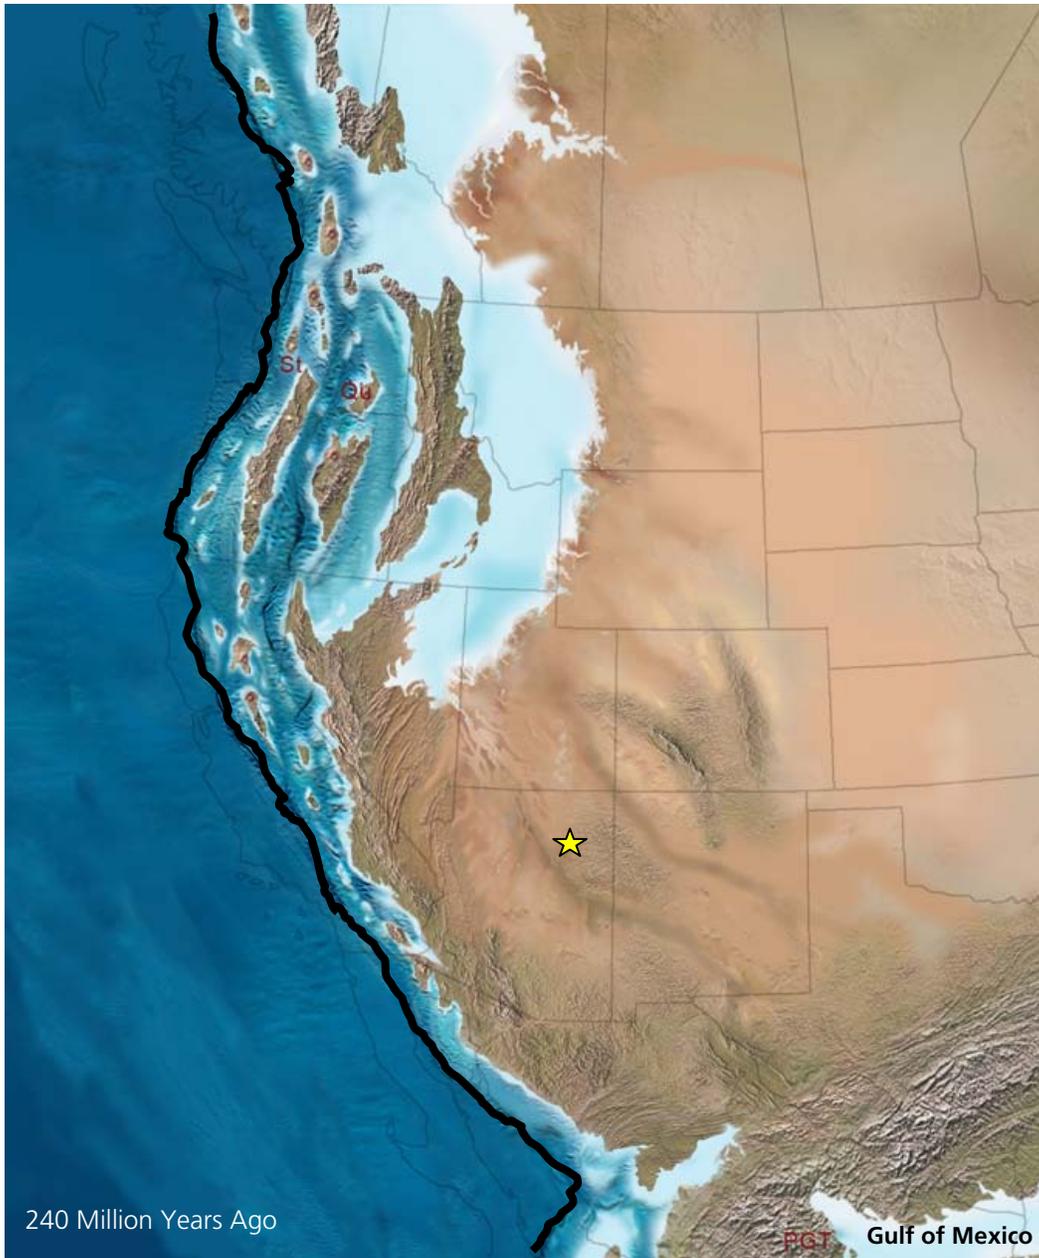


Figure 27. Early Triassic paleogeography of southwestern North America during deposition of the Moenkopi Formation approximately 240 million years ago. The Permian sea had withdrawn from Arizona. A subduction zone continued to be active along the western margin of North America (thick black line), and the Gulf of Mexico began to open. The yellow star represents the approximate location of today's Wupatki National Monument. Brown colors represent land surface. Relative depths of marine water are divided into shallow (light blue) and deep (dark blue). Base map by Dr. Ron Blakey (Northern Arizona University Department of Geology), available online: <http://jan.ucc.nau.edu/rcb77/garm240.jpg>, accessed September 13, 2010. Annotation by the author.

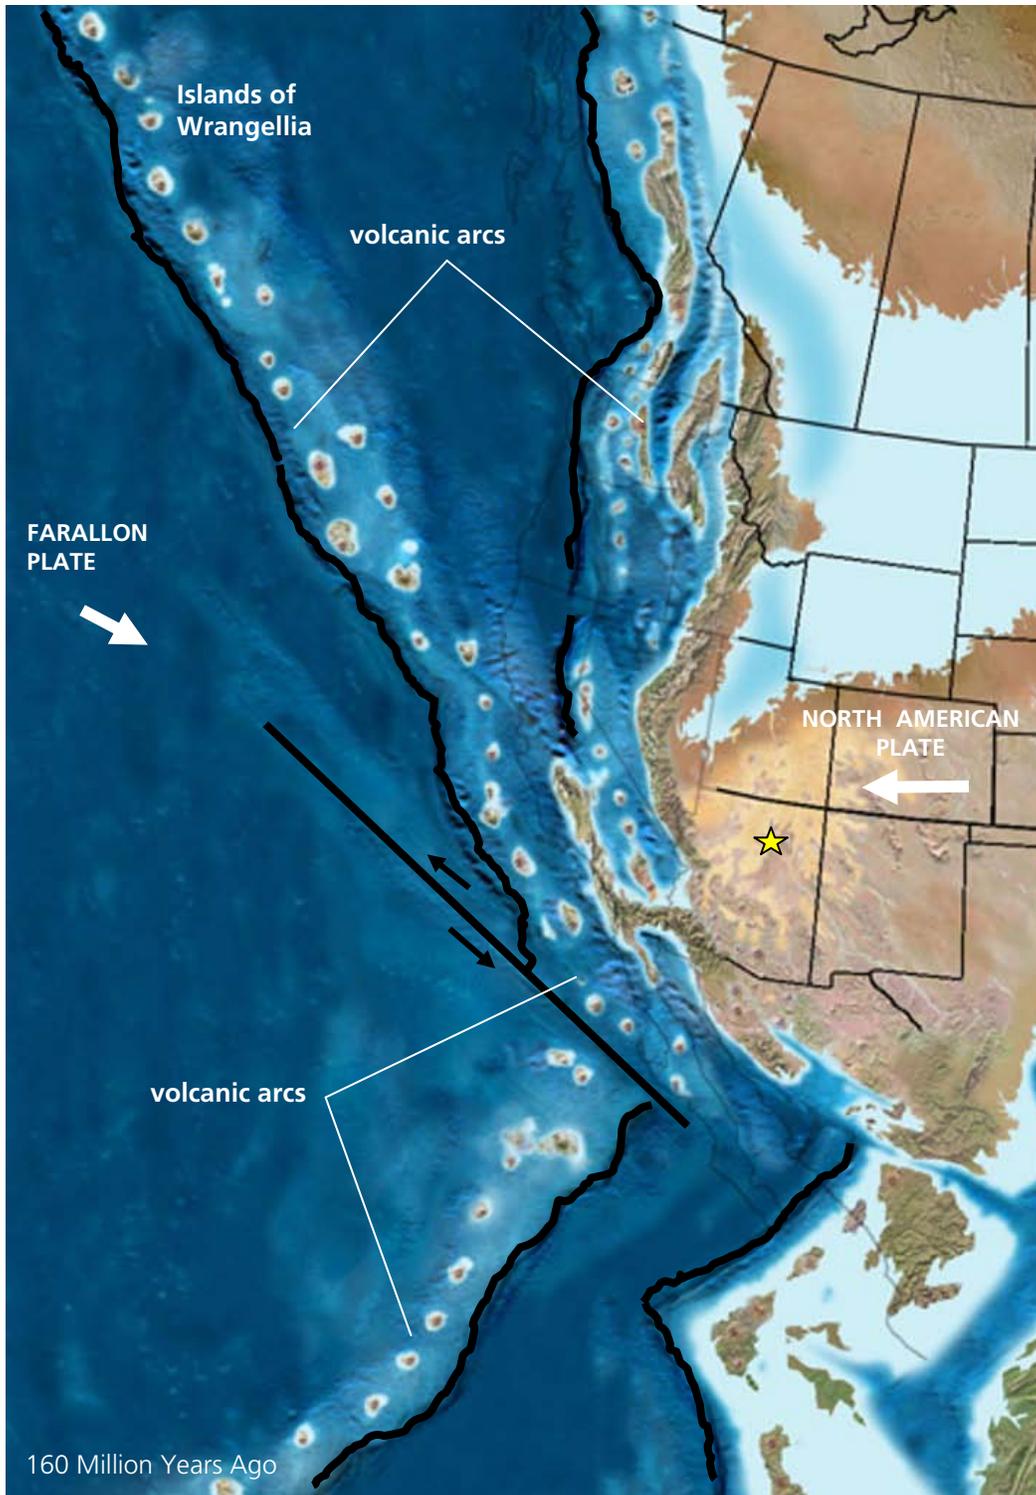


Figure 28. Middle Jurassic paleogeography of western North America. Approximately 160 million years ago, oblique convergence between the North American Plate and the Farallon Plate has created a transform (strike-slip) fault along the southwestern margin of North America. Volcanic islands (volcanic arc) form above subduction zones. White arrows indicate the general direction of plate movement. Black arrows indicate movement along the transform fault. In this case, movement is left-lateral (sinistral). The yellow star represents the approximate location of today's Wupatki National Monument. Brown colors represent land surface. Relative depths of marine water are divided into shallow (light blue) and deep (dark blue). Base map by Dr. Ron Blakey (Northern Arizona University Department of Geology), available online: <http://jan.ucc.nau.edu/rcb7/jur160seattle.html>, accessed December 28, 2010. Annotation by the author.


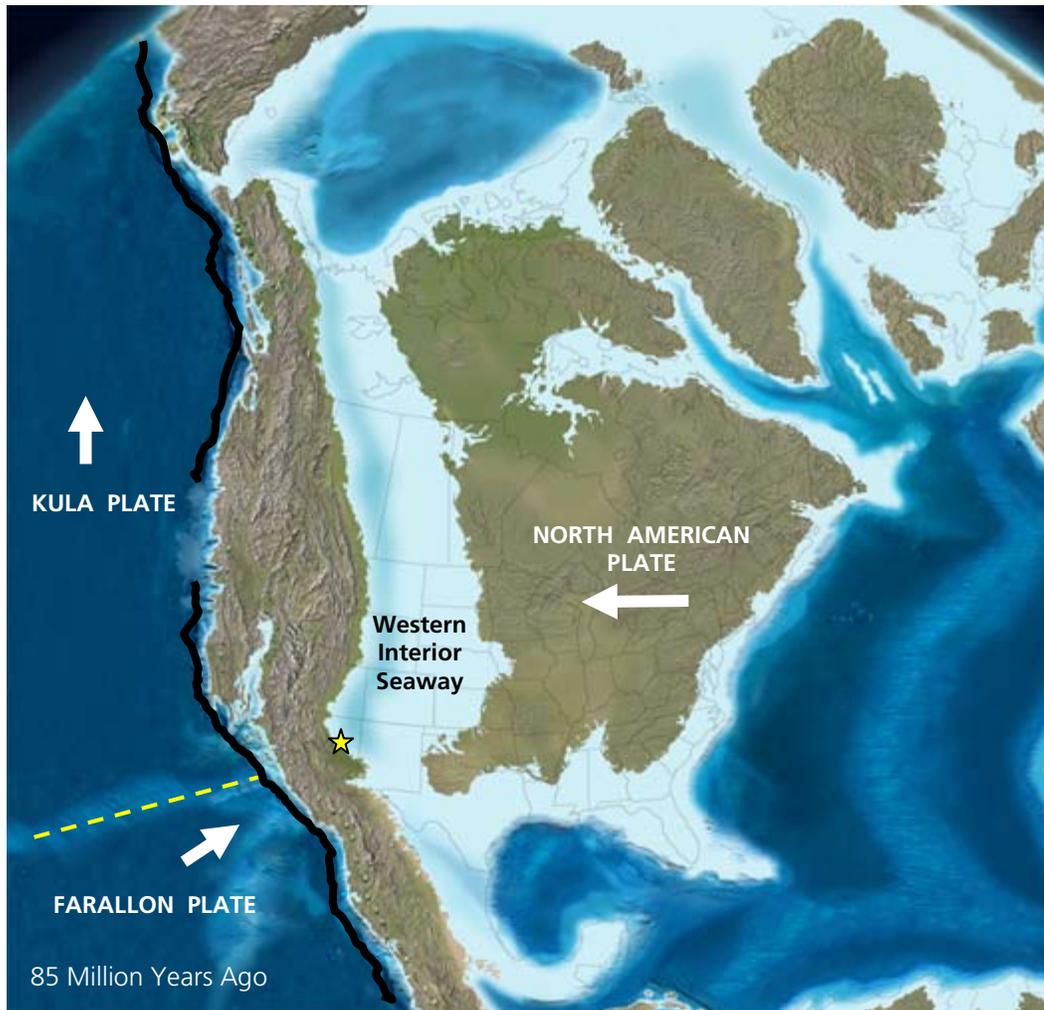


Figure 29. Late Cretaceous paleogeography of North America. Approximately 85 million years ago, the Western Interior Seaway spread from the Gulf of Mexico to the Arctic Ocean. The Sevier Orogeny, generated by tectonic plate collision, produced fold-and-thrust belt mountains along the western continental margin. Regional metamorphism affected western Arizona and eastern California. Paleozoic and Mesozoic sandstone, mudstone, and limestone were metamorphosed to quartzite, schist, and marble. The yellow star marks the approximate location of today's Wupatki National Monument. Arrows indicate the general direction of plate movement. Dashed line marks the approximate contact between the Farallon Plate and Kula Plate. Brown color is land surface. Relative depths of marine water are divided into shallow (light blue) and deep (dark blue). Base map by Dr. Ron Blakey (Northern Arizona University Department of Geology), available online: <http://jan.ucc.nau.edu/rcb7/namK85.jpg>, accessed September 13, 2010. Annotation by the author.

a) Normal-Angle Subduction

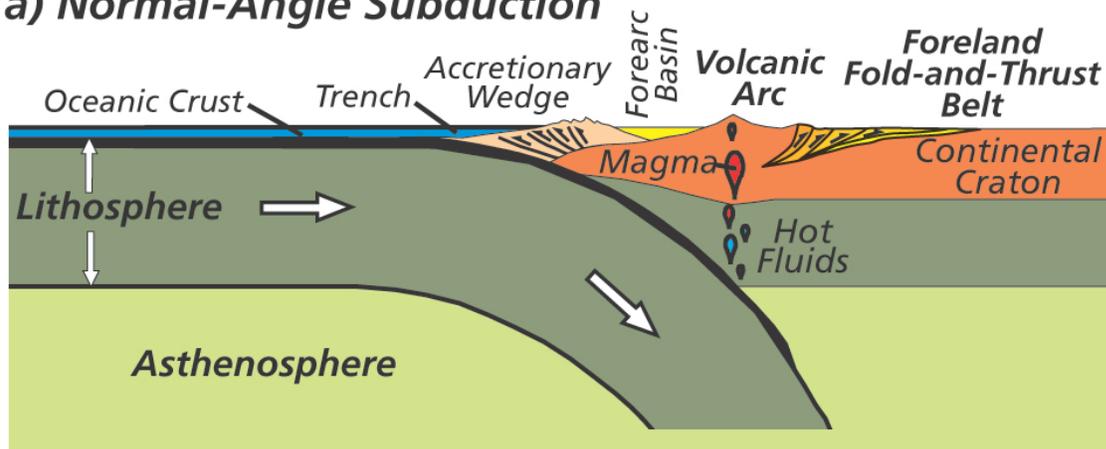

b) Low-Angle Subduction

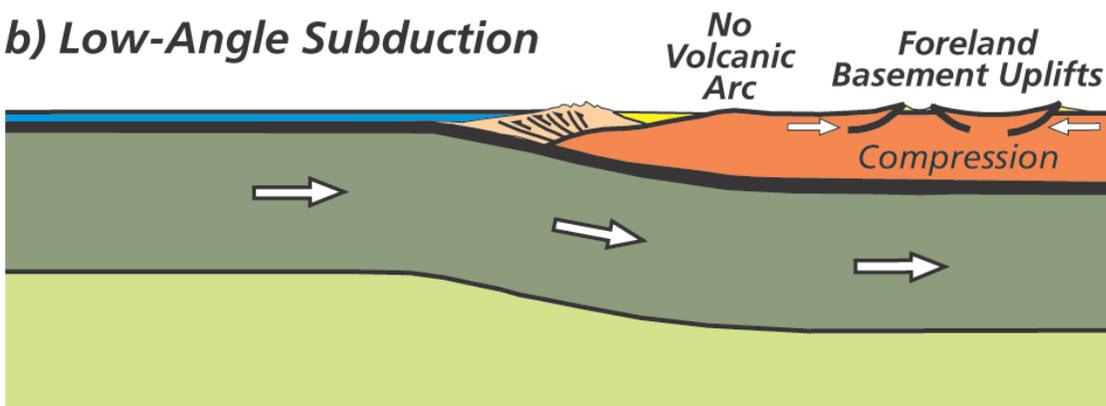


Figure 30. Normal-angle and low-angle subduction diagrams. A) In a normal plate-tectonic setting, a relatively steep angle of subduction causes melting above the downgoing slab. Magma rises to the surface and erupts, forming a chain of volcanoes (volcanic arc) along the continental margin, similar to the present Andes Mountains of South America. Sedimentary strata are folded and thrust toward the continental craton in a "foreland fold-and-thrust belt." In the Triassic, oceanic-oceanic plate convergence caused the volcanic arc to form offshore. During the Jurassic, the oceanic plate collided with the North American continent and the volcanic arc formed along the western margin of North America, as depicted in this diagram. B) During the Laramide Orogeny, the subducting slab flattened out, and deformation occurred farther inland. The downgoing slab in low-angle subduction does not extend deep enough to heat up and produce magma so volcanism ceases or migrates toward the craton. The subducting slab transmits stress farther inland, causing hard rock in the crust to compress and break along reverse faults, forming basement uplifts such as those in today's Rocky Mountains. Diagram by Dr. Robert J. Lillie (Oregon State University).

Geologic Map Data

This section summarizes the digital geologic data available for Wupatki National Monument. It includes an overview graphic of the GIS data and a summary table that lists each map unit displayed on the digital geologic map for Wupatki National Monument. Complete GIS data are included on the accompanying CD and are also available at the Geologic Resources Inventory (GRI) publications website: (http://www.nature.nps.gov/geology/inventory/gre_publications.cfm).

Geologic Maps

Geologic maps facilitate an understanding of an area's geologic framework and the evolution of its present landscape. Using designated colors and symbols, geologic maps portray the spatial distribution and relationships of rocks and unconsolidated deposits. Geologic maps also may show geomorphic features, structural interpretations, and locations of past geologic hazards that may be prone to future activity. Additionally, anthropogenic features such as mines and quarries may be indicated on geologic maps.

Source Maps

The Geologic Resources Inventory (GRI) team converts digital and/or paper source maps into the GIS formats that conform to the GRI GIS data model. The GRI digital geologic map product also includes essential elements of the source maps including unit descriptions, map legend, map notes, references, and figures. The GRI team used the following source maps to create the digital geologic data for Wupatki National Monument:

Billingsley, G. H., S.S. Priest., and T.J. Felger. 2007, Geologic map of the Cameron 30' x 60' quadrangle, Coconino County, northern Arizona (scale 1:100,000). Scientific Investigations Map 2977. U.S. Geological Survey, Denver, Colorado, USA.

Billingsley, G. H., S.S. Priest., and T.J. Felger. 2007, Geologic map of Wupatki National Monument and Vicinity, Coconino County, northern Arizona (scale 1:24,000). Scientific Investigations Map 2958. U.S. Geological Survey, Denver, Colorado, USA.

These source map(s) provided information for the "Geologic Issues," "Geologic Features and Processes," and "Geologic History" sections of this report.

Geologic GIS Data

The GRI team implements a GIS data model that standardizes map deliverables. The data model is included on the enclosed CD and is also available online (<http://science.nature.nps.gov/im/inventory/geology/GeologyGISDataModel.cfm>). This data model dictates GIS data structure including layer architecture, feature attribution, and relationships within ESRI ArcGIS software. The GRI team digitized the data for Wupatki National Monument using data model version 2.0.

GRI digital geologic data for Wupatki National Monument are included on the attached CD and are available through the NPS Natural Resource Information Portal (<https://nrinfo.nps.gov/Reference.mvc/Search>). Enter "GRI" as the search text and select Wupatki National Monument from the unit list. The following components and geology data layers are part of the data set:

- Data in ESRI geodatabase and shapefile GIS formats
- Layer files with feature symbology
- Federal Geographic Data Committee (FGDC)-compliant metadata
- A help file (.hlp) that contains all of the ancillary map information and graphics, including geologic unit correlation tables and map unit descriptions, legends, and other information captured from source maps.
- An ESRI map document file (.mxd) that displays the digital geologic data

Geology data layers in the Wupatki National Monument GIS data

Data Layer	Code	On Overview?
<i>Geologic attitude observation localities</i>	<i>ATD</i>	<i>No</i>
<i>Folds</i>	<i>FLD</i>	<i>Yes</i>
<i>Faults</i>	<i>FLT</i>	<i>Yes</i>
<i>Geologic Line Features</i>	<i>GLF</i>	<i>No</i>
<i>Geologic units</i>	<i>GLG</i>	<i>Yes</i>
<i>Geologic contacts</i>	<i>GLGA</i>	<i>Yes</i>
<i>(Non-attitude) Geologic Measurement Localities</i>	<i>GML</i>	<i>Yes</i>
<i>Geologic Point Features</i>	<i>GPF</i>	<i>No</i>
<i>Hazard Point Features</i>	<i>HZP</i>	<i>No</i>
<i>Mine (and mine related) Point Features</i>	<i>MIN</i>	<i>No</i>
<i>Geologic Cross Section Lines</i>	<i>SEC</i>	<i>No</i>
<i>Map Symbology</i>	<i>SYM</i>	<i>Yes</i>
<i>Volcanic Line Features</i>	<i>VLV</i>	<i>Yes</i>
<i>Volcanic Point Features</i>	<i>VPF</i>	<i>No</i>

Note: All data layers may not be visible on the overview graphic.

Overview Graphic of Digital Geologic Data

The overview graphic on the following page displays the GRI digital geologic data draped over a shaded relief image of Wupatki National Monument and includes basic geographic information. For graphic clarity and legibility, not all GIS feature classes are visible on the overview graphic. The digital elevation data and geographic information are not included with the GRI digital geologic GIS data for Wupatki National Monument, but are available online from a variety of sources.

Map Unit Properties Table

The geologic units listed in the map unit properties table (fold-out pages after the overview graphic) correspond to the accompanying digital geologic data. Following overall structure of the report, the table highlights the geologic issues, features, and processes associated with each map unit. The arrangement of the units in the table—from youngest (top) to oldest (bottom)—indicates a sequence of geologic events and the spatial and temporal relationships among the units. The units, their relationships, and the series of events that created them are highlighted in the “Geologic History” section. Please refer to the geologic timescale (fig. 24) for the geologic period and age associated with each unit.


Use Constraints

Graphic and written information provided in this section is not a substitute for site-specific investigations, and ground-disturbing activities should neither be permitted nor denied based upon the information provided here. Minor inaccuracies may exist regarding the location of geologic features relative to other geologic or geographic features on the overview graphic. Based on the source map scale (1:24,000) and U.S. National Map Accuracy Standards, geologic features represented here are within 12 meters /40 feet (horizontally) of their true location.

Please contact GRI with any questions.




Overview of Digital Geologic Data for Wupatki NM

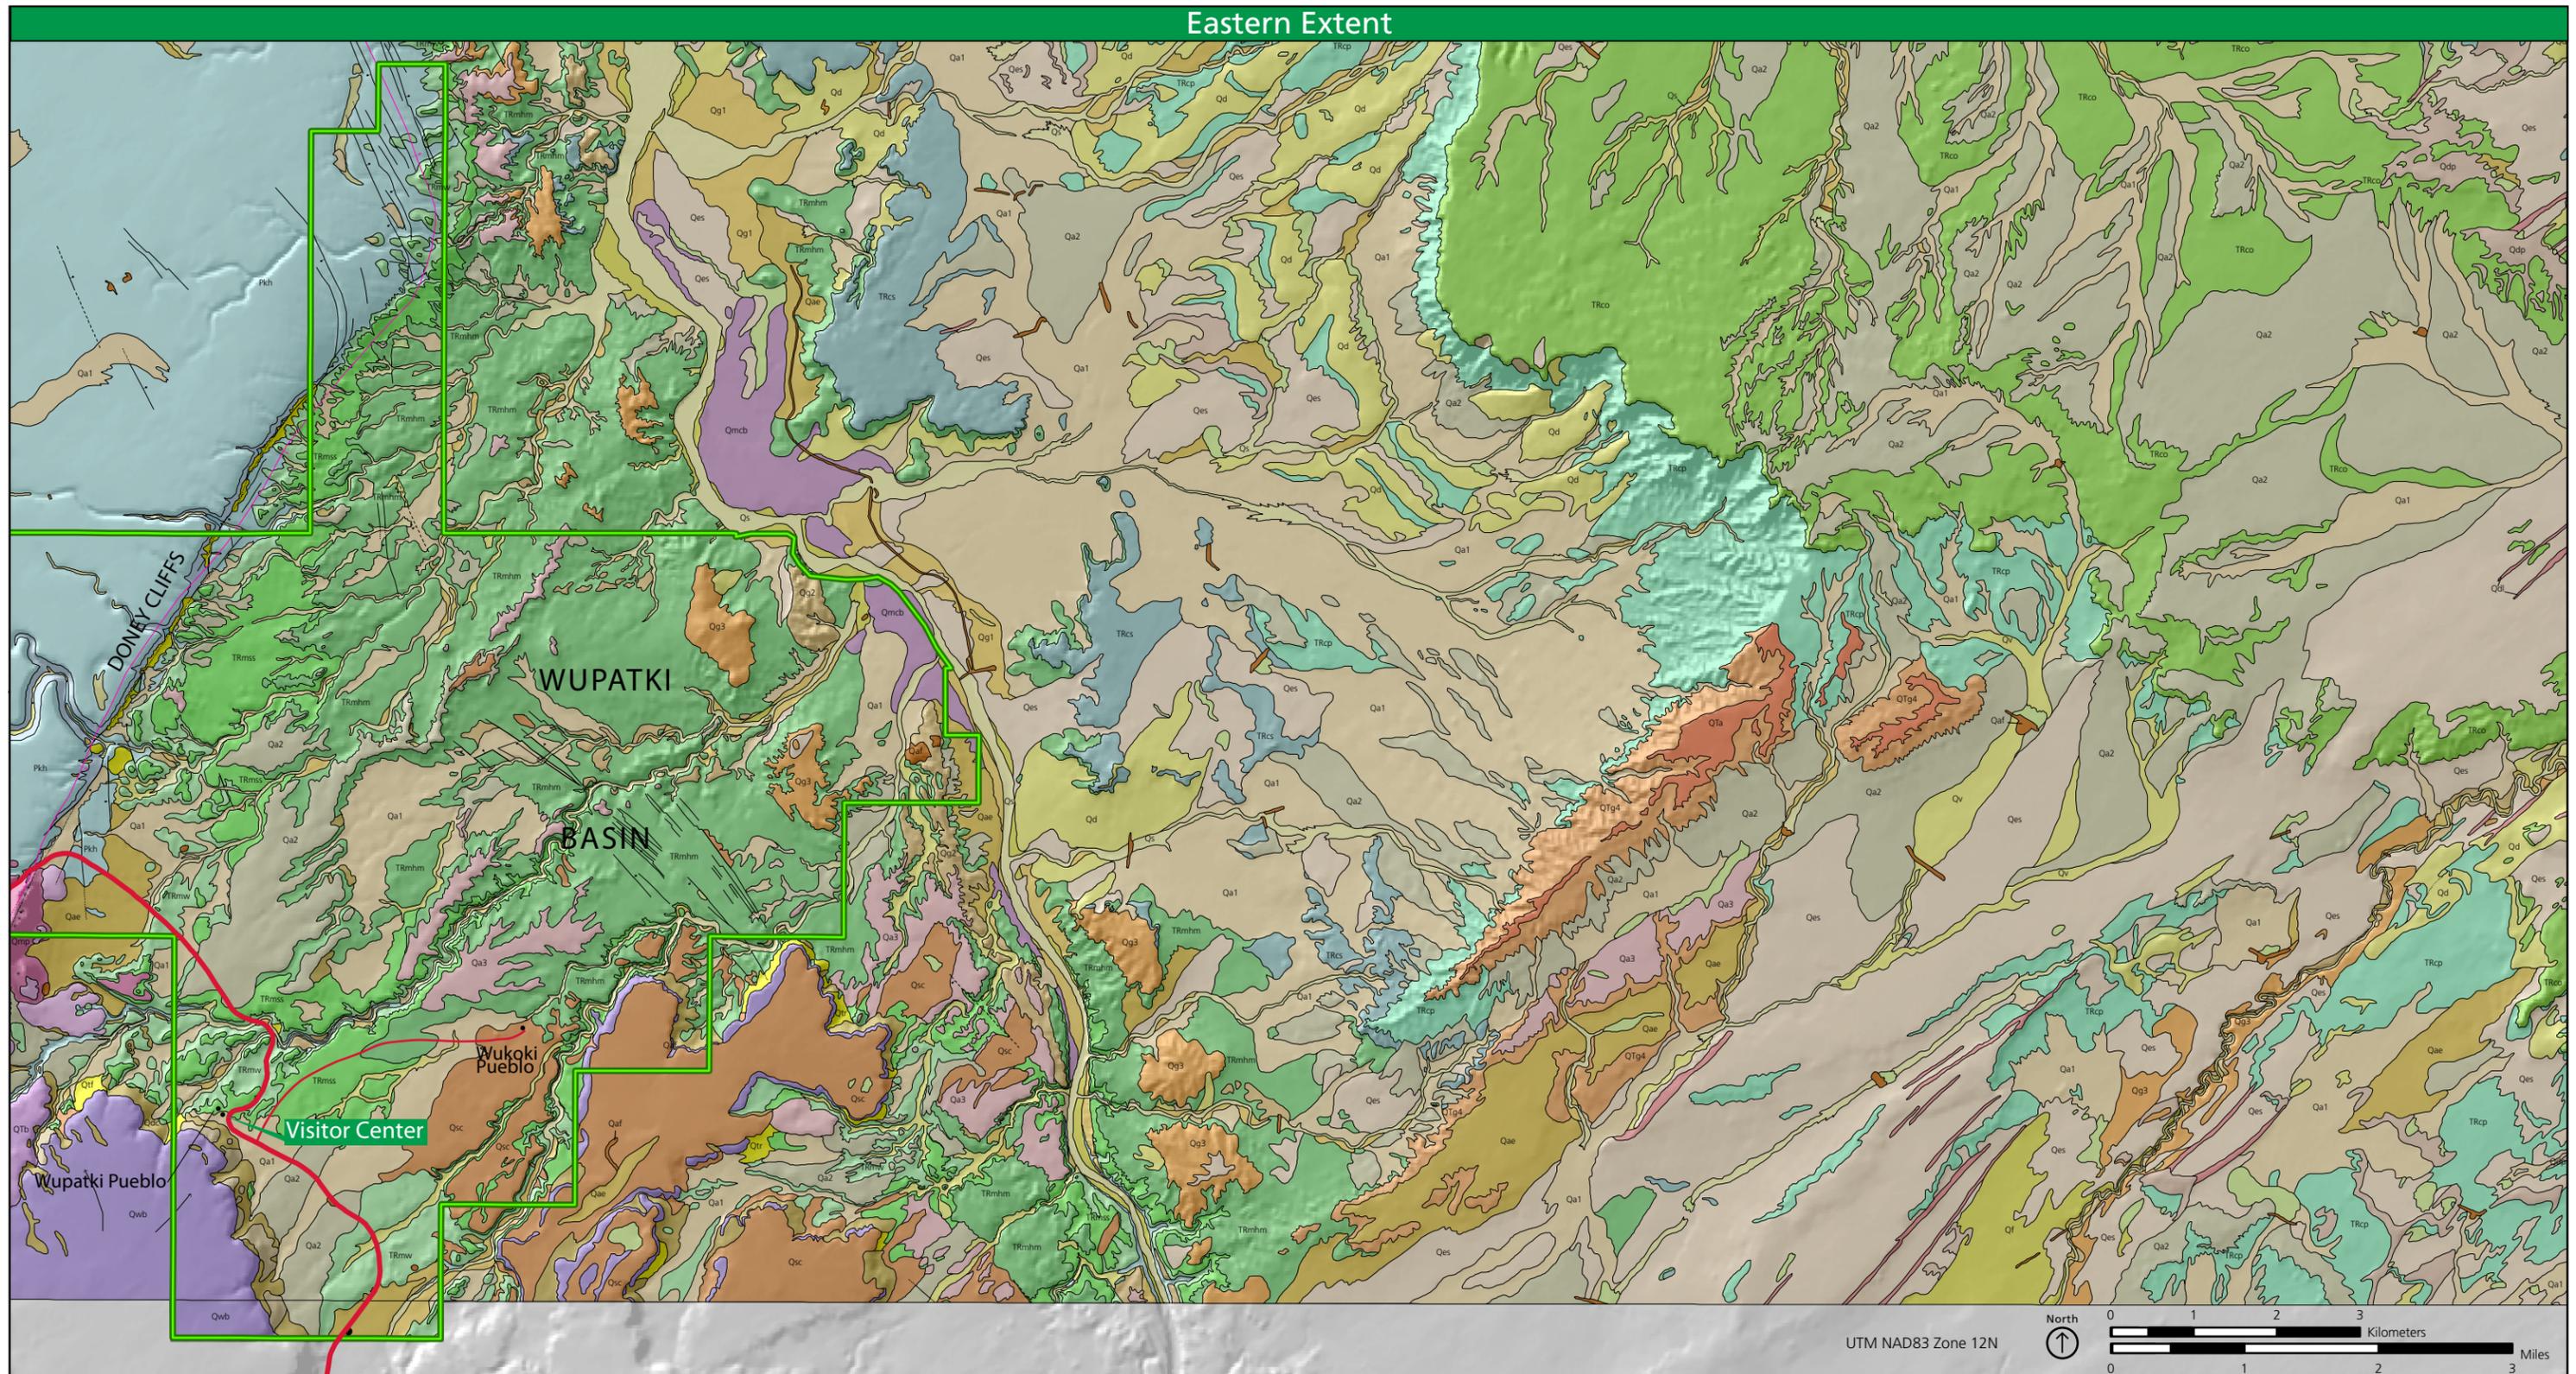




Overview of Digital Geologic Data for Wupatki NM

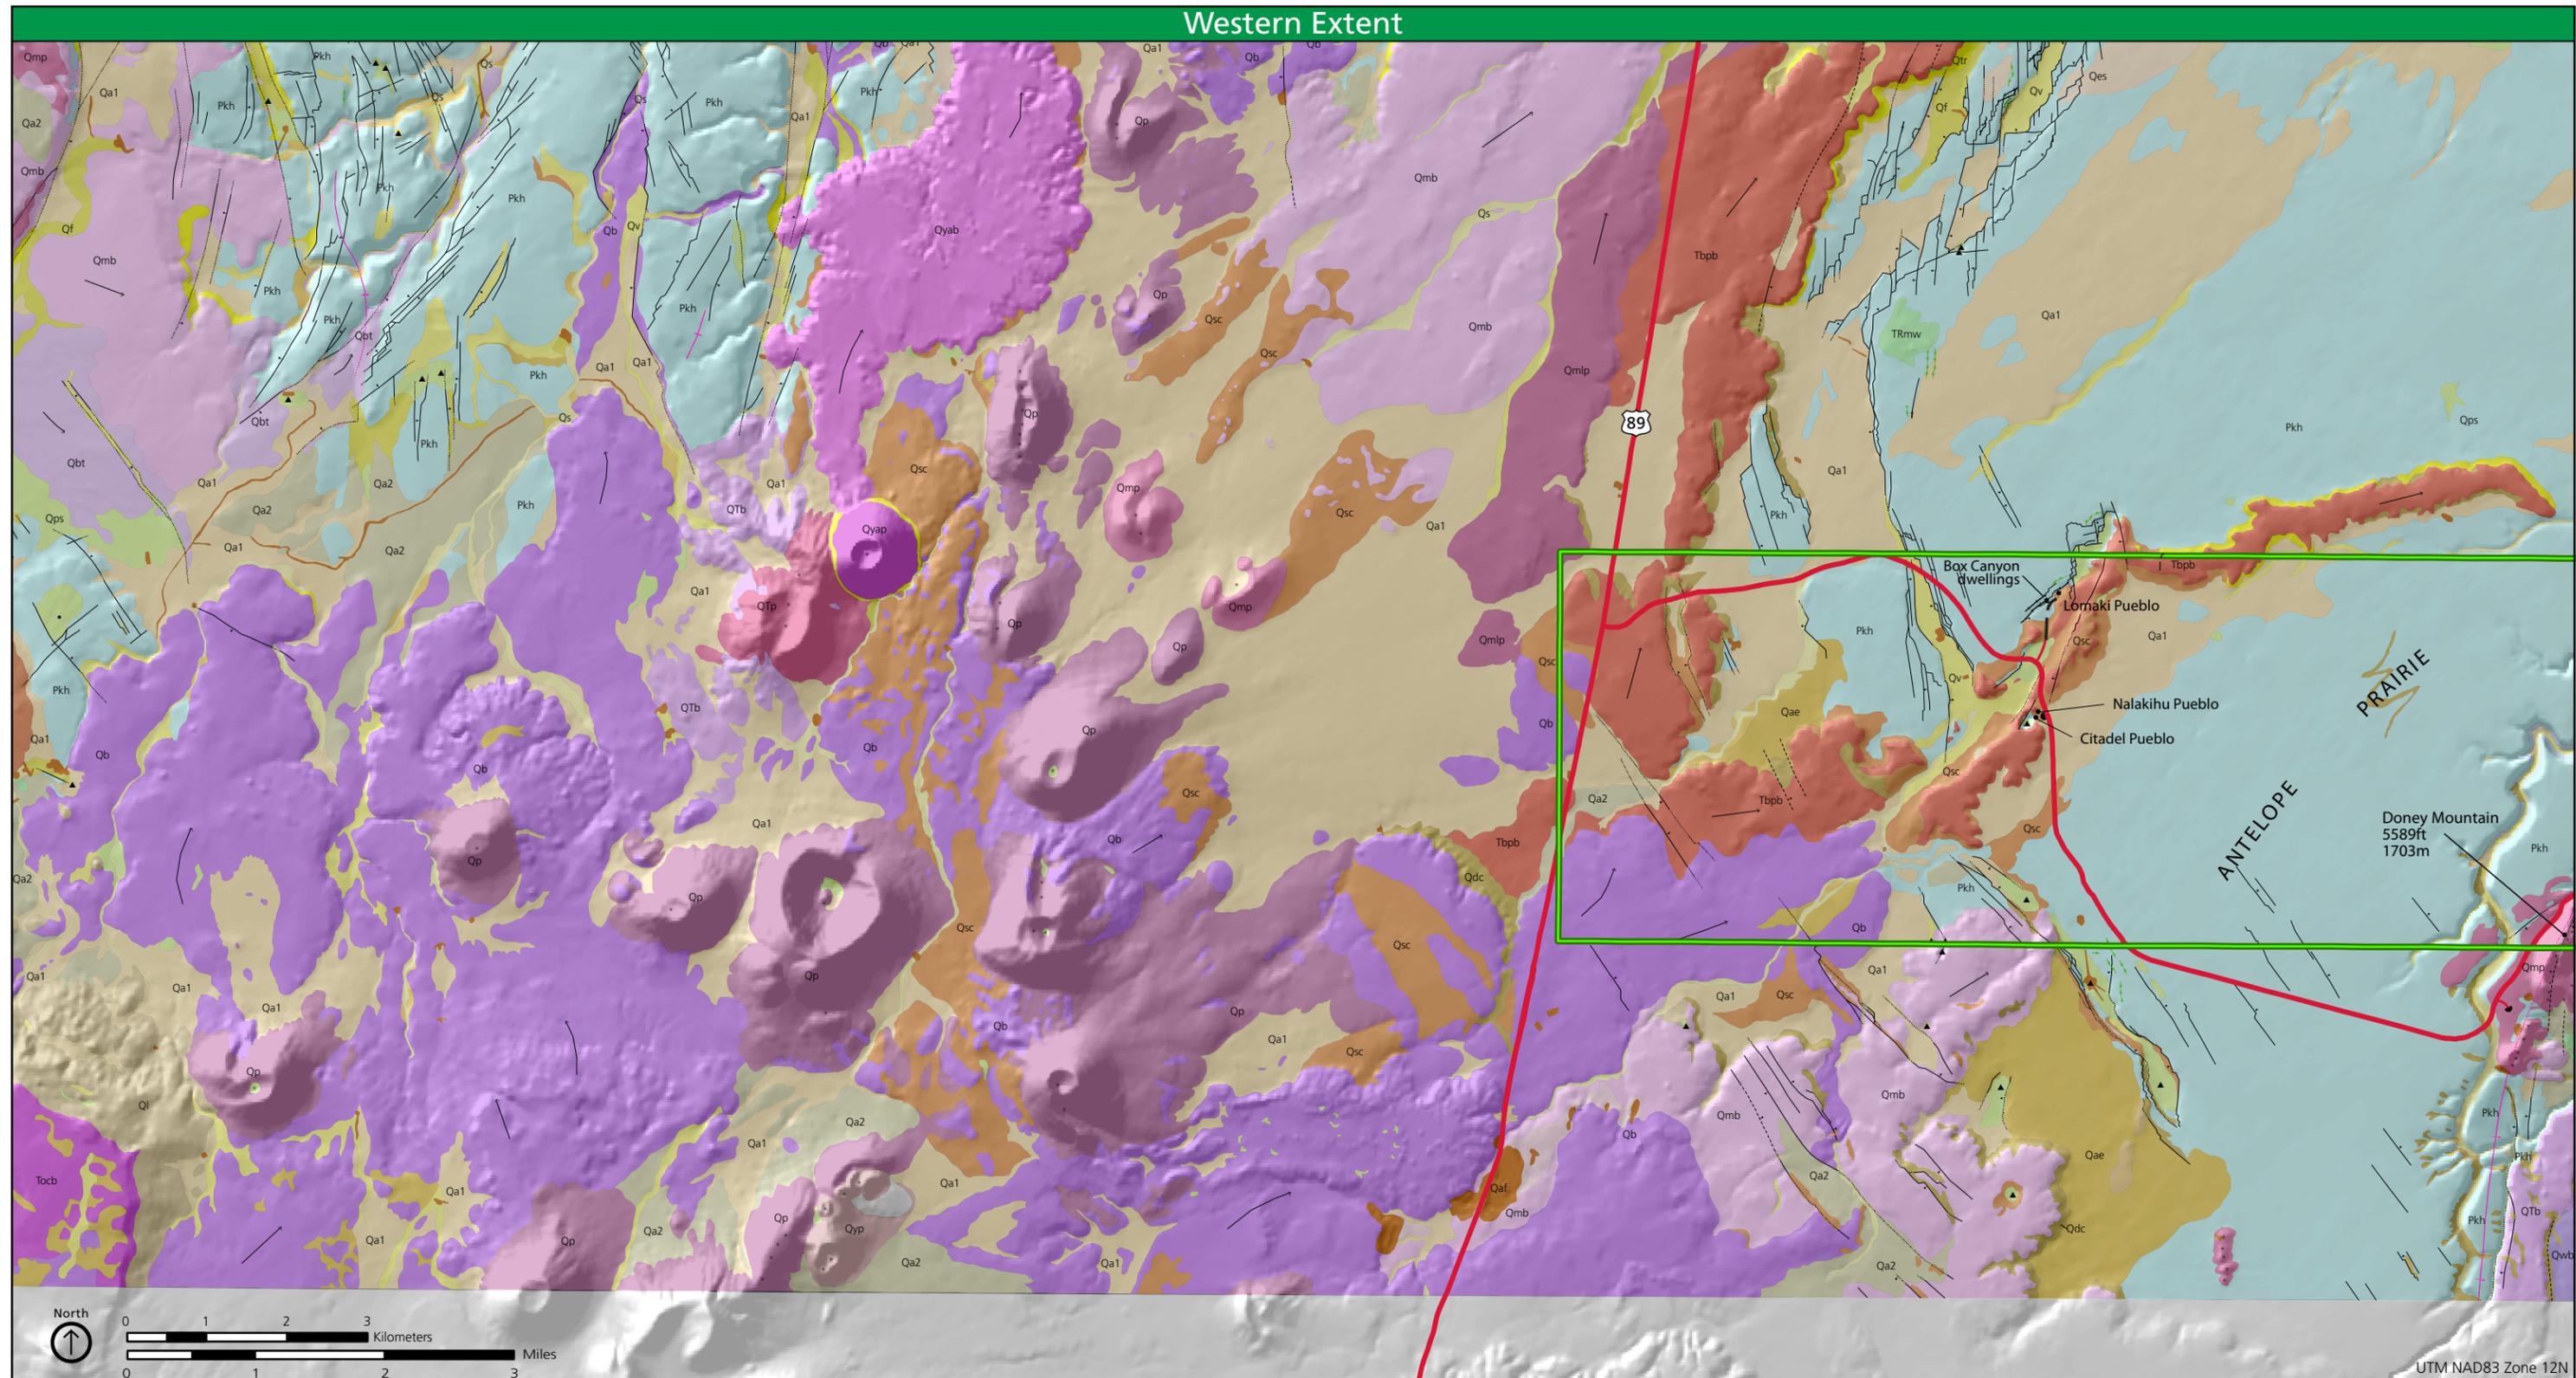



Overview of Digital Geologic Data for Wupatki NM

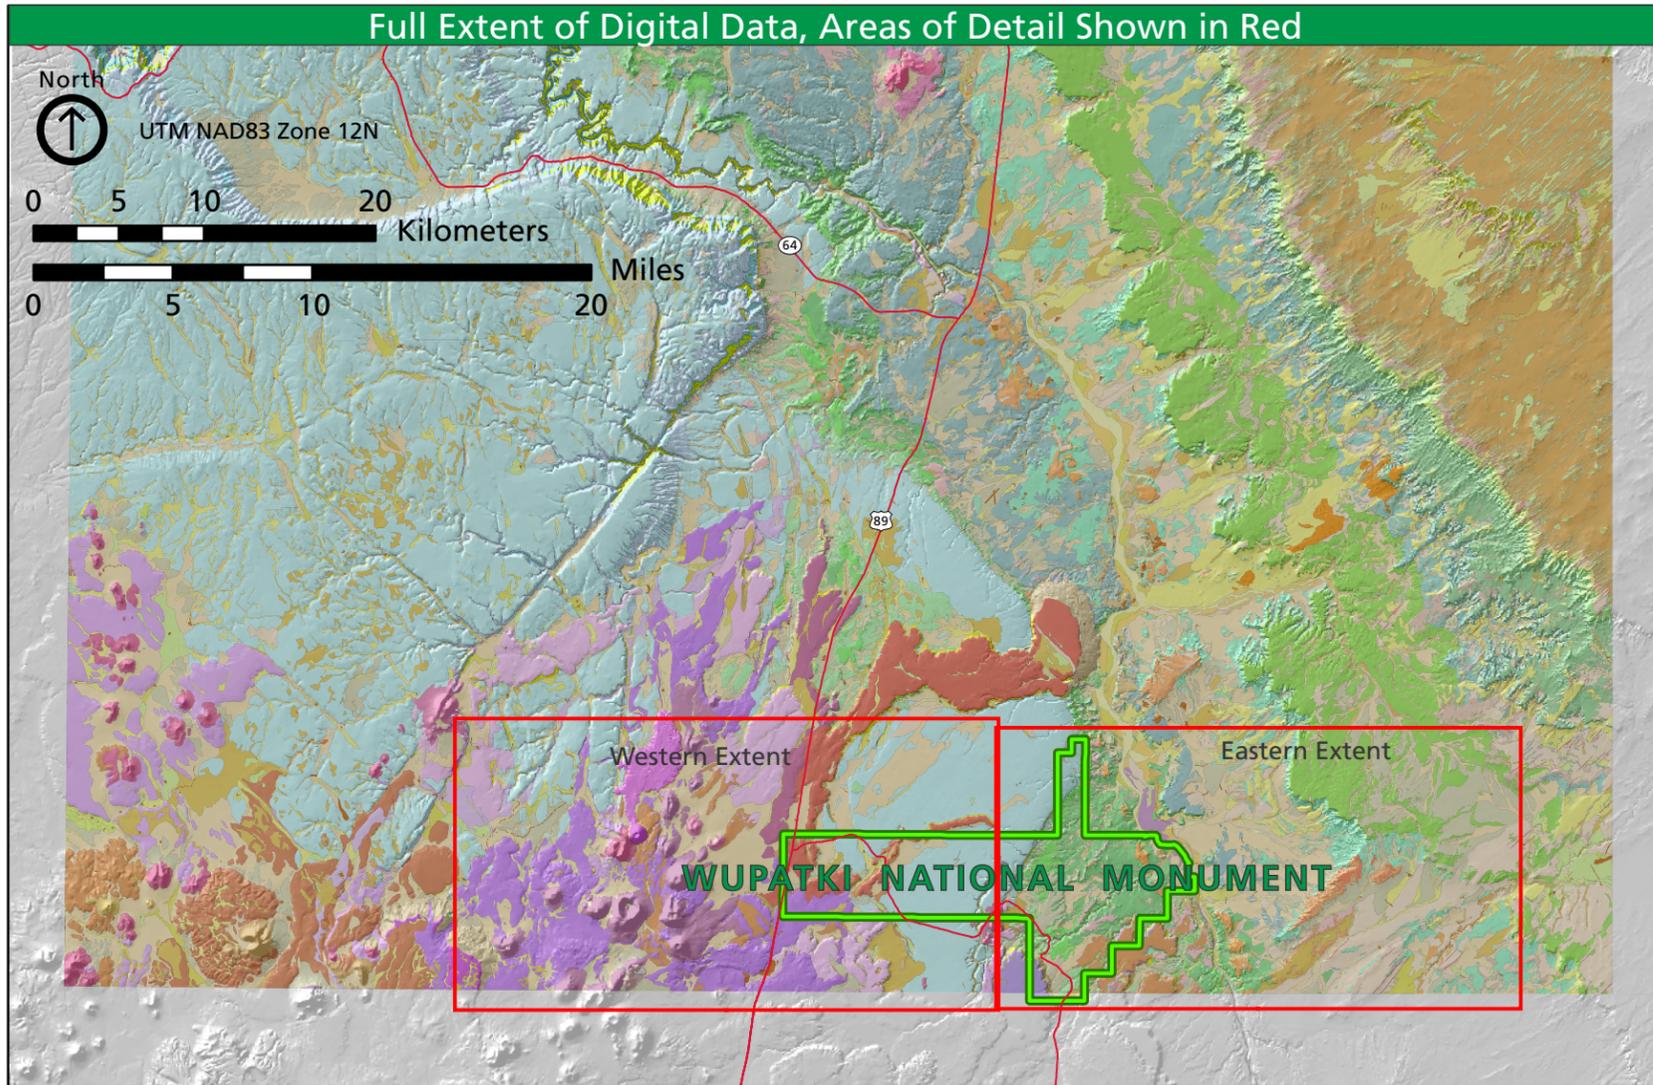

Geologic Units

- | | |
|---|--|
| Qaf - Artificial fill and quarries | Qsfp - pumice of San Francisco Mountain |
| Qs - Stream-channel deposits | Qmbi - basalt dike |
| Qf - Flood-plain deposits | Qmp - pyroclastic deposits |
| Qd - Dune sand and sand sheet deposits | Qmb - basalt flows |
| Qes - Young eolian sand sheet deposits | Qmlp - basalt flow of Lava Point |
| Qdl - Young linear dune deposits | Qslr - rhyolite dome complex of Slate Mountain |
| Qdp - Young parabolic dune deposits | Qwb - basalt flows of Woodhouse Mesa |
| Qdb - Young barchan dune deposits | QTI - intrusive dike or plug |
| Qg1 - Young terrace-gravel deposits | QTP - pyroclastic deposits |
| Qa1 - Young alluvial fan deposits | QTb - basalt flows |
| Qg2 - Intermediate terrace-gravel deposits | QTap - basalt and andesite pyroclastic deposits |
| Qa2 - Intermediate alluvial fan deposits | QTab - basalt and andesite flows |
| Qps - Ponded sediments | Tbi - dike in amphitheater |
| Qae - Young mixed alluvium and eolian deposits | Tp - pyroclastic deposits |
| Qdc - Eolian cinder dune deposits | Tb - basalt flows |
| Qsc - Eolian cinder sand sheet deposits | Tbpb - Black Point Basalt |
| Qtr - Talus and rock fall deposits | ToCb - basalt flow of Cedar Ranch Mesa |
| Ql - Landslide deposits | Ts - Old stream-channel deposits |
| Qv - Valley-fill deposits | Km - Mancos Shale |
| Qg3 - Old terrace-gravel deposits | Kd - Dakota Sandstone |
| Qa3 - Old alluvial fan deposits | Je - Entrada and Cow Springs Sandstone, undivided |
| QTD - Old dune deposits, undivided | Jn - Navajo Sandstone |
| QTDl - Old linear dune deposits | Jkn - Kayenta Formation - Navajo Sandstone transition zone |
| QTDp - Old parabolic dune deposits | Jk - Kayenta Formation |
| QTES - Old eolian sand sheet and dune deposits | Jm - Moenave Formation |
| QTae - Old mixed alluvium and eolian deposits | TRco - Chinle Formation, Owl Rock Member |
| QTg4 - Older terrace-gravel deposits | TRcp - Chinle Formation, Petrified Forest Member |
| QTA - Older alluvial fan deposits | TRcs - Chinle Formation, Shinarump Member & sandstone and siltstone |
| QTg5 - Oldest terrace-gravel deposits | TRm - Moenkopi Formation, undivided |
| Qmcb - basalt flow of Merriam Crater | TRmhm - Moenkopi Formation, Holbrook and Moqui Members, undivided |
| Qyap - basaltic pyroclastic deposits of SP Mountain | TRmss - Moenkopi Formation, Shnabkaib Member & lower massive sandstone |
| Qyab - basaltic andesite of SP Mountain | TRmw - Moenkopi Formation, Wupatki Member |
| Qyp - pyroclastic deposits of five young cinder cones | Pk - Kaibab Formation, undivided |
| Qyb - basalt flow of five young cinder cones | Pkh - Kaibab Formation, Harrisburg Member |
| Qsp - pyroclastic deposits of Shadow Mountain | Pkf - Kaibab Formation, Fossil Mountain Member |
| Qsb - basalt flows of Shadow Mountain | Pt - Toroweap Formation, undivided |
| Qp - pyroclastic deposits | Pc - Coconino Sandstone and Schnebley Hill Formation, undivided |
| Qb - basalt flows | Ph - Hermit Formation |
| Qbt - basalt flow of Tappan Wash | Pe - Supai Group, Esplanade Sandstone |
| Qbf - fissure deposits of Lockett Tank | PNMs - Supai Group, undivided |
| Qbmp - pyroclastic deposits | Mr - Redwall Limestone, undivided |
| Qbmb - basalt flows | Dtb - Temple Butte Formation |
| | Cm - Tonto Group, Muav Limestone |

- | | | |
|--|--|---|
| NPS Boundary
[Green outline symbol] | Open Fractures
—+— Open fracture with offset
—+— Open fracture without offset | Geologic Contacts
—— known or certain
----- concealed
----- inferred
—— map boundary |
| Roads
[Red line symbol] | Folds
—+— syncline, known or certain
- - - - - syncline, concealed
—+— monocline, known or certain
- - - - - monocline, concealed | |
| Hazard Point Features
▲ sinkhole | Faults
—+— normal fault, known or certain
- - - - - normal fault, concealed
- - - - - normal fault, inferred | |
| Geologic Point Features
● breccia pipe
● collapse structure | | |
| Volcanic Vents
* vent | | |
| Volcanic Line Features
—> basalt flow direction | | |

This figure is an overview of compiled digital geologic data. It is not a substitute for site-specific investigations.

Minor inaccuracies may exist regarding the location of geologic features relative to other geologic or geographic features on the figure. Based on the source map scale (1:100,000) and U.S. National Map Accuracy Standards, geologic features represented here are within 51 meters /167 feet (horizontally) of their true location.

This figure was prepared as part of the NPS Geologic Resources Division's Geologic Resources Inventory. The source maps used in creation of the digital geologic data product were:

Billingsley, G. H., S. S. Priest, and T. J. Felger, 2007. Geologic map of the Cameron 30' x 60' quadrangle, Coconino County, northern Arizona (scale 1:100,000). Scientific Investigations Map 2977. U.S. Geological Survey.

Billingsley, G. H., S. S. Priest, and T. J. Felger, 2007. Geologic map of Wupatki National Monument and vicinity, Coconino County, northern Arizona (scale 1:24,000). Scientific Investigations Map 2958. U.S. Geological Survey.

Digital geologic data and cross sections for Wupatki National Memorial, and all other digital geologic data prepared as part of the Geologic Resources Inventory, are available online at the NPS Natural Resource Information Portal: <https://nriinfo.nps.gov/Reference.mvc/Search>. (Enter "GRI" as the search text and select Wupatki National Memorial from the unit list.)

Map Unit Properties Table: Wupatki National Monument

Gray rows indicate map units that are not mapped within Wupatki National Monument. Additional units, not mapped in the vicinity of the monument, are included in the GIS data and further described in the wupa_geology.hlp file (see Attachment 1). Colors in the Unit Name column correspond to colors on the overview graphic. * = Hiking is prohibited in the backcountry in order to protect archeological sites.

Age	Unit Name (Symbol)	Features and Description	Erosion Resistance	Suitability for Infrastructure	Hazards	Paleontological Resources	Cultural Resources	Mineral and Potential Economic Resources	Caves and/or Karst	Habitat	Recreation*	Geologic Significance
QUATERNARY (Holocene)	Artificial fill and quarries (Qaf)	Excavated alluvium and bedrock material removed from bar-pits and trenches to build livestock tanks, drainage diversion dams, roads, and other construction projects (map does not include all highway road excavations). Includes uranium mine excavations, tailing deposits, and mine restoration sites in the Little Colorado River Valley area.	Variable.	Used as road base and for construction projects.	None.	None.	None.	Borrow pits (sand and gravel).	None.	Disturbed areas.	None. Sites of limited areal extent.	None.
	Stream-channel deposits (Qs)	Poorly sorted, lenses of silt, sand, pebbles, and gravel. Interlayered with young alluvial fan (Qa1), young terrace-gravel (Qg1), and upper part of valley-fill (Qv) deposits; overlaps flood-plain (Qf) and ponded sediment (Qps) deposits. Contacts are approximate with other alluvial deposits. Qs deposits of the Little Colorado River are mapped as shown on 1968 black and white aerial photographs and do not necessarily reflect stream-channel deposits of today due to extensive low-gradient channel changes caused by yearly flooding events. About 2 to 9 m (6 to 30 ft) thick.	Low.	Low. Flood-prone areas.	Stream channels subject to high-energy flows and flash floods.	Plant material and food waste from 22 packrat middens (see Tweet et al. 2009). Quaternary fossils, primarily bones of large mammals (see text) have been discovered in the monument area. Quaternary fossils have not been correlated with specific map units.	Possible early settler and American Indian artifacts transported by streams.	Sand and gravel.	None.	Sparse vegetation. Tamarisk (Salt Cedar), Russian olive, cotton-wood trees.	Crossed by road to Wukoki Pueblo.	Tributaries that provide sediment to the Little Colorado River.
	Flood-plain deposits (Qf)	Gray, brown, and light-red clay, silt, sand. Includes some lens-shaped gravel deposits. Partly consolidated by gypsum and calcite cement. Intertongue or overlap stream-channel (Qs), valley-fill (Qv), young terrace-gravel (Qg1), and young alluvial fan (Qa1) deposits. Similar to valley alluvial (Qv) deposits in small tributary drainage valleys that form broad, flat, valley floors subject to widespread and frequent overbank flooding along the Little Colorado River and in highland valleys west of Gray Mountain. Subject to temporary ponding and often mixed with ponded sediments (Qps) or young mixed alluvium and eolian deposits in broad drainage floodplains on the Coconino Plateau. Vegetation at higher elevations over 1,524 m (5,000 ft) help trap and accumulate fine-grained sediment on floodplains of Coconino Plateau. About 2 to 9 m (6 to 30 ft) thick.	Low. Subject to lateral and vertical erosion.	Low. Flood-prone areas.	Overbank flooding.		Borrow (gravel) pit.	None.	Tamarisk trees, sagebrush, tumble weed plants, desert shrubs, grass, cliffrose bush.	One outcrop of limited areal extent near the monument's eastern border. Crossed by secondary roads.	Traps sediment being transported to the Little Colorado River.	
	Dune sand and sand sheet deposits (Qd)	White, gray to light-red, fine- to coarse-grained sand composed mainly of quartz, chert, and minor feldspar grains derived from pre-existing Triassic and Jurassic sedimentary strata east of the Little Colorado River. Include topographically controlled climbing and falling dunes and sand sheets that mantle gentle slopes of bedrock at Ward Terrace and Red Rock Cliffs and within tributary drainages northeast and east of the Little Colorado River below Moenkopi Plateau (northeast of the monument). Sand that has been originally transported by fluvial erosion down tributary drainages from the southwestern edge of Moenkopi Plateau to the Little Colorado River is re-transported upstream by southwesterly winds onto Triassic and Jurassic bedrock surfaces forming significant deposits on Ward Terrace and against Red Rock Cliffs. Includes topographically controlled climbing and falling dunes, complex dunes, parabolic dunes, and barchan dunes. Arbitrary and gradational lateral and vertical contacts between other alluvial or eolian deposits. About 1 to 61 m (3 to 200 ft) thick.	Low, except where sand is stabilized by vegetation.	Low. Shifting sand. Underlying bedrock would provide any foundation.	None.	Potential for early settler and American Indian sites. About 2,400 sites have been found in the monument.	Sand and some gravel.	None.	Moderate growth of grass and high desert shrubs that stabilize extensive sand sheet and dune deposits on Moenkopi Plateau.	One exposure in the back-country, which is closed to hiking.	Unit records wind direction and sediment availability.	
	Young eolian sand sheet deposits (Qes)	White to gray, fine- to coarse-grained, windblown sand composed of quartz and chert grains derived from Qs. Form northeast and east of the Little Colorado River. Intertongue with Qae. Arbitrary and gradational lateral and vertical map contacts that intertongue with Qd and other surficial deposits. Thickness is 0.3 to 4.5 m (1 to 15 ft).	Low, except where sand is stabilized by vegetation.	Low. Flood prone areas and shifting sand.	None.	Unknown.	Potential for early settler and American Indian sites.	Quartz sand.	None.	Grass and small high-desert shrubs.	Not mapped in the monument.	Unit records wind direction and sediment availability.
	Young linear dune deposits (Qdl)	White, gray, and light-red, fine- to medium-grained, well sorted, unconsolidated quartz sand accumulation aligned in a general northeast direction. Associated with Qes northeast of the Little Colorado River. Generally 12 to 24.5 m (40 to 80 ft) in width and commonly less than 0.8 km (0.5 mi) in length, but dunes can reach to over 5 km (3 mi) in length northeast of map area on Moenkopi Plateau. Thickness: 2 to 6 m (6 to 20 ft).	Low.	Low. Limited areal extent and shifting sand.	None.	Unknown.	Limited potential. Linear feature that is easily eroded.	Quartz sand.	None.	Little or no vegetation.	Not mapped in the monument.	Unit records wind direction and sediment availability.
	Young barchans dune deposits (Qdb)	White, gray, light-red, fine- to coarse-grained, well-sorted quartz sand. Forms a barchan dune along a tributary northeast of the Little Colorado River. Arbitrary and gradational contacts (not dashed) with other eolian, alluvial, or bedrock deposits; subject to change on yearly basis due to seasonal storms. Thickness is 8 ft (2.4 m).	Low.	Very minor areal extent. Shifting sand.	None.	Unknown.	Limited potential. Sand dune is easily eroded.	Quartz sand.	None.	Little or no vegetation.	Not mapped in the monument.	Unit records wind direction and sediment availability.

Gray rows indicate map units that are not mapped within Wupatki National Monument. Additional units, not mapped in the vicinity of the monument, are included in the GIS data and further described in the wupa_geology.hlp file (see Attachment 1). Colors in the Unit Name column correspond to colors on the overview graphic. * = Hiking is prohibited in the backcountry in order to protect archeological sites.

Age	Unit Name (Symbol)	Features and Description	Erosion Resistance	Suitability for Infrastructure	Hazards	Paleontological Resources	Cultural Resources	Mineral and Potential Economic Resources	Caves and/or Karst	Habitat	Recreation*	Geologic Significance
QUATERNARY (Holocene)	Young terrace-gravel deposits (Qg1)	Light-brown, pale-red, and gray well-sorted, interbedded mud, silt, sand, pebbles, cobbles, and some boulders; partly consolidated by matrix of mud and sand cemented by calcium carbonate and gypsum. Composed mainly of subangular to well-rounded Paleozoic and Mesozoic sandstone, limestone, and chert clasts of local origin. Includes well-rounded clasts of quartzite, quartz, and assorted metamorphic crystalline rocks reworked from Tertiary conglomerates southeast and south of the monument. In south and southwest part of map area, unit includes well-rounded volcanic clasts derived from the San Francisco Volcanic Field. Locally overlaps Qa1, Qf, and Qv deposits. Contacts with adjacent alluvial and eolian deposits are approximate. Form terraced benches about 1 to 3.6 m (3 to 12 ft) above Qs deposits on Coconino Plateau and 1.5 to 2 m (4 to 6 ft) above the Little Colorado River channel and Qf deposits. Fill erosion channels cut into bedrock, Qa1, and Qf deposits. Thickness is 2 to 6 m (6 to 20 ft).	Low to moderate, depending on amount of consolidation. Subject to sheet wash erosion.	Very minor exposures of limited extent. Crossed by unimproved roads.	Subject to flash flooding.	Potential for Quaternary fossils in packrat middens.	Potential for early settler and American Indian sites. About 2,400 sites have been found in the monument.	Sand, gravel, and landscape boulders but only minor exposures in the monument.	None.	Little to no vegetation, mainly grass and some cottonwood trees along the Little Colorado River.	Backcountry exposures of minor areal extent.	Represents the most recent downcutting by tributaries in the Little Colorado River drainage network.
	Young alluvial fan deposits (Qa1)	West and southwest of the Little Colorado River: Gray-brown silt, sand, pebbles, cobbles, and boulders. Composed mainly of subangular to rounded limestone, chert, and sandstone clasts derived from Permian and Triassic strata of the Coconino Plateau area. Includes medium to small, subrounded to rounded pebbles and cobbles of basalt and andesite and pyroclastic fragments of the San Francisco Volcanic Field. Partly consolidated by gypsum and calcite cement. East and northeast of the Little Colorado River: Gray, light-brown, and light-red mud, silt, sand, as well as cobble and pebble clasts of chert, limestone, and sandstone. Overlapped by Qps, Qf, and Qd deposits. Intertongues with Qg1 and Qae deposits. Thickness is 1 to 6 m (3 to 20 ft).	Variable. Subject to extensive sheet-wash erosion and small arroyo erosion.	Crossed by Wupatki Park Road and unimproved roads. Monument headquarters buildings.	Potential flash flooding and debris flows.			Sand, gravel, and landscape boulders.	None.	In monument area: Light to moderate growth of sagebrush, cactus, juniper, and grass. Wupatki Spring.	Crossed by Wupatki Park Road, road to Wukoki Pueblo, and jeep trail.	Most recent fan-shaped deposit resulting from stream erosion and transportation of sediment.
QUATERNARY (Holocene and Pleistocene)	Intermediate terrace-gravel deposits (Qg2)	Southwest of the Little Colorado River: Gray and brown silt, sand, and gravel; unconsolidated. Lithologically similar to Qg1 deposits. Composed mainly of gray and brown siltstone and fine-grained sandstone matrix mixed with subangular to rounded pebbles and boulders of local Permian limestone and Triassic sandstone. Includes well-rounded basalt clasts derived from the San Francisco Volcanic Field. Locally intertongues with Qa1 and Qa2 deposits. Form terrace benches about 4.5 to 9 m (15 to 30 ft) above modern streambeds and about 1.5 to 6 m (5 to 20 ft) above Qg1 deposits. East and northeast of the Little Colorado River: Isolated deposits of gray and red silt, sand, and multi-colored, angular cherty fragments. Terrace benches 3 to 15 m (10 to 50 ft) above the modern Little Colorado River bed. Thickness is 2 to 30 m (6 to 100 ft).	Variable, depending on clast size and vegetation.	Low. One mesa with limited, flat topography near the eastern border; one outcrop of limited areal extent near Doney Fault. Both in backcountry.	None.	Plant material and food waste from 22 packrat middens (Tweet et al. 2009). Quaternary fossils, primarily bones of large mammals have been discovered in the monument area. Quaternary fossils have not been correlated with specific map units.	Potential for early settler and American Indian sites. About 2,400 sites have been found in the monument.	Sand and gravel, but limited exposures.	None.	Support minor growth of high desert shrubs and grass.	Primarily a backcountry mesa with no roads or trails.	Record a history of uplift and erosion in the monument area.
	Intermediate alluvial fan deposits (Qa2)	Lithologically similar to Qa1 deposits; partly cemented by calcite and gypsum, but surfaces are more gravelly and often cut by arroyos as much as 3 m (10 ft) deep southwest of the Little Colorado River area. Northeast of the Little Colorado River, surfaces are sandy and often covered by young sand sheet deposits too thin to show at map scale. Commonly overlapped by Qa1 deposits near the Little Colorado River area and intertongue or overlapped Qv, Qtr, and Qg1 and Qg2 deposits west and southwest of the Little Colorado River. Includes abundant subrounded to subangular basalt clasts in southwest quarter of the map area and abundant subangular chert clasts northeast of the Little Colorado River. Thickness is 2 to 15 m (6 to 50 ft).	Variable, depending on clast size and vegetation.	Crossed by Wupatki Park Road and unimproved roads. Would not provide solid footing for buildings.	None.			Gravel.	None.	Grass, cactus, and sagebrush, southwest of the Little Colorado River. Little to no vegetation northeast of the Little Colorado River.	Crossed by Wupatki Park Road, but primarily a backcountry unit.	Unit may help reconstruct the history of sediment erosion and transportation.
	Ponded sediments (Qps)	Gray to brown clay, silt, sand, and minor lenses of gravel; partly consolidated by calcite and or gypsum cement. Locally includes small chert, limestone, and sandstone fragments or pebbles. Similar to Qf deposits but occupy manmade or natural internal drainage depressions. Internal drainage basins and sinkholes in the western part of Wupatki National Monument and Coconino National Forest formed intermittent shallow freshwater ponds that were likely an important water source for early human inhabitants of this area. Thickness is 1.5 to 12 m (5 to 40 ft).	High. Unit occupies depressions.	Low. Crossed by roads near Box Canyon and Lomaki Pueblos, but near faults and sinkholes.	None.			None.	None.	Desiccation cracks often develop in dry, hardpan surfaces. Clay content restricts plant growth	Road to Box Canyon and Lomaki Pueblos.	Geologically insignificant deposits. Temporary water sources.
	Young mixed alluvium and eolian deposits (Qae)	Gray, light-red, and brown clay, silt, and fine- to coarse-grained sand interbedded with lenses of pebbly gravel. Includes white angular chert fragments locally derived from Permian strata on Coconino Plateau and white, gray, brown, and red chert fragments derived from the Chinle Formation east of the Little Colorado River. Interbedded sequence of thin-bedded, mixed mud, silt, sand, and gravel accumulated from both alluvial and eolian processes. Commonly occupies broad flatland or gently sloping topography downwind (northeast) of local drainage valleys. Thickness is 3 to 40 ft (1 to 12 m).	Variable. Sheet-wash erosion during wet conditions and often covered by Qd when dry.	Crossed by Wupatki Park Road and undeveloped roads but unit is unstable for buildings.	Potential sheet-wash flooding.			Coarse sand and gravel.	None.	Support light to moderate growth of grass, cactus, and high desert shrubs.	Crossed by Wupatki Park Road.	Record a combination of alluvial and eolian processes.

Gray rows indicate map units that are not mapped within Wupatki National Monument. Additional units, not mapped in the vicinity of the monument, are included in the GIS data and further described in the wupa_geology.hlp file (see Attachment 1). Colors in the Unit Name column correspond to colors on the overview graphic. * = Hiking is prohibited in the backcountry in order to protect archeological sites.

Age	Unit Name (Symbol)	Features and Description	Erosion Resistance	Suitability for Infrastructure	Hazards	Paleontological Resources	Cultural Resources	Mineral and Potential Economic Resources	Caves and/or Karst	Habitat	Recreation*	Geologic Significance
QUATERNARY (Holocene and Pleistocene)	Eolian cinder dune deposits (Qdc)	Black, gray, and red coarse-grained fragments of angular to subangular, glassy basaltic and andesitic cinders and scoria. Derived primarily from Sunset Crater eruption 16 km (10 mi) southwest of map area about 1,000 years ago. Includes pyroclastic deposits from other volcanic vents in the San Francisco Volcanic Field in west part of map area and near Doney Mountain. Pyroclastic fragments are commonly vesicular fallout deposits transported by southwesterly winds; particles accumulated against or downslope of local topographic obstructions such as basalt flows, steep-walled drainages, rock ledges, and fault scarps. Form extensive thin cover of eolian cinder deposits over all terrain in southwest part of map area. Cinder fragments become smaller and more rounded farther downwind (northeast) of eruptive centers. Thickness is 1.5 to 12 m (5 to 40 ft).	Low.	Low. Mostly deposited on steep slopes.	Unstable slopes.			Volcanic cinders.	None.	Little or no vegetation on relatively steep slopes of Woodhouse, West, and North Mesas.	Exposures adjacent to monument headquarters.	Deposits transported by southwesterly winds.
	Eolian cinder sand sheet deposits (Qsc)	Sand sheets composed of black, gray, and red coarse-grained fragments of angular to subangular, glassy, basaltic cinders and scoria. Similar to Qdc deposits but form extensive surface deposits of volcanic particles downwind (northeast) of eruptive centers in south part of the map area. Volcanic cinder fragments become smaller and more rounded farther downwind (northeast) of eruptive centers. Form discontinuous cinder ground cover over the south-central part of map area within and near the monument. Northeast of the monument, Qsc deposits are present as detected on aerial photos and in the field but are too discontinuous to show at map scale. Volcanic cinders are commonly mixed with quartz sand. Thickness is 0.3 to 1.5 m (1 to 5 ft).	Low.	Crossed by roads but unit is too thin to provide any stable footing for buildings.	None.			Volcanic cinders, but the unit is not very thick in the monument.	None.	Thin, surficial deposits. <i>Penstemon clutei</i> (Sunset Crater beardtongue) thrives on cinder fields.	Road to Box Canyon and Lomaki Pueblos.	Deposits transported by southwesterly winds.
	Talus and rock fall deposits (Qtr)	Brown, gray, slope-forming, unsorted mixture of mud, silt, sand, pebbles, cobbles, and large angular boulders. Forms talus debris slopes in steep-walled canyons near base of Doney Mountain Fault and below basalt flows near the monument's Visitor Center. Includes individual car- and house-size basalt boulders. Clasts are mostly angular and unsorted; partly cemented by calcium carbonate. Gradational and arbitrary contacts with Ql, Qa1 and Qa2, Qg1 and Qg2, and Qv deposits. Only thick or extensive deposits shown. Thickness is 1 to 7.5 m (3 to 25 ft).	Subject to extensive sheet-wash and arroyo erosion.	Low. Unstable deposits near steep slopes.	Subject to flash-flood debris flows.	Plant material and food waste from 22 packrat middens (see Tweet et al. 2009). Quaternary fossils, primarily bones of large mammals (see text) have been discovered in the monument area. Quaternary fossils have not been correlated with specific map units.	Potential for early settler and American Indian sites. About 2,400 sites have been found in the monument.	None. Composed of coarse rock debris.	None.	Supports little or no vegetation.	Backcountry exposures along the Black Point Monocline.	Unit records the process of canyon widening by cliff collapse.
	Landslide deposits (Ql)	Unconsolidated to partly consolidated masses of unsorted rock debris. Includes detached blocks that have rotated backward and slid down slope as loose masses of broken rock and deformed strata; talus and rockfall debris on lower slopes adjacent to and below landslide masses. Some landslide blocks may become unstable in wet conditions below edges of basalt flows south of the monument's Visitor Center. Gradational and arbitrary map contacts with Qa1, Qa2, Qg1, and Qg2 deposits. Thickness of landslides is 3 to 36 m (10 to 120 ft).	Subject to extensive sheet-wash and arroyo erosion.	Low. Unstable deposits near steep slopes.	Subject to flash-flood debris flows.			None. Composed of coarse rock debris.	None.	Supports little or no vegetation.	Backcountry exposures along the Black Point Monocline.	Unit is an example of dynamic equilibrium as unstable slopes tend to stabilize.
	Valley-fill deposits (Qv)	Gray and light-brown silt, sand, and lenses of gravel; partly consolidated by gypsum and calcite cement west and southwest of the Little Colorado River. Includes minor rounded clasts of limestone and sandstone, subrounded to angular chert, and subrounded to angular basalt southwest of the Little Colorado River. Intertongue with or overlapped by Qa1, Qa2, Qg1, and Qg2 deposits. Commonly reflects low energy and low-gradient shallow drainages. Thickness is 1 to 9 m (3 to 30 ft).	Low, except where cemented by gypsum and calcite.	Low. Crossed by roads in western Wupatki but subject to flooding.	Subject to sheet-wash flooding.			Sand and gravel.	None.	Ponding due to sagebrush, grass, cactus, and juniper trees in west half of map area.	Road to Citadel, Nalakihi, Box Canyon, and Lomaki Pueblos.	Unit records the process of how valleys fill with sediments.
	Old terrace-gravel deposits (Qg3)	Gray and light-brown silt, sand, pebbles, cobbles, and boulders composed primarily of local Permian and Triassic clasts; partly consolidated by calcite and gypsum cement; unsorted. Lithologically similar to Qg1 and Qg2 deposits, but includes abundant rounded volcanic clasts and some well-rounded quartzite clasts. Basalt clasts as much as 0.3 m (1 ft) in diameter; smaller basalt cobbles form desert pavement surface in southeast quarter of map area. Forms terraces about 3.7 to 12 m (12 to 40 ft) above modern streambeds; about 43 m (140 ft) above the Little Colorado River. Thickness is 0.6 to 6 m (2 to 20 ft).	Low where disturbed; higher where cemented and forming desert pavement.	Low. Forms two mesas and buttes in the backcountry of eastern Wupatki.	None.			Sand, gravel, and landscape boulders.	None.	Sagebrush, grass, cactus.	Backcountry mesas without roads or trails.	Record a history of uplift and erosion in the monument area.
	Old alluvial fan deposits (Qa3)	Gray and light-brown, silt, sand and gravel. Lithologically similar to Qa1 and Qa2 deposits, but unit extensively eroded by arroyos; partly consolidated by calcite and gypsum cement. Surface has thin calcrete soil that forms resistant rocky surface east of Doney Mountain Fault and Black Point Monocline. Thickness is 1.5 to 7.6 m (5 to 25 ft).	High. Surface has resistance from calcrete soil formation.	Low. Thin deposits of limited areal extent.	None.			None. Minor exposures at the base of the Black Point Monocline.	None.	Supports moderate growth of grass, sagebrush, and cactus.	Crossed by secondary roads in the back-country.	Landscape reconstruction and sediment transportation.

Gray rows indicate map units that are not mapped within Wupatki National Monument. Additional units, not mapped in the vicinity of the monument, are included in the GIS data and further described in the wupa_geology.hlp file (see Attachment 1). Colors in the Unit Name column correspond to colors on the overview graphic. * = Hiking is prohibited in the backcountry in order to protect archeological sites.

Age	Unit Name (Symbol)	Features and Description	Erosion Resistance	Suitability for Infrastructure	Hazards	Paleontological Resources	Cultural Resources	Mineral and Potential Economic Resources	Caves and/or Karst	Habitat	Recreation*	Geologic Significance		
QUATERNARY (Pleistocene)	VOLCANIC ROCKS OF THE SAN FRANCISCO VOLCANIC FIELD	Basalt flow of Merriam Crater (Qmcb)	Dark-gray alkali olivine basalt. Contains scattered phenocrysts of olivine, clinopyroxene, and rare plagioclase in groundmass of the same minerals plus opaque oxides. Basalt flow occupies valley of the Little Colorado River in northeast part of map area where the river flows over the basalt flow and forms a rapid called Black Falls. Downstream of Black Falls, the Little Colorado River flows adjacent to basalt flow where it had spread out onto Qs and Qf deposits of the Little Colorado River. Age: 19,600±1,200 years old. Thickness is 2 to 4 m (6 to 13 ft).	High.	Potential for good foundations, but limited areal extent along eastern border.	None. Back-country exposures.	If lava tubes exist in the unit, fossils may be in the caves.	If lava tubes exist in the unit, cultural artifacts may be in the caves.	Phenocrysts of clinopyroxene, olivine, and plagioclase.	Potential for lava tube (non-dissolution) caves.	Vegetation limited by lack of soil development.	Secondary road to Black Falls Crossing.	Originated from Merriam Crater, 17.5 km (11 mi) southeast of the monument.	
		Basalt flows (Qb)	Dark-gray and black porphyritic and aphyric, clinopyroxene-olivine and alkali-olivine basalt. Flows occur locally adjacent to present stream drainages; are moderately young in appearance; and are locally covered by thin alluvium, eolian sand, or airborne cinder deposits. Little dissected. Age dates in millions of years before present: 0.22±0.05, 0.46±0.05, 0.66±0.11, 0.74±0.08, and 0.77±0.04. Thickness is 1 to 20 m (3 to 65 ft).	High.	Good potential, but located in southwestern Wupatki's backcountry.	None. Back-country exposures.			Phenocrysts of clinopyroxene and olivine.		Juniper woodland is replacing grasslands.	Backcountry exposures. Minor secondary road.	Flowed into the monument area from the southwest.	
		Pumice of San Francisco Mountain (Qsfp)	White to light-gray, poorly sorted, massive bedding of rhyolite airfall pumice. Unit is matrix-free, except for locally reworked zone in upper 1 m (3 ft) of unit. Lapilli range from several millimeters to several centimeters in size, are colorless vesicular glass, and lack visible crystals. Contains xenoliths of greenschist and blue-gray dense rhyolite with feldspar and quartz phenocrysts. Overlies Qmb and is correlated with lower aphyric pumice deposits on San Francisco Mountain south of map area because of similarities in petrography, composition, and xenoliths. Age date: 0.80±0.11 million years old. Not mapped in the monument. Thickness is 3 to 5 m (10 to 15 ft).	High.				Unknown. Not mapped in the monument.					Deposits from the eruption of the San Francisco Mountain stratovolcano.	
		Basalt dike (Qmbi)	Dark-gray to black plagioclase basalt with abundant 1- to 3-cm (0.4 to 1.2 in) plagioclase lath-shaped phenocrysts in a groundmass of olivine, clinopyroxene, plagioclase, and magnetite. Contains baked xenoliths of sandstone of the Moenkopi Formation. Dike is 0.3 to 0.5 m (1 to 1.5 ft) wide.	High.	Low. Thin feature with limited areal extent.	None.	None.	Limited areal extent. Limited potential for cultural artifacts.	Plagioclase phenocrysts.	None.	Sparse vegetation (grasses, sagebrush, rabbitbrush) scattered between the volcanic rocks on Doney Mountain.	Adjacent to Wupatki Park Road, but limited extent.		Igneous intrusion.
		Pyroclastic deposits (Qmp)	Dark-gray to red-brown plagioclase, porphyritic basalt. Consists of granular groundmass of plagioclase, clinopyroxene, olivine, and magnetite. Scattered olivine and clinopyroxene phenocrysts may be present. Includes 5 small cones at south-central edge of map area and 17 fissure vents of Doney Mountain aligned with the strike of the Doney Mountain Fault. Cones are in early stage of erosion, slightly eroded, and gullied. Thickness is 1 to 92 m (3 to 300 ft).	High.	High. Crossed by Wupatki Park Road.	Potential rockfall on Doney Mountain.	None.	Limited potential for cultural artifacts.	Scattered phenocrysts of olivine and clinopyroxene.	None.		Doney Mountain Trail (1.6 km [1 mi] round-trip).		Cinder cone eruptions that parallel the Doney Mountain Fault.
		Basalt flows (Qmb)	Dark-gray plagioclase-aphyric and porphyritic basalt of similar composition to Qmp deposits. Weathers yellow or brown. Surfaces are subdued and slightly eroded and gullied. Age dates in millions of years before present: 0.83±0.04, 1.04±0.04, 1.20±0.05, and 1.38±1.01. Flows generally followed older drainages and now represent inverted topography above present drainages. Thickness is 4.5 to 48 m (15 to 160 ft).	High. Inverted topography.	Good potential, but limited areal extent in the monument.	None.			Plagioclase phenocrysts.	Arrowhead Sink (dissolution of underlying Permian limestone.)	Sparse vegetation.	Located near Wupatki Park Road in Doney Mountain Wash.		Flowed into the monument from the southwest.
		Basalt flow of Lava Point (Qmlp)	Dark-gray to black plagioclase basalt. Similar composition to Qmb basalt flows. Flowed north for several kilometers from an unknown source southwest of map area; similar to and adjacent to the Black Point Basalt (Tbpb). Age date: 1.01±0.13 million years ago. Thickness, 6 to 15 m (20 to 50 ft).	High.	Low. Only exposed in extreme north-west corner.	None.	If lava tubes exist in the unit, fossils may be in the caves.	If lava tubes exist in the unit, cultural artifacts may be in the caves.	Plagioclase phenocrysts.	Potential for lava tubes (non-dissolution) caves.	Exposed in far northwestern corner of the monument.	Backcountry exposure west of U.S. Highway 89.		Flowed from the southwest. Forms Lava Point.
		Basalt flows of Woodhouse Mesa (Qwb)	Dark-gray, alkali olivine basalt and minor alkali-rich-alumina basalt. Contain phenocrysts of olivine, clinopyroxene, and plagioclase in fine- to medium-grained matrix of same minerals. Age dates in millions of years before present: 0.786±0.14, 0.84±0.13, and 0.87±0.14. Form basalt-capped mesas southeast and south of Wupatki National Monument Visitor Center. Thickness is 2 to 15 m (6 to 50 ft).	High.	High. Caps the mesa southwest of the Visitor Center.	Potential rockfall at edge of mesa.			Scattered phenocrysts of clinopyroxene, olivine, and plagioclase.		Sparse vegetation.	Mesa south of monument headquarters. Access from outside park.		Flowed into the monument from the southwest.

Gray rows indicate map units that are not mapped within Wupatki National Monument. Additional units, not mapped in the vicinity of the monument, are included in the GIS data and further described in the wupa_geology.hlp file (see Attachment 1). Colors in the Unit Name column correspond to colors on the overview graphic. * = Hiking is prohibited in the backcountry in order to protect archeological sites.

Age	Unit Name (Symbol)	Features and Description	Erosion Resistance	Suitability for Infrastructure	Hazards	Paleontological Resources	Cultural Resources	Mineral and Potential Economic Resources	Caves and/or Karst	Habitat	Recreation*	Geologic Significance
QUAT. or NEOGENE	VOLCANIC ROCKS OF THE SAN FRANCISCO VOLCANIC FIELD	Basalt flows (QTb)	Dark-gray, yellow-brown to brown, aphyric and slightly porphyritic basalt and microporphyritic olivine basalt; surfaces mostly smooth, relatively flat, and undissected. Includes thin, interbedded pyroclastic deposits near pyroclastic cones. Thickest near flow margins and filled ancestral Deadman Wash drainage southwest of Wupatki National Monument Visitor Center. Thickness is 10 to 60 m (30 to 200 ft).	High.	Unknown. Not mapped in the monument.							Filled ancestral Deadman Wash drainage.
NEOGENE (Pliocene)		Black Point Basalt (Tbpb)	Dark-gray to black plagioclase-aphyric basalt; surface weathers smooth; locally dissected. Contains scattered to abundant tabular plagioclase phenocrysts up to 1 cm (0.4 in) in diameter. Forms two flow lobes in the map area: 1) Black Point lobe to the northwest, 2) lobe extending for 14 km (8.5 mi) in the western part of the monument. Sourced from the southwest. Basalt flowed down Little Colorado River tributary drainages that were eroded into the Moenkopi Formation 2.4 million years ago. Age: 2.43±0.32 million years old. Flows average about 12 m (40 ft) thick. Form inverted valleys on Coconino Plateau (named West Mesa, South Mesa, East Mesa, and North Mesa) in the western part of the monument. Thickness is 6 to 40 m (20 to 132 ft).	High. Originally deposited in valleys, unit now caps mesas (inverted topography).	High, but located mostly in western Wupatki's backcountry. Crossed by Wupatki Park Road and U.S. Highway 89.	Potential rockfall at edge of mesas.	If lava tubes exist in the unit, fossils may be in the caves.	Citadel and Nalakihi Pueblos. Other ruins on East Mesa, Middle Mesa, Magnetic Mesa, West Mesa and other locations in western Wupatki.	Plagioclase phenocrysts as large as 1 cm (0.4 in) in diameter.	Potential for lava tube (non-dissolution) caves.	Sparse vegetation. Juniper woodland replacing grasslands.	Trail to Citadel and Nalakihi Pueblos (0.8 km [0.5 mi] round-trip).
NEOGENE (Pliocene or Miocene)	Old stream-channel deposits (Ts)	Light-red, gray, and brown interbedded siltstone, sandstone, arkosic gravel, and lenticular conglomerate. Unsorted and partly consolidated deposits cover part of an incised meander channel of Antelope Wash west of Doney Mountain. Antelope Wash, an ancestral Deadman Wash drainage, was superimposed onto the Kaibab Formation west of the Doney Mountain Fault and onto the Moenkopi and Chinle Formations east of the Doney Mountain Fault. Pebbles and cobbles are well-rounded quartzite, chert, and minor clasts of granite and metamorphic rocks derived from older gravel deposits southwest of the monument. Includes abundant gray limestone clasts derived from the Kaibab Formation and red sandstone clasts derived from the Moenkopi Formation. Well-rounded quartzite clasts form a lag gravel deposit. The ancestral Deadman Wash (Antelope Wash) is likely Miocene age. Thickness is 0.6 to 3.6 m (1 to 12 ft).	Variable, depending on clast size and composition.	Low. Thin exposures of limited areal extent along the Black Point Monocline.	None.	Unknown.	Potential for American Indian and early settler sites.	Sand and gravel but exposures are limited to minor outcrops near the crest of the Black Point Monocline.	None.	Unknown.	Most of the exposures are located west of the Visitor Center, beyond the boundaries of the monument.	Oldest Little Colorado River terrace-gravel deposit in the area.
REGIONAL UNCONFORMITY (Approximately 195 million years of geologic history is missing from the monument's stratigraphic record.)												
TRIASSIC (Upper)	Chinle Formation	Petrified Forest Member (TRcp)	Purple, blue, light-red, red-purple, and gray-blue, slope-forming mudstone and siltstone and interbedded white, coarse-grained lenticular (lens-shaped) sandstone. Includes large erosional channel structures and large-scale low-angle trough crossbedding. Petrified logs and wood fragments common in white or yellow-white sandstone in lower part that may be within upper part of TRcs. Contact with TRcs marked at lithologic and topographic change from sloping multicolored mudstone of TRcp to coarse-grained, light-brown sandstone ledges of TRcs. Weathers into rounded hills or slopes with a rough, puffy, popcorn surface owing to swelling of clay content when wet. Thickness northeast of the monument, 122 to 153 m (400 to 500 ft). Thickness is 3 to 9 m (10 to 30 ft).	Low for a consolidated rock unit. Forms slopes.	Exposed northeast of the monument, east of the Little Colorado River, well beyond the boundaries of the monument.							Terrestrial depositional environments including stream, lake, and flood-plains.
		Shinarump Member (TRcs)	White, light-brown, and yellow-pink, cliff-forming, coarse-grained sandstone and conglomeratic sandstone. Includes low-angle crossbedded sandstone interbedded with purple, light-red, and blue poorly sorted siltstone and mudstone. Lithology is highly variable laterally but relatively homogeneous from a regional viewpoint; unit consists of about 75% sandstone, 20% conglomerate, and 5% mudstone. Pebbles are generally brown to light-colored, well-rounded quartzite and a black siliceous composition. Petrified logs and wood fragments common at some localities but generally scattered throughout unit. Some petrified wood and associated sandstone include uranium mineral deposits that were mined along the Little Colorado River Valley during the 1950's just north of the monument. Forms resistant caprock of Tse Lichii Point, northeast of the monument. Unconformable erosional contact with underlying red siltstone and sandstone of Moenkopi Formation. Thickness: 12 to 30 m (40 to 100 ft).	High. Forms cliffs.								Mined for uranium along the Little Colorado River in the 1950s. Open-pit mines have been abandoned and many have been reclaimed.

Gray rows indicate map units that are not mapped within Wupatki National Monument. Additional units, not mapped in the vicinity of the monument, are included in the GIS data and further described in the wupa_geology.hlp file (see Attachment 1). Colors in the Unit Name column correspond to colors on the overview graphic. * = Hiking is prohibited in the backcountry in order to protect archeological sites.

Age	Unit Name (Symbol)	Features and Description	Erosion Resistance	Suitability for Infrastructure	Hazards	Paleontological Resources	Cultural Resources	Mineral and Potential Economic Resources	Caves and/or Karst	Habitat	Recreation*	Geologic Significance	
REGIONAL UNCONFORMITY (Approximately 10 million years of geologic history is missing from the stratigraphic record.)													
TRIASSIC (Lower and Middle?)	Moenkopi Formation	Holbrook and Moqui Members, undivided (TRmhm)	Red-brown, slope-forming, alternating sequence of claystone, siltstone, and sandstone. Include large to medium-scale trough crossbedding and abundant cusp-type ripple marks that testify to fluvial origin. Fossil casts of reptile tracks are often preserved on bottom surfaces of sandstone beds. Include interbedded, thin-bedded limestone and lenses of conglomeratic sandstone, and some lenses, nodules, veins, and thin-bedded gypsum. Primary bedrock in eastern Wupatki. Thickness is 25 to 37 m (80 to 120 ft).	Low for a consolidated rock unit. Forms slopes.	Currently contains roads and Wukoki Pueblo trail. Exposed in backcountry.	None.	Within the monument: <i>Chirotherium</i> (reptile) tracks, amphibian swimming tracks, archosauriform-like trackway, tetrapod tracks, ammonite fragment, and plants.	Wukoki Pueblo. Potential for additional cultural sites.	None.	None.	Stone used for Sinagua culture pueblos. Sparse (sagebrush) vegetation.	Wukoki Pueblo Trail (0.8 km [0.5 mi] round-trip). Crossed by unimproved roads.	Sedimentary features suggest that the unit was deposited in a fluvial system.
		Shnabkaib Member and lower massive sandstone (TRmss)	Yellow-white and light-brown, cliff-forming, crossbedded, fine-grained, calcareous siltstone and sandstone. Consists of two or more sandstone beds that form prominent isolated mesas or flatiron ridges along the Black Point Monocline. Lowermost ledge-forming sandstone is the most widespread part of unit. Represents a tidal flat and continental lowland fluvial environment in the monument area. Thins in all directions from the monument and correlates to the Shnabkaib Member of the Moenkopi Formation in northwestern Arizona. Minor erosional contact with underlying TRmw marked at base of lowest sandstone cliff. Thickness is 15 m (50 ft).	Variable. Sandstone (high) forms cliffs; siltstone (low) forms slopes.	Low for backcountry exposures on steep slopes; crossed by loop road near the Visitor Center.	None.	Vertebrate body fossils and trace fossils outside of the monument are listed in Tweet and others (2009).	Crack-in-Rock Ruins and ruins at the base of Black Point Monocline and Doney Fault.	None.	None.	Vegetation that can grow in a dry climate from about 1,370 m (4,500 ft) to 1,430 m (4,700 ft).	Primarily backcountry exposures, closed to hiking. Crossed by a jeep trail that connects to the loop road.	Continued terrestrial deposition. Eolian deposits interbedded with ephemeral stream deposits.
		Wupatki Member (TRmw)	Red and red-brown, slope-forming, thin-bedded siltstone and sandstone and interbedded crumbly red-brown mudstone. Thin, flat sandstone beds (0.5 to 1 m [1 to 3 ft]) form resistant ledges within slopes. Bedding surfaces often contain small-scale ripple marks, salt crystal casts, or raindrop impressions. Unconformably overlies the Kaibab Formation and forms the regional Permian-Triassic boundary. Unit gradually thins southwest and southeast of the monument. Thickness is 6 to 10 m (20 to 35 ft).	Variable. Siltstone (low) forms slopes; few sandstone beds form ledges.	High in vicinity of Visitor Center. Crossed by roads and trails.	None.		Wupatki Pueblo. Crack-in-Rock Ruins and ruins at the base of Black Point Monocline and Doney Fault.	None.	None.	Sparse (sagebrush) vegetation. Contains Heiser and Peshlaki Springs.	Wupatki Ruin Trail (0.8 km [0.5 mi] round-trip. Wupatki blowhole.	Type locality is not designated, but unit is probably named for the monument.
REGIONAL UNCONFORMITY (Approximately 20 million years of geologic history is missing from the stratigraphic record.)													
PERMIAN (Cisuralian or "Lower")	Kaibab Formation	Harrisburg Member (Pkh)	Red-gray to brownish-gray, slope-forming gypsum, siltstone, sandstone, and thin-bedded limestone. Includes a yellowish-gray fossiliferous sandy limestone at the top that has been largely removed by erosion from parts of the region. Forms surface bedrock in central part of the monument. Contact with underlying Pkf is gradational and placed at topographic break between white-gray, slope- and ledge-forming sandy limestone and sandstone sequence of Pkh and cliff-forming white to light-brown, cherty limestone of Pkf. Unit gradually thins from west to east and undergoes a shoreward (eastward) lithologic change from limestone and sandy limestone to calcareous sandstone and sandstone. Thickness is 25 to 37 m (80 to 120 ft).	Less resistant than underlying limestone and sandstone of Pkf.	Potential for stable foundations, but exposed in monument's backcountry. Crossed by Wupatki Park Road.	None. Exposed as relatively flat tableland in central Wupatki.	Scattered, rare mollusks (<i>Bellerophon</i>) in calcareous sandstone.	Box Canyon and Lomaki Pueblos. Other ruins on the tableland in the central part of the monument.	None.	Dissolution caves and karst topography (sinks and sinkholes). Citadel Sink.	High elevation (above 1,585 m [5,200 ft]) juniper woodlands.	Box Canyon and Lomaki Trails (0.8 km [0.5 mi] round-trip. Wupatki Park and secondary roads. Jeep trails.	Formation records the westward regression of the Kaibab Sea.
		Fossil Mountain Member (Pkf)	Light-gray, cliff-forming, fine- to medium-grained, thin- to medium-bedded (0.3 to 2 m [1 to 6 ft]), fossiliferous, cherty, sandy limestone and minor dolomite. Weathers dark gray or brown, often stained by black magnesium oxide. Characterized by gray to white fossiliferous chert nodules and chert breccias. Chert breccia beds are less than 1 m (3 ft) thick and commonly mark uppermost part of Pkf in west half of the monument area. Gradually thins from west to east and undergoes a shoreward (eastward) lithologic change from sandy limestone to calcareous sandstone, similar in texture, composition, and appearance to Pkh. Typically forms cliff or series of ledges along Doney Mountain Fault overlain by ledges of sandy limestone and sandstone of Pkh. Unconformable contact with underlying Toroweap Formation (Pt) attributed mostly to shallow channel erosion; average erosional relief, about 3 m (10 ft). Thickness is 55 m (180 ft).	High. Forms cliffs and ledges.	Low. Cliffs in Antelope Wash and other washes that cut the Black Point Monocline.	Potential rockfall.	Invertebrate marine fossils: Brachiopods, trilobites, crinoids from sandy limestones; sponge spicules and bryozoans from chert nodules and chert beds. Abundant invertebrate fossils and shark teeth in the Kaibab Formation outside of the monument's boundaries.	Exposures limited to cliffs and canyons carved through the Black Point Monocline. May contain undiscovered artifacts crafted from chert.	Chert.	Subsurface dissolution of Pkf and Pkh limestone has enlarged the fracture system that supports the blowholes and expands the sinkholes in the monument.	Cliff former.	Backcountry exposures.	Formation documents the eastward transgression of marine environments into the Wupatki National Monument area.

Gray rows indicate map units that are not mapped within Wupatki National Monument. Additional units, not mapped in the vicinity of the monument, are included in the GIS data and further described in the wupa_geology.hlp file (see Attachment 1). Colors in the Unit Name column correspond to colors on the overview graphic. * = Hiking is prohibited in the backcountry in order to protect archeological sites.

Age	Unit Name (Symbol)	Features and Description	Erosion Resistance	Suitability for Infrastructure	Hazards	Paleontological Resources	Cultural Resources	Mineral and Potential Economic Resources	Caves and/or Karst	Habitat	Recreation*	Geologic Significance
PERMIAN (Cisuralian or "Lower")	Toroweap Formation (Pt)	Includes, in descending order, Woods Ranch, Brady Canyon, and Seligman Members, undivided. All three members are present at Grand Canyon National Park, but all three members undergo a rapid shoreward (eastward and southeastward) lithologic change from the Grand Canyon to Wupatki National Monument to form a white, low-angle, crossbedded sandstone cliff unit in Citadel Wash and Antelope Wash along Doney Mountain Fault. Gradually thins southeast of the monument in the subsurface where drill holes near Leupp, Arizona, indicate that only 6 to 9 m (20 to 30 ft) of Pt is present in that area. In the subsurface, on the basis of exposures west of Cameron, Arizona, Pt has a sharp unconformable contact with the underlying Coconino Sandstone, a high-angle, crossbedded sandstone. Dunes of the Coconino Sandstone were beveled off by marine wave erosion and sand was redistributed as flat-bedded or low-angle crossbedded sandstone within the lower part of Pt. Thickness northwest to southeast, 24 to 9 m (80 to 30 ft).	High. Forms cliff.	Low. Cliffs in Antelope Wash canyon; limited areal extent.	Potential rockfall.	Limited exposures in the monument. No fossils in the park, but includes corals, brachiopods, crinoids and other invertebrates outside the monument.	Exposures limited to cliffs and canyons carved through the Black Point Monocline. May contain undiscovered artifacts.	None.	Unknown. Cliff collapse may lead to alcove formation.	Cliff former.	Backcountry exposures.	Records the initial advance of marine environments into the monument area following deposition of a sand sea (erg) represented by the underlying Coconino Sandstone.

Map references:

Billingsley, G.H., S.S. Priest, and T.J. Felger. 2007A. Geologic map of Wupatki National Monument and vicinity, Coconino County, northern Arizona. U. S. Geological Survey Scientific Investigations Map 2958 (scale 1:24,000).
 Billingsley, G.H., S.S. Priest, and T.J. Felger. 2007B. Geologic map of the Cameron 30' x 60' quadrangle, Coconino County, northern Arizona. U. S. Geological Survey Scientific Investigations Map 2977 (scale 1:100,000).

Glossary

This glossary contains brief definitions of technical geologic terms used in this report. Not all geologic terms used are referenced. For more detailed definitions or to find terms not listed here please visit: <http://geomaps.wr.usgs.gov/parks/misc/glossarya.html>. Definitions are based on those in the American Geological Institute Glossary of Geology (fifth edition; 2005).

- absolute age.** The geologic age of a fossil, rock, feature, or event in years; commonly refers to radiometrically determined ages.
- abyssal plain.** A flat region of the deep ocean floor, usually at the base of the continental rise.
- accretion.** The gradual addition of new land to old by the deposition of sediment or emplacement of landmasses onto the edge of a continent at a convergent margin.
- active margin.** A tectonically active margin where lithospheric plates come together (convergent boundary), pull apart (divergent boundary) or slide past one another (transform boundary). Typically associated with earthquakes and, in the case of convergent and divergent boundaries, volcanism. Compare to “passive margin.”
- alluvial fan.** A fan-shaped deposit of sediment that accumulates where a hydraulically confined stream flows to a hydraulically unconfined area. Commonly out of a mountainous area into an area such as a valley or plain.
- alluvium.** Stream-deposited sediment.
- amphibole.** A common group of rock-forming silicate minerals. Hornblende is the most abundant type.
- aphyric.** Describes the texture of fine-grained or aphanitic igneous rocks that lack coarse (large) crystals.
- aquifer.** A rock or sedimentary unit that is sufficiently porous that it has a capacity to hold water, sufficiently permeable to allow water to move through it, and currently saturated to some level.
- arc.** See “volcanic arc” and “magmatic arc.”
- arenite.** A general term for sedimentary rocks composed of sand-sized fragments with a pure or nearly pure chemical cement and little or no matrix material between the fragments.
- arkose.** A sandstone with abundant feldspar minerals, commonly coarse-grained and pink or reddish.
- arroyo.** A small, deep, flat-floored channel or gully of an ephemeral or intermittent stream in the arid and semiarid regions of the southwestern United States.
- ash (volcanic).** Fine material ejected from a volcano (also see “tuff”).
- asthenosphere.** Earth’s relatively weak layer or shell below the rigid lithosphere.
- barchan dune.** A crescent-shaped dune with arms or horns of the crescent pointing downwind. The crescent or barchan type is most characteristic of inland desert regions.
- basalt.** A dark-colored, often low-viscosity, extrusive igneous rock.
- basement.** The undifferentiated rocks, commonly igneous and metamorphic, that underlie rocks exposed at the surface.
- basin (structural).** A doubly plunging syncline in which rocks dip inward from all sides.
- basin (sedimentary).** Any depression, from continental to local scales, into which sediments are deposited.
- bed.** The smallest sedimentary strata unit, commonly ranging in thickness from one centimeter to a meter or two and distinguishable from beds above and below.
- bedding.** Depositional layering or stratification of sediments.
- bedrock.** A general term for the rock that underlies soil or other unconsolidated, surficial material.
- block (fault).** A crustal unit bounded by faults, either completely or in part.
- breccia.** A coarse-grained, generally unsorted sedimentary rock consisting of cemented angular clasts greater than 2 mm (0.08 in).
- calcareous.** Describes rock or sediment that contains the mineral calcium carbonate (CaCO₃).
- calcite.** A common rock-forming mineral: CaCO₃ (calcium carbonate).
- calcrete.** Pedogenic calcareous soil, e.g., limestone consisting of surficial sand and gravel cemented into a hard mass by calcium carbonate precipitated from solution.
- caldera.** A large bowl- or cone-shaped depression at the summit of a volcano. Formed by explosion or collapse.
- carbonaceous.** Describes a rock or sediment with considerable carbon content, especially organics, hydrocarbons, or coal.
- carbonate.** A mineral that has CO₃²⁻ as its essential component (e.g., calcite and aragonite).
- carbonate rock.** A rock consisting chiefly of carbonate minerals (e.g., limestone, dolomite, or carbonatite).
- cementation.** Chemical precipitation of material into pores between grains that bind the grains into rock.
- chemical sediment.** A sediment precipitated directly from solution (also called nonclastic).
- chemical weathering.** Chemical breakdown of minerals at Earth’s surface via reaction with water, air, or dissolved substances; commonly results in a change in chemical composition so as to become more stable in the current environment.
- chert.** An extremely hard sedimentary rock with conchoidal (smooth curved surface) fracturing. It consists chiefly of interlocking crystals of quartz. Also called “flint.”
- cinder cone.** A conical volcanic feature formed by the accumulation of cinders and other pyroclasts, normally of basaltic or andesitic composition.

- clast.** An individual grain or rock fragment in a sedimentary rock, produced by the physical disintegration of a larger rock mass.
- clastic.** Describes rock or sediment made of fragments of pre-existing rocks (clasts).
- clay.** Can be used to refer to clay minerals or as a sedimentary fragment size classification (less than 1/256 mm [0.00015 in]).
- claystone.** Lithified clay having the texture and composition of shale but lacking shale's fine layering and fissility (characteristic splitting into thin layers).
- clinopyroxene.** A group name for pyroxene minerals crystallizing in the monoclinic system. Important rock-forming minerals; common in igneous and metamorphic rocks.
- conglomerate.** A coarse-grained, generally unsorted, sedimentary rock consisting of cemented, rounded clasts larger than 2 mm (0.08 in).
- continental crust.** Crustal rocks rich in silica and alumina that underlie the continents; ranging in thickness from 35 km (22 mi) to 60 km (37 mi) under mountain ranges.
- continental rise.** Gently sloping region from the foot of the continental slope to the deep ocean abyssal plain; it generally has smooth topography but may have submarine canyons.
- continental shelf.** The shallowly submerged part of a continental margin extending from the shoreline to the continental slope with water depths less than 200 m (660 ft).
- continental slope.** The relatively steep slope from the outer edge of the continental shelf down to the more gently sloping ocean depths of the continental rise or abyssal plain.
- convergent boundary.** A plate boundary where two tectonic plates are colliding.
- cordillera.** A Spanish term for an extensive mountain range; used in North America to refer to all of the western mountain ranges of the continent.
- core.** The central part of Earth, beginning at a depth of about 2,900 km (1,800 mi), probably consisting of iron-nickel alloy.
- country rock.** The rock surrounding an igneous intrusion or pluton. Also, the rock enclosing or traversed by a mineral deposit.
- craton.** The relatively old and geologically stable interior of a continent (also see "continental shield").
- crinoid.** A marine invertebrate (echinoderm) that uses a stalk to attach itself to a substrate. "Arms" are used to capture food. Rare today, they were very common in the Paleozoic. Crinoids are also called "sea lilies."
- cross-bedding.** Uniform to highly varied sets of inclined sedimentary beds deposited by wind or water that indicate flow conditions such as water flow direction and depth.
- cross section.** A graphical interpretation of geology, structure, and/or stratigraphy in the third (vertical) dimension based on mapped and measured geological extents and attitudes depicted in a vertically oriented plane.
- crust.** Earth's outermost compositional shell, 10 to 40 km (6 to 25 mi) thick, consisting predominantly of relatively low-density silicate minerals (also see "oceanic crust" and "continental crust").
- cryptocrystalline.** Describes a rock texture where individual crystals are too small to be recognized and separately distinguished with an ordinary microscope.
- crystalline.** Describes a regular, orderly, repeating geometric structural arrangement of atoms.
- crystal structure.** The orderly and repeated arrangement of atoms in a crystal.
- cutbank.** A local term in the western U.S. for a steep bare slope formed by lateral erosion of a stream.
- deformation.** A general term for the processes of faulting, folding, and shearing of rocks as a result of various Earth forces such as compression (pushing together) and extension (pulling apart).
- differential erosion.** Erosion that occurs at irregular or varying rates, caused by differences in the resistance and hardness of surface material.
- dike.** A narrow igneous intrusion that cuts across bedding planes or other geologic structures.
- dip.** The angle between a bed or other geologic surface and horizontal.
- dip-slip fault.** A fault with measurable offset where the relative movement is parallel to the dip of the fault.
- divergent boundary.** An active boundary where tectonic plates are moving apart (e.g., a spreading ridge or continental rift zone).
- dolomite.** A carbonate sedimentary rock of which more than 50% by weight or by areal percentages under the microscope consists of the mineral dolomite (calcium-magnesium carbonate).
- dolomitic.** Describes a dolomite-bearing rock, or a rock containing dolomite.
- downcutting.** Stream erosion process in which the cutting is directed in primarily downward, as opposed to lateral erosion.
- drainage basin.** The total area from which a stream system receives or drains precipitation runoff.
- dune.** A low mound or ridge of sediment, usually sand, deposited by wind. Common dune types include "barchan," "longitudinal," "parabolic," and "transverse" (see respective listings).
- eolian.** Describes materials formed, eroded, or deposited by or related to the action of the wind. Also spelled "aeolian."
- ephemeral stream.** A stream that flows briefly only in direct response to precipitation in the immediate locality and whose channel is at all times above the water table.
- epicenter.** The point on Earth's surface that is directly above the focus (location) of an earthquake.
- epicontinental.** Describes a geologic feature situated on the continental shelf or on the continental interior. An "epicontinental sea" is one example.
- erg.** An regionally extensive tract of sandy desert; a "sand sea."
- evaporite.** A sedimentary rock composed primarily of minerals produced from a saline solution as a result of extensive or total evaporation of the solvent (usually water).
- extension.** A type of strain resulting from forces "pulling apart." Opposite of compression.

extrusive. Describes molten (igneous) material that has erupted onto Earth's surface.

fault. A break in rock along which relative movement has occurred between the two sides.

feldspar. A group of abundant (more than 60% of Earth's crust), light-colored to translucent silicate minerals found in all types of rocks. Usually white and gray to pink. May contain potassium, sodium, calcium, barium, rubidium, and strontium along with aluminum, silica, and oxygen.

flat slab subduction. Refers to a tectonic plate being subducted beneath another tectonic plate at a relatively shallow angle.

floodplain. The surface or strip of relatively smooth land adjacent to a river channel and formed by the river. Covered with water when the river overflows its banks.

fold. A curve or bend of an originally flat or planar structure such as rock strata, bedding planes, or foliation that is usually a product of deformation.

footwall. The mass of rock beneath a fault surface (also see "hanging wall").

formation. Fundamental rock-stratigraphic unit that is mappable, lithologically distinct from adjoining strata, and has definable upper and lower contacts.

fracture. Irregular breakage of a mineral; also any break in a rock (e.g., crack, joint, or fault).

granite. An intrusive igneous (plutonic) rock composed primarily of quartz and feldspar. Mica and amphibole minerals are also common. Intrusive equivalent of rhyolite.

graben. A down-dropped structural block bounded by steeply dipping, normal faults (also see "horst").

greenschist. A metamorphic rock, whose green color is due to the presence of the minerals chlorite, epidote, or actinolite, corresponds with metamorphism at temperatures in the 300–500°C (570–930°F) range.

groundmass. The material between the large crystals in a porphyritic igneous rock. Can also refer to the matrix of a sedimentary rock.

gypsum. The most common sulfate mineral (calcium sulfate). Frequently associated with halite and anhydrite in evaporites.

hanging wall. The mass of rock above a fault surface (also see "footwall").

hornblende. The most common mineral of the amphibole group. Hornblende is commonly black and occurs in distinct crystals or in columnar, fibrous, or granular forms.

horst. Areas of relative "up" between grabens, representing the geologic surface left behind as grabens drop. The best example is the Basin-and-Range province of Nevada. The basins are grabens and the ranges are weathered horsts. Grabens become a locus for sedimentary deposition (also see "graben").

igneous. Refers to a rock or mineral that originated from molten material; one of the three main classes of rocks—igneous, metamorphic, and sedimentary.

incision. The process whereby a downward-eroding stream deepens its channel or produces a narrow, steep-walled valley.

intrusion. A body of igneous rock that invades (pushes into) older rock. The invading rock may be a plastic solid or magma.

island arc. A line or arc of volcanic islands formed over and parallel to a subduction zone.

isotopic age. An age expressed in years and calculated from the quantitative determination of radioactive elements and their decay products; "absolute age" and "radiometric age" are often used in place of isotopic age but are less precise terms.

joint. A break in rock without relative movement of rocks on either side of the fracture surface.

karst topography. Topography characterized by abundant sinkholes and caverns formed by the dissolution of calcareous rocks.

lag gravel. An accumulation of coarse material remaining on a surface after the finer material has been blown away by winds.

lamination. Very thin, parallel layers.

landslide. Any process or landform resulting from rapid, gravity-driven mass movement.

lapilli. Pyroclastics in the general size range of 2 to 64 mm (0.08 to 2.5 in.).

lava. Still-molten or solidified magma that has been extruded onto Earth's surface through a volcano or fissure.

lens. A sedimentary deposit characterized by converging surfaces, thick in the middle and thinning out toward the edges, resembling a convex lens.

limb. Either side of a structural fold.

limestone. A sedimentary rock consisting chiefly of calcium carbonate, primarily in the form of the mineral calcite.

lineament. Any relatively straight surface feature that can be identified via observation, mapping, or remote sensing, often reflects crustal structure.

lithification. The conversion of a newly deposited, unconsolidated sediment into a coherent, solid rock, involving processes such as cementation, compaction, desiccation, crystallization. It may occur concurrent with, soon after, or long after deposition.

lithology. The physical description or classification of a rock or rock unit based on characters such as its color, mineral composition, and grain size.

lithosphere. The relatively rigid outermost shell of Earth's structure, 50 to 100 km (31 to 62 miles) thick, that encompasses the crust and uppermost mantle.

longitudinal dune. Dune elongated parallel to the direction of wind flow.

magma. Molten rock beneath Earth's surface capable of intrusion and extrusion.

magma reservoir. A chamber in the shallow part of the lithosphere from which volcanic materials are derived; the magma has ascended from a deeper source.

magmatic arc. Zone of plutons or volcanic rocks formed at a convergent boundary.

mantle. The zone of Earth's interior between the crust and core.

mass wasting. A general term for the downslope movement of soil and rock material under the direct influence of gravity.

matrix. The fine grained material between coarse (larger) grains in igneous rocks or poorly sorted clastic sediments or rocks. Also refers to rock or sediment in which a fossil is embedded.

meander. Sinuous lateral curve or bend in a stream channel. An entrenched meander is incised, or carved downward into the surface of the valley in which a meander originally formed. The meander preserves its original pattern with little modification.

mechanical weathering. The physical breakup of rocks without change in composition. Synonymous with “physical weathering.”

member. A lithostratigraphic unit with definable contacts; a member subdivides a formation.

mesa. A broad, flat-topped erosional hill or mountain bounded by steeply sloping sides or cliffs.

metamorphic. Describes the process of metamorphism or its results. One of the three main classes of rocks—igneous, metamorphic, and sedimentary.

mica. A prominent rock-forming mineral of igneous and metamorphic rocks. It has perfect basal cleavage, meaning that it forms flat sheets.

microcrystalline. A rock with a texture consisting of crystals only visible with a microscope.

mineral. A naturally occurring, inorganic crystalline solid with a definite chemical composition or compositional range.

monocline. A one-limbed fold in strata that is otherwise flat-lying.

monument. An isolated pinnacle, column, or pillar of rock resulting from erosion and resembling an anthropogenic monument or obelisk.

mud cracks. Cracks formed in clay, silt, or mud by shrinkage during dehydration at Earth’s surface.

muscovite. A mineral of the mica group. It is colorless to pale brown and is a common mineral in metamorphic rocks such as gneiss and schist, igneous rocks such as granite, pegmatite, and sedimentary rocks such as sandstone.

normal fault. A dip-slip fault in which the hanging wall moves down relative to the footwall.

oceanic crust. Earth’s crust formed at spreading ridges that underlies the ocean basins. Oceanic crust is 6 to 7 km (3 to 4 miles) thick and generally of basaltic composition.

oil field. A geographic region rich in petroleum resources and containing one or more wells that produce, or have produced, oil and/or gas.

olivine. An olive-green mineral rich in iron, magnesium, and manganese that is commonly found in low-silica (basaltic) igneous rocks.

orogeny. A mountain-building event.

outcrop. Any part of a rock mass or formation that is exposed or “crops out” at Earth’s surface.

paleogeography. The study, description, and reconstruction of the physical landscape from past geologic periods.

paleontology. The study of the life and chronology of Earth’s geologic past based on the fossil record.

Pangaea. A theoretical, single supercontinent that existed during the Permian and Triassic periods.

parabolic dune. Crescent-shaped dune with horns or arms that point upwind.

parent material. Geologic material from which soils form.

parent rock. Rock from which soil, sediments, or other rocks are derived.

passive margin. A margin where no plate-scale tectonism is taking place; plates are not converging, diverging, or sliding past one another. An example is the east coast of North America (compare to “active margin”).

pebble. Generally, small rounded rock particles from 4 to 64 mm (0.16 to 2.52 in) in diameter.

pediment. A gently sloping, erosional bedrock surface at the foot of mountains or plateau escarpments.

permeability. A measure of the relative ease with which fluids move through the pore spaces of rocks or sediments.

phenocryst. A coarse (large) crystal in a porphyritic igneous rock.

plagioclase. A feldspar mineral containing various proportions of sodium and calcium. A common rock-forming mineral.

plastic. Capable of being deformed permanently without rupture.

plate tectonics. The concept that the lithosphere is broken up into a series of rigid plates that move over Earth’s surface above a more fluid asthenosphere.

plateau. A broad, flat-topped topographic high (terrestrial or marine) of great extent and elevation above the surrounding plains, canyons, or valleys.

pluton (plutonic). A body of intrusive igneous rock that crystallized at some depth beneath Earth’s surface.

porosity. The proportion of void space (e.g., pores or voids) in a volume of rock or sediment deposit.

porphyry. An igneous rock consisting of abundant coarse crystals in a fine-grained matrix.

porphyritic. Describes an igneous rock wherein the rock contains conspicuously large crystals in a fine-grained groundmass.

potassium feldspar. A feldspar mineral rich in potassium (e.g., orthoclase, microcline, sanidine, adularia).

pumice. Solidified “frothy” lava. It is highly vesicular and has very low density.

pumiceous. Volcanic vesicular texture involving tiny gas holes such as in pumice. Finer than scoriaceous.

pyroclast. An individual particle ejected during a volcanic eruption.

pyroclastic. Describes clastic rock material formed by volcanic explosion or aerial expulsion from a volcanic vent; also pertaining to rock texture of explosive origin. In the plural, the term is used as a noun.

pyroxene. A common rock-forming mineral. It is characterized by short, stout crystals.

quartzite. Metamorphosed quartz sandstone.

radioactivity. The spontaneous decay or breakdown of unstable atomic nuclei.

radiometric age. An age expressed in years and calculated from the quantitative determination of radioactive elements and their decay products.

recharge. Infiltration processes that replenish groundwater.

- red beds.** Sedimentary strata composed largely of sandstone, siltstone, and shale that are predominantly red due to the presence of ferric iron oxide (hematite) coating individual grains.
- regression.** A long-term seaward retreat of the shoreline or relative fall of sea level.
- relative dating.** Determining the chronological placement of rocks, events, or fossils with respect to the geologic time scale and without reference to their numerical age.
- reverse fault.** A contractional high-angle (greater than 45°) dip-slip fault in which the hanging wall moves up relative to the footwall (also see “thrust fault”).
- rhyolite.** A group of extrusive volcanic rocks, typically porphyritic and commonly exhibiting flow texture, with phenocrysts of quartz and alkali feldspar in a glassy to cryptocrystalline groundmass. The fine-grained extrusive equivalent of granite.
- rift.** A region of crust where extension results in formation of many related normal faults, often associated with volcanic activity.
- ripple marks.** The undulating, approximately parallel and usually small-scale ridge pattern formed on sediment by the flow of wind or water.
- rock.** A solid, cohesive aggregate of one or more minerals.
- rock fall.** Mass wasting process where rocks are dislodged and move downslope rapidly; it is the fastest mass wasting process.
- roundness.** The relative amount of curvature of the “corners” of a sediment grain.
- sabkha.** A coastal environment in an arid climate just above high tide. Characterized by evaporate minerals, tidal-flood, and eolian deposits. Common in the Persian Gulf.
- sand.** A clastic particle smaller than a granule and larger than a silt grain, having a diameter in the range of 1/16 mm (0.0025 in) to 2 mm (0.08 in).
- sand sheet.** A large irregularly shaped plain of eolian sand, lacking the discernible slip faces that are common on dunes.
- sandstone.** Clastic sedimentary rock of predominantly sand-sized grains.
- schist.** A strongly foliated metamorphic rock that can be readily be split into thick flakes or slabs. Micas are arranged in parallel, imparting a distinctive sheen, or “schistosity” to the rock.
- scoria.** A bomb-size pyroclast that is irregular in form and generally very vesicular.
- scoriaceous.** Volcanic igneous vesicular texture involving relatively large gas holes such as in vesicular basalt. Coarser than pumiceous.
- sediment.** An eroded and deposited, unconsolidated accumulation of rock and mineral fragments.
- sedimentary rock.** A consolidated and lithified rock consisting of clastic and/or chemical sediment(s). One of the three main classes of rocks—igneous, metamorphic, and sedimentary.
- shale.** A clastic sedimentary rock made of clay-sized particles that exhibit parallel splitting properties.
- sheetwash (sheet erosion).** The removal of thin layers of surface material more or less evenly from an extensive area of gently sloping land by broad continuous sheets of running water rather than by streams flowing in well-defined channels.
- shoreface.** The zone between the seaward limit of the shore and the more nearly horizontal surface of the offshore zone; typically extends seaward to storm wave depth or about 10 m (32 ft).
- silicate.** A compound whose crystal structure contains the SiO₄ tetrahedra.
- sill.** A tabular igneous intrusion that parallels the bedding or foliation of sedimentary and metamorphic country rock, respectively.
- silt.** Clastic sedimentary material intermediate in size between fine-grained sand and coarse clay (1/256 to 1/16 mm [0.00015 to 0.002 in]).
- siltstone.** A variably lithified sedimentary rock composed of silt-sized grains.
- sinkhole.** A circular depression in a karst area with subterranean drainage; is commonly funnel-shaped.
- slump.** A generally large, coherent mass movement with a concave-up failure surface and subsequent backward rotation relative to the slope.
- spatter cone.** A low, steep-sided cone of spatter built up on a fissure of vent, usually composed of basaltic material.
- spreading center.** A divergent boundary where two lithospheric plates are spreading apart. It is a source of new crustal material.
- spring.** A site where water issues from the surface due to the intersection of the water table with the ground surface.
- strata.** Tabular or sheet-like masses or distinct layers of sedimentary rock. Plural of *stratum*.
- stratification.** The accumulation, or layering of sedimentary rocks in strata. Tabular, or planar, stratification refers to essentially parallel surfaces. Cross-stratification refers to strata inclined at an angle to the main stratification.
- stratigraphy.** The geologic study of the origin, occurrence, distribution, classification, correlation, and age of rock layers, especially sedimentary rocks.
- stratovolcano.** A volcano that is constructed of alternating layers of lava and pyroclastic deposits, along with abundant dikes and sills.
- stream.** Any body of water moving under gravity flow in a clearly confined channel.
- stream channel.** A long, narrow depression shaped by the concentrated flow of a stream and covered continuously or periodically by water.
- stream terrace.** Step-like benches surrounding the present floodplain of a stream due to dissection of previous flood plain(s), stream bed(s), and/or valley floor(s).
- strike.** The compass direction of the line of intersection of an inclined surface with a horizontal plane.
- structural geology.** The branch of geology that deals with the description, representation, and analysis of structures, chiefly on a moderate to small scale. The subject is similar to tectonics, but the latter is generally used for the broader regional or historical phases.

- structure.** The attitude and relative positions of the rock masses of an area resulting from such processes as faulting, folding, and igneous intrusions.
- subduction zone.** A convergent plate boundary where oceanic lithosphere descends beneath a continental or oceanic plate and is carried down into the mantle.
- subsidence.** The gradual sinking or depression of part of Earth's surface.
- syncline.** A downward curving (concave up) fold with layers that dip inward; the core of the syncline contains the stratigraphically-younger rocks.
- talus.** Rock fragments, usually coarse and angular, lying at the base of a cliff or steep slope from which they have been derived.
- tectonic.** Relating to large-scale movement and deformation of Earth's crust.
- terrace.** A relatively level bench or step-like surface breaking the continuity of a slope (also see "stream terrace").
- terrane.** A large region or group of rocks with similar geology, age, or structural style.
- terrestrial.** Relating to land, Earth, or its inhabitants.
- terrigenous.** Derived from the land or a continent.
- thrust fault.** A contractional dip-slip fault with a shallowly dipping fault surface (less than 45°) where the hanging wall moves up and over relative to the footwall.
- tongue (stratigraphy).** A member of a formation that extends and wedges out away from the main body of a formation.
- topography.** The general morphology of Earth's surface, including relief and locations of natural and anthropogenic features.
- trace (fault).** The exposed intersection of a fault with Earth's surface.
- trace fossil.** Tracks, trails, burrows, coprolites (dung), etc., that preserve evidence of organisms' life activities, rather than the organisms themselves.
- transform fault.** A strike-slip fault that links two other faults or two other plate boundaries.
- transgression.** Landward migration of the sea as a result of a relative rise in sea level.
- transverse dune.** Dune elongated perpendicular to the prevailing wind direction. The leeward slope stands at or near the angle of repose of sand whereas the windward slope is comparatively gentle.
- tuff.** Generally fine-grained, igneous rock formed of consolidated volcanic ash.
- type locality.** The geographic location where a stratigraphic unit (or fossil) is well displayed, formally defined, and derives its name. The place of original description.
- unconfined groundwater.** Groundwater that has a water table; i.e., water not confined under pressure beneath a confining bed.
- unconformity.** A substantial break or gap in the geologic record where a rock unit is overlain by another that is not next in stratigraphic succession.
- undercutting.** The removal of material at the base of a steep slope or cliff or other exposed rock by the erosive action of falling or running water (such as a meandering stream), of sand-laden wind in the desert, or of waves along the coast.
- uplift.** A structurally high area in the crust, produced by movement that raises the rocks.
- vent.** An opening at Earth's surface where volcanic materials emerge.
- vesicle.** A void in an igneous rock formed by a gas bubble trapped when the lava solidified.
- vesicular.** Describes a volcanic rock with abundant holes that formed from the expansion of gases while the lava was still molten.
- volcanic.** Describes anything related to volcanoes. Can refer to igneous rock crystallized at or near Earth's surface (e.g., lava).
- volcanic arc.** A commonly curved, linear, zone of volcanoes above a subduction zone.
- volcaniclastic.** Describes clastic volcanic materials formed by any process of fragmentation, dispersed by any kind of transporting agent, deposited in any environment.
- volcanogenic.** Describes material formed by volcanic processes.
- wash.** A term used especially in the southwestern United States for the broad, gravelly dry bed of an intermittent stream, generally in the bottom of a canyon; it is occasionally swept by a torrent of water.
- water table.** The upper surface of the saturated zone; the zone of rock in an aquifer saturated with water.
- weathering.** The physical, chemical, and biological processes by which rock is broken down.
- xenolith.** A rock particle, formed elsewhere, entrained in magma as an inclusion.

Literature Cited

This section lists references cited in this report. A more complete geologic bibliography is available from the National Park Service Geologic Resources Division.

- Agenbroad, L.D. and J.I. Mead. 1989. Quaternary geochronology and distribution of *Mammuthus* on the Colorado Plateau. *Geology* 17 (9):861-864.
- Anderson, T.H., and J.A. Nourse. 2005. Pull-apart basins at releasing bends of the sinistral Late Jurassic Mojave-Sonora fault system. Special Paper 393. Geological Society of America, Boulder, Colorado, USA.
- Anderson, T.H., and L.T. Silver. 2005. The Mojave-Sonora megashear; field and analytical studies leading to the conception and evolution of the hypothesis. Special Paper 393. Geological Society of America, Boulder, Colorado, USA.
- Arizona Earthquake Information Center. 2009. Halloween earthquake swarm near Sunset Crater, AZ. (<http://www4.nau.edu/geology/aeic/bulletins/09031HalloweenSwarm.html>). Accessed 12 August 2010.
- Arizona Earthquake Information Center. 2010. Arizona quake history. (http://www4.nau.edu/geology/aeic/eq_history.html). Accessed 12 August 2010.
- Arizona Geological Survey. 2010. Oil, gas, & helium production report. (http://www.azogcc.az.gov/production_monthly/2010_08.pdf). Accessed 21 February 2011.
- Beus, S.S. 1990. Redwall Limestone and Surprise Canyon Formation. Pages 119-147, in S.S. Beus and M. Morales, editors. Grand Canyon Geology. Oxford University Press, New York, New York, USA.
- Biek, R.F., G.C. Willis, M.D. Hylland, and H.H. Doelling. 2000. Geology of Zion National Park, Utah, Pages 107-138 in D.A. Sprinkel, T.C. Chidsey, Jr., and P.B. Anderson, editors. Geology of Utah's Parks and Monuments. Utah Geological Association Publication 28, Salt Lake City, Utah, USA.
- Billingsley, G.H. 1989. Mesozoic strata at Lees Ferry, Arizona. Pages 67-71 in S. Beus, editor. Centennial Field Guide 2. Rocky Mountain Section of the Geological Society of America, Denver, Colorado, USA.
- Billingsley, G.H., S.S. Priest, and T.J. Felger. 2007A. Geologic map of Wupatki National Monument and vicinity, Coconino County, northern Arizona. U. S. Geological Survey Scientific Investigations Map 2958 (scale 1:24,000) and pamphlet. (<http://pubs.usgs.gov/sim/2007/2958>). Accessed 19 July 2010.
- Billingsley, G.H., S.S. Priest, and T.J. Felger. 2007B. Geologic map of the Cameron 30' x 60' quadrangle, Coconino County, northern Arizona. U. S. Geological Survey Scientific Investigations Map 2977 (scale 1:100,000) and pamphlet. (<http://pubs.usgs.gov/sim/2007/2977>). Accessed 23 August 2010.
- Bilodeau, W.L., C.F. Kluth, and L.K. Vedder. 1987. Regional stratigraphic, sedimentologic and tectonic relationships of the Glance Conglomerate in southeastern Arizona. Pages 229-256 in W.R. Dickinson and M.A. Klute, editors. Mesozoic rocks of southern Arizona and adjacent areas. Digest 18. Arizona Geological Society, Tucson, Arizona, USA.
- Blakemore, E.T. 2003. Water-quality data for Walnut Canyon and Wupatki National Monuments, Arizona: 2001 – 02. Open-file Report 03-286. U.S. Geological Survey, Reston, Virginia, USA. (<http://pubs.usgs.gov/of/2003/ofr03286/pdf/ofr03-286.pdf>). Accessed 26 July 2010.
- Blakey, R.C. 1980. Pennsylvanian and Early Permian paleogeography, southern Colorado Plateau and vicinity. Pages 239-258 in T.D. Fouch and E.R. Magathan, editors. Paleozoic paleogeography of west-central United States. Rocky Mountain Section, Society of Economic Paleontologists and Mineralogists, Denver, Colorado. USA.
- Blakey, R.C. 1988. Controls on eolian, sabkha, and fluvial coastal plain deposits in the Moenkopi Formation (Lower Triassic), northern Arizona. Geological Society of America Abstracts with Programs 20:A317.
- Blyth, C.P. 1995. The Cenozoic evolution of Wupatki National Monument. Thesis. Northern Arizona University, Flagstaff, Arizona, USA.
- Bollin, E.M. and Kerr, P.F. 1958. Uranium mineralization near Cameron, Arizona. Pages 164-168 in R.V. Anderson and J.W. Harshbarger, editors. New Mexico Geological Society, fall field conference guidebook 9 Black Mesa Basin, northeastern Arizona. New Mexico Geological Society, Socorro, New Mexico, USA.
- Braille, L. W. 2009. Seismic monitoring. Pages 229-244 in R. Young and L. Norby, editors. Geological monitoring. Geological Society of America, Boulder, Colorado, USA. (<http://nature.nps.gov/geology/monitoring/seismic.cfm>). Accessed 10 June 2011.
- Breed, W.J. 1969. A Pliocene river channel in Wupatki National Monument, Arizona. *Journal of the Arizona Academy of Science* 5 (3):177-181.

- Butler, W.C. 1995. Northern Arizona province (024). Pages 1-11, *in* D. L. Gautier, B. L. Dolton, K. I. Takahashi, and K. L. Varnes, editors. 1995 National assessment of United States oil and gas resources: Results, methodology, and supporting data. U.S. Geological Survey Digital Data Series DDS-30. U.S. Geological Survey, Reston, Virginia, USA. (<http://certmapper.cr.usgs.gov/data/noga95/prov24/text/prov24.pdf>). Accessed 9 August 2010.
- Cheevers, C.W. 1980. Stratigraphic analysis of the Kaibab Formation in northern Arizona, southern Utah, and southern Nevada. Thesis. Northern Arizona University, Flagstaff, Arizona, USA.
- Cheevers, C.W. and R.R. Rawson. 1979. Facies analysis of the Kaibab Formation in northern Arizona, southern Utah, and southern Nevada. *Permianland: Four Corners Geological Society Guidebook*, p. 105-113.
- Christiansen, E. II, B.J. Kowallis, and M.D. Barton. 1994. Temporal and spatial distribution of volcanic ash in Mesozoic sedimentary rocks of the Western Interior: An alternative record of Mesozoic magmatism. Pages 73-94 *in* M.V. Caputo, J.A. Peterson, and K.J. Franczyk, editors. *Mesozoic systems of the Rocky Mountain region, USA*. Rocky Mountain Section, SEPM (Society for Sedimentary Geology), Denver, Colorado, USA.
- Colton, H.S. 1932. Sunset Crater: The effect of a volcanic eruption on the ancient Pueblo people. *Geographical Review* 22:582-590.
- Conway, C.M. and L.T. Silver. 1989. Early Proterozoic rocks (1710 – 1615 Ma) in central to southeastern Arizona. Pages 165-186 *in* J.P. Jenny and S.J. Reynolds, editors. *Geologic evolution of Arizona*. Arizona Geological Society Digest 17, Tucson, Arizona, USA.
- Conway, F.M., C.B. Connor, B.E. Hill, C.D. Condit, K. Mullaney, and C.M. Hall. 1998. Recurrence rates of basaltic volcanism in SP cluster, San Francisco volcanic field, Arizona. *Geology* 26 (7):655-658.
- Crossey, L.J., T.P. Fischer, P.J. Patchett, K.E. Karlstrom, D.R. Hilton, D.L. Newell, P. Huntoon, A.C. Reynolds, and G.A.M. de Leeuw. 2006. Dissected hydrologic system at the Grand Canyon; interaction between deeply derived fluids and plateau aquifer waters in modern springs and travertine. *Geology* 34 (1):25-28.
- Dickinson, W.R. 1981. Plate Tectonic Evolution of the Southern Cordillera. *Arizona Geological Society Digest* 14:113-135.
- Dubiel, R.F. 1994. Triassic deposystems, paleogeography, and paleoclimate of the Western Interior. Pages 133-168 *in* M.V. Caputo, J.A. Peterson, and K.J. Franczyk, editors. *Mesozoic systems of the Rocky Mountain region, USA*. Rocky Mountain Section, SEPM (Society for Sedimentary Geology), Denver, Colorado, USA.
- Duffield, W., P. Morgan, and J.H. Sass. 2000. Untapped potential? The San Francisco volcanic field, Arizona. *Geothermal Resources Council Bulletin* 29 (3):97-99.
- Elder, W.P., and J.I. Kirkland. 1994. Cretaceous paleogeography of the southern Western Interior Region. Pages 415-440 *in* M.V. Caputo, J.A. Peterson, and K.J. Franczyk, editors. *Mesozoic systems of the Rocky Mountain region*. Rocky Mountain Section, Society for Sedimentary Geology, Denver, Colorado, USA.
- Environmental Protection Agency. 2010. Arizona water facts. (http://www.epa.gov/WaterSense/water_efficiency/arizona.html). Accessed 21 December 2010.
- Graham, J. 2008. Walnut Canyon National Monument geologic resources inventory report. Natural Resource Report NPS/NRPC/GRD/NRR-2008/040, Geologic Resources Division, Denver, Colorado, USA. (http://www.nature.nps.gov/geology/inventory/gre_publications.cfm). Accessed 28 December 2010.
- Graham, J. 2009. Chiricahua National Monument geologic resources inventory report. Natural Resource Report NPS/NRPC/GRD/NRR-2009/081, Geologic Resources Division, Denver, Colorado, USA. (http://www.nature.nps.gov/geology/inventory/gre_publications.cfm). Accessed 28 December 2010.
- Greco, D., M. Ziegenbein, and P. Benjamin. 2000. Wupatki National Monument, disturbed land inventory and recommendations. Trip report, National Park Service, Geologic Resources Division, Denver, Colorado, USA.
- Haenggi, W.T., and W.R. Muehlberger. 2005. Chihuahua Trough; a Jurassic pull-apart basin. *Special Paper* 393. Geological Society of America, Boulder, Colorado, USA.
- Hamblin, W.K. 2003. Late Cenozoic lava dams in the Western Grand Canyon. Pages 313-345 *in* S.S. Beus and M. Morales, editors. *Grand Canyon Geology*. Oxford University Press, 2nd edition, New York, New York, USA.
- Hanson, S.L. 2006. Correlation of lava flows at Wupatki National Monument, northern Arizona. *Abstracts with Programs – Geological Society of America* 38 (7): 36.

- Hanson, S.L. 2007. Characterization and correlation of lava flows in Wupatki National Monument, northern Arizona. Report submitted to Western National Parks Association in fulfillment of Wupatki National Monument Research Grant 06-11. Western National Parks Association, Tucson, Arizona, USA.
- Hoffman, P.F. 1989. Precambrian geology and tectonic history of North America. Pages 447-512, *in* A.W. Bally and A.R. Palmer, editors. *The Geology of North America: An Overview*, Vol. A, The Geological Society of America, Boulder, Colorado, USA.
- Holm, R.F. 1988. Geologic map of San Francisco Mountain, Elden Mountain, and Dry Lake Hills, Coconino County, Arizona. U.S. Geologic Survey Miscellaneous Investigations Series I-1663 (scale 1:24,000). (http://ngmdb.usgs.gov/Prodesc/proddesc_9878.htm). Accessed 28 December 2010.
- Hooten, J.A., M.H. Ort, and M.D. Elson. 2001. The origin of cinders in Wupatki National Monument. Report prepared for Southwest Parks and Monuments Association Grant FY00-11. Technical Report 2001-12. Desert Archaeology, Inc., Tucson, Arizona, USA.
- Hopkins, R.L. 1990. Kaibab Formation. Pages 225-246, *in* S.S. Beus and M. Morales, editors. *Grand Canyon Geology*. Oxford University Press, New York, New York, USA.
- Hunt, A.P., S.G. Lucas, V.L. Santucci, and D.K. Elliot, 2005. Permian vertebrates of Arizona. Pages 10-15 *in* A.B. Heckert and S.G. Lucas, editors. *Vertebrate paleontology in Arizona*. Bulletin 29, New Mexico Museum of Natural History and Science, Albuquerque, New Mexico, USA.
- Huntoon, P.W. 2003. Post-Precambrian tectonism in the Grand Canyon region. Pages 222-259, *in* S.S. Beus and M. Morales, editors. *Grand Canyon Geology*, 2nd edition. Oxford University Press, New York, New York, USA.
- Kauffman, E.G., 1977, Geological and biological overview: Western Interior Cretaceous basin. *Mountain Geologist* 14: 75-99.
- Karl, T. R., Melillo, J. M., and Peterson, T. C., 2009, Global climate change impacts in the United States. Cambridge University Press, New York, New York, USA. (<http://www.globalchange.gov/publications/reports/scientific-assessments/us-impacts>). Accessed 9 September 2010.
- KellerLynn, K. 2010. Petrified Forest National Park: geologic resources inventory report. Natural Resource Report NPS/NRPC/GRD/NRR—2010/218. National Park Service, Fort Collins, Colorado. (http://www.nature.nps.gov/geology/inventory/gre_publications.cfm#P). Accessed 10 June 2011.
- Kluth, C.F. 1983. Geology of the northern Canelo Hills and implications for the Mesozoic tectonics of southeastern Arizona. Pages 159-171 *in* M.W. Reynolds and E.D. Dolly, editors. *Mesozoic paleogeography of west-central United States*. Rocky Mountain Section, Society of Economic Paleontologists and Mineralogists, Denver, Colorado, USA.
- Lawton, T.F. 1994. Tectonic setting of Mesozoic sedimentary basins, Rocky Mountain region, United States. Pages 1-26 *in* M.V. Caputo, J.A. Peterson, and K.J. Franczyk, editors. *Mesozoic systems of the Rocky Mountain region, USA*. Rocky Mountain Section, SEPM (Society for Sedimentary Geology), Denver, Colorado, USA.
- Lillie, R.J. 2005. *Parks and Plates: The geology of our national parks, monuments, and seashores*. W.W. Norton and Co., New York, New York, USA.
- Lindsay, E. and N.T. Tessman. 1974. Cenozoic vertebrate localities and faunas in Arizona. *Journal of the Arizona Academy of Science* 9 (1):3-24.
- Lipman, P.W. and J.T. Hagstrum. 1992. Jurassic ash-flow sheets, calderas, and related intrusions of the Cordilleran volcanic arc in southeastern Arizona: Implications for regional tectonics and ore deposits. *Geological Society of America Bulletin* 104: 32-39.
- Lucchitta, I. 2003. History of the Grand Canyon and of the Colorado River in Arizona. Pages 260-274 *in* S.S. Beus and M. Morales, editors. *Grand Canyon Geology*. Oxford University Press, 2nd edition, New York, New York, USA.
- Lucchitta, I., and Jeanne, R.A. 2001. Geomorphic features and processes of the Shivwits Plateau, Arizona, and their constraints on the age of western Grand Canyon. Pages 65-70 *in* R.A. Young and E.E. Spamer, editors. *Colorado River: Origin and Evolution; Proceedings of a symposium held at Grand Canyon National Park in June, 2000*. Monograph 12, Grand Canyon Association, Grand Canyon, Arizona, USA.
- Luedke, R.G. and R.L. Smith. 1991. Quaternary volcanism in the western conterminous United States. Pages 75-92 *in* R.B. Morrison, editor. *Quaternary nonglacial geology: Conterminous U.S. The Geology of North America K-2*, The Geological Society of America, Boulder, Colorado, USA.
- Marshak, S., K. Karlstorm, and J.M. Timmons. 2000. Inversion of Proterozoic extensional faults: An explanation for the pattern of Laramide and Ancestral Rockies intracratonic deformation, United States. *Geological Society of America Bulletin* 28:735-738.

- McCormack, D.C. 1989. The geology of Wupatki National Monument, northern Arizona. Thesis. Northern Arizona University, Flagstaff, Arizona, USA.
- McKee, E.D. 1958. The Redwall Limestone. Pages 74-77 in R.V. Anderson and J.W. Harshbarger, editors. New Mexico Geological Society, fall field conference guidebook – 9 Black Mesa Basin, northeastern Arizona. New Mexico Geological Society, Socorro, New Mexico, USA.
- Middleton, L.T., D.K. Elliott, and M. Morales. 1990. Coconino Sandstone. Pages 183-202 in S.S. Beus and M. Morales, editors. Grand Canyon Geology. Oxford University Press, New York, New York, USA.
- Moore, R.B., and E.W. Wolfe. 1976. Geologic map of the eastern San Francisco volcanic field, Arizona. U.S. Geological Survey Miscellaneous Investigations Series I-0953 (scale 1:50,000). (http://ngmdb.usgs.gov/Prodesc/proddesc_9837.htm). Accessed 19 July 2010.
- Morales, M. 2003. Mesozoic and Cenozoic strata of the Colorado Plateau near the Grand Canyon. Pages 212-221 in S.S. Beus and M. Morales, editors. Grand Canyon Geology. Oxford University Press, 2nd edition, New York, New York, USA.
- Morgan, P., J.H. Sass, and W. Duffield. 2004. Geothermal resource evaluation program of the eastern San Francisco Volcanic Field, Arizona. Department of Geology, Northern Arizona University, technical report prepared for the U.S. Department of Energy contract under DE-FC04-2002AL68298.
- Morris, T.H., V.W. Manning, and S.M. Ritter. 2000. Geology of Capitol Reef National Park, Utah. Pages 85-106 in D.A. Sprinkel, T.C. Chidsey, Jr., and P.B. Anderson, editors. Geology of Utah's Parks and Monuments. Utah Geological Association Publication 28, Salt Lake City, Utah, USA.
- National Park Service. 2006. Wupatki Pueblo. (<http://www.nps.gov/wupa/planyourvisit/wupatki-pueblo.htm>). Accessed 19 July 2010.
- National Park Service. 2007A. First annual centennial strategy for Flagstaff area national monuments. (http://home.nps.gov/wupa/parkmgmt/upload/FLAG_Centennial_Strategy.pdf). Accessed 3 January 2011.
- National Park Service. 2007B. The breathing Earth: Wupatki blowholes. (<http://www.nps.gov/wupa/planyourvisit/brochures.htm>). Accessed 20 July 2010.
- National Park Service, Sonoran Desert Network. 2010. Climate change in the Sonoran Desert Network. (http://science.nature.nps.gov/im/climate/docs/SODN_climate_change_brief.pdf). Accessed 21 December 2010.
- Nations, J.D., D.J. Brennan, and R.A. Ybarra. 1989. Oil and gas in Arizona. Pages 795-815 in J. P. Jenney and S. J. Reynolds, editors. Geologic evolution of Arizona. Arizona Geological Society Digest 17, Arizona Geological Survey, Tucson, Arizona, USA.
- Newhall, C.G., G.E. Ulrich, and E.W. Wolfe. 1987. Geologic map of the southwest part of the San Francisco volcanic field, north-central Arizona. U.S. Geological Survey Miscellaneous Field Studies Map MF-1958 (scale 1:50,000). (<http://pubs.er.usgs.gov/publication/mf1958>). Accessed 20 July 2010.
- Noble, D.G. 1991. Ancient ruins of the Southwest. Northland Publishing, Flagstaff, Arizona, USA.
- Northern Arizona University, Department of Anthropology. 2010. History of archaeological studies at Wupatki. Anthropology Laboratories of Northern Arizona University. (<http://jan.ucc.nau/d-antlab/Wupatki/history.htm>). Accessed 19 July 2010.
- Oldow, J.S., A.W. Bally, H.G. Avé Lallemant, and W.P. Leeman. 1989. Phanerozoic evolution of the North American Cordillera; United States and Canada. Pages 139-232 in A.W. Bally and A.R. Palmer, editors. The geology of North America: An overview. The Geology of North America-A, Geological Society of America, Boulder, Colorado, USA.
- Ort, M.H., M.D. Elson, K.C. Anderson, W.A. Duffield, and T.L. Samples. 2008. Variable effects of cinder-cone eruptions on prehistoric agrarian human populations in the American southwest. Journal of Volcanology and Geothermal Research 176 (3):363-376.
- Pallister, J.S. and E.A. du Bray. 1997. Interpretive map and guide to the volcanic geology of Chiricahua National Monument and vicinity, Cochise County, Arizona. U.S. Geological Survey, Miscellaneous Investigations Series Map I-2541 (scale 1:24,000).
- Peterson, J.A. 1980. Permian paleogeography and sedimentary provinces, west central United States. Pages 271-292 in T.D. Fouch and E.R. Magathan, editors. Paleozoic paleogeography of the West-Central United States. Rocky Mountain Section, SEPM (Society for Sedimentary Geology), Denver, Colorado, USA.
- Peterson, F. 1994. Sand dunes, sabkhas, streams, and shallow seas: Jurassic paleogeography in the southern part of the Western Interior Basin. Pages 233-272 in M.V. Caputo, J.A. Peterson, and K.J. Franczyk, editors. Mesozoic systems of the Rocky Mountain region. Rocky Mountain Section, Society for Sedimentary Geology, Denver, Colorado, USA.

- Priest, S.S., W.A. Duffield, K. Malis-Clark, J.W. Hendley II, and P.H. Stauffer. 2001. The San Francisco Volcanic Field, Arizona. U.S. Geological Survey Fact Sheet 017-01. (<http://geopubs.wr.usgs.gov/fact-sheet/fs017-01>). Accessed 13 August 2010.
- Raup, D.M. 1991. *Extinction: Bad Genes or Bad Luck?* W.W. Norton and Company, New York, New York, USA.
- Rauzi, S.L. 1994. Geothermal test hints at oil potential in eastern Arizona volcanic field. *Oil & Gas Journal* 92 (1): 52-54.
- Rauzi, S.L. 2001. Report lists Arizona's oil, gas potential. *Oil & Gas Journal* 99 (12): 36-38, 40.
- Rauzi, S.L. 2010. Oil and gas fields in Arizona. Arizona Oil and Gas Conservation Commission, Tucson, Arizona, USA. (<http://www.azogcc.az.gov>). Accessed 10 August 2010.
- Rauzi, S.L. and L.D. Fellows. 2003. Arizona has helium. *Arizona Geology* 33 (4): 1-4. (<http://www.azogcc.az.gov/resources/Winter2003helium.pdf>). Accessed 11 August 2010.
- Santucci, V. L., J. P. Kenworthy, and A. L. Mims. 2009. Monitoring in situ paleontological resources. Pages 189-204 in R. Young and L. Norby, editors. *Geological Monitoring*. Geological Society of America, Boulder, Colorado, USA. (<http://nature.nps.gov/geology/monitoring/paleo.cfm>). Accessed 6 June 2011.
- Scarborough, R.B. 1981. Radioactive occurrences and uranium production in Arizona, part 3. Arizona Bureau of Geology and Mineral Technology, Tucson, Arizona, USA. (<http://www.admmr.state.az.us/DigitalLibrary/AEC-DOE/GJBX143-81UraniumProductionArizonaPart3.pdf>). Accessed 29 July 2010.
- Self, S., M.H. Ort, and R.C. Amos. 2010. Interpretation of the c. AD 1075 eruption of Sunset Crater, Arizona, USA. *Abstracts with Programs - Geological Society of America* 42 (4):95.
- Spencer, J.E., L. Peters, W.C. McIntosh, and P.J. Patchett. 2001. $^{40}\text{Ar}/^{39}\text{Ar}$ Geochronology of the Hualapai Limestone and Bouse Formation and implications for the age of the Lower Colorado River. Pages 89-92 in R.A. Young and E.E. Spamer, editors. *Colorado River: Origin and Evolution; Proceedings of a symposium held at Grand Canyon National Park in June, 2000*. Monograph 12, Grand Canyon Association, Grand Canyon, Arizona, USA.
- Stevens, C.H., P. Stone, and J.S. Miller. 2005. A new reconstruction of the Paleozoic continental margin of southwestern North America; implications for the nature and timing of continental truncation and the possible role of the Mojave-Sonora megashear. *Special Paper 393*. Geological Society of America, Boulder, Colorado, USA.
- Stewart, J.H., F.G. Poole, and R.F. Wilson. 1972. Stratigraphy and origin of the Triassic Moenkopi Formation and related strata in the Colorado Plateau region with a section on sedimentary petrology by R.A. Cadigan. U.S. Geological Survey Professional Paper 691, U.S. Geological Survey, Reston, Virginia, USA.
- Tanaka, K.L., E.M. Shoemaker, G.E. Ulrich, and E.W. Wolfe. Migration of volcanism in the San Francisco volcanic field, Arizona. *Geological Society of American Bulletin* 97:129-141.
- Thornberry-Ehrlich, T. 2005. *Thornberry-Ehrlich, T. 2005. Sunset Crater Volcano National Monument Geologic Resource Evaluation Report. Natural Resource Report NPS/NRPC/GRD/NRR—2005/004*. National Park Service, Denver, Colorado. (http://www.nature.nps.gov/geology/inventory/gre_publications.cfm#S). Accessed 11 July 2011.
- Toomey, R.S., III, 2009. Geological monitoring of caves and associated landscapes. Pages 27-46 in R. Young and L. Norby, editors. *Geological monitoring*. Geological Society of America, Boulder, Colorado, USA. (<http://nature.nps.gov/geology/monitoring/cavekarst.cfm>). Accessed 11 July 2011.
- Tosdal, R.M., G.B. Haxel, and J.E. Wright. 1989. Jurassic geology of the Sonoran Desert region, southern Arizona, southeastern California, and northernmost Sonora: Construction of a continental-margin magmatic arc. Pages 397-434 in J.P. Jenny and S.J. Reynolds, editors. *Geologic evolution of Arizona. Digest 17*. Arizona Geological Society, Tucson, Arizona, USA.
- Turner, C.E. 1990. Toroweap Formation. Pages 203-224 in S.S. Beus and M. Morales, editors. *Grand Canyon Geology*. Oxford University Press, New York, New York, USA.
- Tweet, J.S., V.L. Santucci, J.P. Kenworthy, and A.L. Mims. 2009. Paleontological resource inventory and monitoring: Southern Colorado Plateau Network. *Natural Resource Technical Report NPS/NRPC/NRTR – 2009/245*, National Park Service, Natural Resource Stewardship and Science Directorate, Fort Collins, Colorado, USA.
- Ulrich, G.E. and N.G. Bailey. 1987. Geologic map of the SP part of the San Francisco Volcanic Field, north-central Arizona. U.S. Geologic Survey Miscellaneous Field Studies map MF-1956 (scale 1:24,000).

- Ulrich, G.E., G.H. Billingsley, R. Hereford, E.W. Wolfe, L.D. Nealey, and R.L. Sutton. 1984. Map showing geology, structure, and uranium deposits of the Flagstaff 1° x 2° quadrangle, Arizona. U.S. Geological Survey Miscellaneous Investigations Series Map I-1446 (scale 1:250,000).
- U.S. Geological Survey. 2004. Major floods and droughts in Arizona. (http://geochange.er.usgs.gov/sw/impacts/hydrology/state_fd/azwater1.html). Accessed 21 December 2010.
- Wenrich, K.J. 2010. Uranium mining in Arizona – high grade and safe. Liberty Star uranium and Metals Corporation, Tucson, Arizona, USA. (<http://www.libertystaruranium.com/www/links-articles/uranium-mining-in-arizona-high-grade-and-safe>). Accessed 26 July 2010.
- Wenrich, K.J., W.L. Chenoweth, W.I. Finch, and R.B. Scarborough. 1989. Uranium in Arizona. Pages 759-794, in J. P. Jenney and S. J. Reynolds, editors. Geologic evolution of Arizona. Arizona Geological Society Digest 17, Arizona Geological Survey, Tucson, Arizona, USA.
- Wolfe, E.W., G.E. Ulrich, R.F. Holm, R.B. Moore, and C.G. Newhall. 1987. Geologic map of the central part of the San Francisco volcanic field, north-central Arizona. U.S. Geological Survey Miscellaneous Field Studies Map MF-1959 (scale 1:50,000).

Additional References

This section lists additional references, resources, and web sites that may be of use to resource managers. Web addresses are current as of June 2011.

Geology of National Park Service Areas

National Park Service Geologic Resources Division (Lakewood, Colorado). <http://nature.nps.gov/geology/>

NPS Geologic Resources Inventory. http://www.nature.nps.gov/geology/inventory/gre_publications.cfm

National Fossil Day (annually; the Wednesday of Earth Science Week). <http://nature.nps.gov/geology/nationalfossilday/>.

Harris, A. G., E. Tuttle, and S. D. Tuttle. 2003. *Geology of National Parks*. Sixth Edition. Kendall/Hunt Publishing Co., Dubuque, Iowa, USA.

Kiver, E. P. and D. V. Harris. 1999. *Geology of U.S. parklands*. John Wiley and Sons, Inc., New York, New York, USA.

NPS Geoscientist-in-the-parks (GIP) internship and guest scientist program. <http://www.nature.nps.gov/geology/gip/index.cfm>

Resource Management/Legislation Documents

NPS 2006 Management Policies (Chapter 4; Natural Resource Management): http://www.nps.gov/policy/mp/policies.html#_Toc157232681

NPS-75: Natural Resource Inventory and Monitoring Guideline: <http://www.nature.nps.gov/nps75/nps75.pdf>.

NPS Natural Resource Management Reference Manual #77: <http://www.nature.nps.gov/Rm77/>

Young, R. and L. Norby, editors. 2009. *Geological Monitoring*. Geological Society of America, Boulder, Colorado, USA. <http://nature.nps.gov/geology/monitoring/index.cfm>

NPS Technical Information Center (Denver, repository for technical (TIC) documents): <http://etic.nps.gov/>

State Geological Survey Websites

Arizona Geological Survey: <http://www.azgs.state.az.us/>

Association of American State Geologists: <http://www.stategeologists.org/>

Geological Society Resources

Geological Society of America: <http://www.geosociety.org/>

American Geological Institute (AGI): <http://www.agiweb.org/>

AGI Earth Science Week: <http://www.earthsciweek.org/>

Bates, R. L. and J. A. Jackson, editors. *American Geological Institute dictionary of geological terms* (3rd Edition). Bantam Doubleday Dell Publishing Group, New York, New York, USA.

United States Geological Survey (USGS)

U.S. Geological Survey: <http://www.usgs.gov/>

U.S. Geological Survey National Geologic Map Database (NGMDB): <http://ngmdb.usgs.gov/>

U.S. Geological Survey Geologic Names Lexicon (GEOLEX; geologic unit nomenclature and summary): http://ngmdb.usgs.gov/Geolex/geolex_home.html

U.S. Geological Survey Geographic Names Information System (GNIS; search for place names and geographic features, and plot them on topographic maps or aerial photos): <http://gnis.usgs.gov/>

U.S. Geological Survey GeoPDFs (download searchable PDFs of any topographic map in the United States): <http://store.usgs.gov> (click on "Map Locator").

U.S. Geological Survey Publications Warehouse (many USGS publications are available online): <http://pubs.usgs.gov>

U.S. Geological Survey, description of physiographic provinces: <http://tapestry.usgs.gov/Default.html>

Appendix: Scoping Session Participants

The following is a list of participants from the GRI scoping session for Wupatki National Monument, held on June 28-29, 2001. The contact information and email addresses in this appendix may be outdated; please contact the Geologic Resources Division for current information. The scoping meeting summary was used as the foundation for this GRI report. The original scoping summary document is available on the GRI publications web site: http://www.nature.nps.gov/geology/inventory/gre_publications.cfm.

Name	Affiliation	Position	Phone	E-mail
Connors, Tim	NPS Geologic Resources Division	Geologist	303-969-2093	Tim_Connors@nps.gov
Fairley, Helen	NPS Flagstaff		928-526-1157	Helen_fairley@nps.gov
Graham, John	Colorado State University	Geologist	970-225-6333	rockdoc250@comcast.net
Hanson, Sarah	NPS Sunset Crater National Monument	Geologist in the Park (GIP)	520-526-0502 517-264-3944	Slhanson@adrian.edu
Tancreto, Nicole	NPS, Flagstaff		928-556-7466, ext. 240	Nicole_tancreto@nps.gov
Whitefield, Paul	NPS, Flagstaff	Natural Resource Manager	928-526-1157	Paul_whitefield@nps.gov

The Department of the Interior protects and manages the nation's natural resources and cultural heritage; provides scientific and other information about those resources; and honors its special responsibilities to American Indians, Alaska Natives, and affiliated Island Communities.

NPS 322/108082, June 2011

National Park Service
U.S. Department of the Interior



Natural Resource Stewardship and Science

1201 Oakridge Drive, Suite 150
Fort Collins, CO 80525

www.nature.nps.gov